

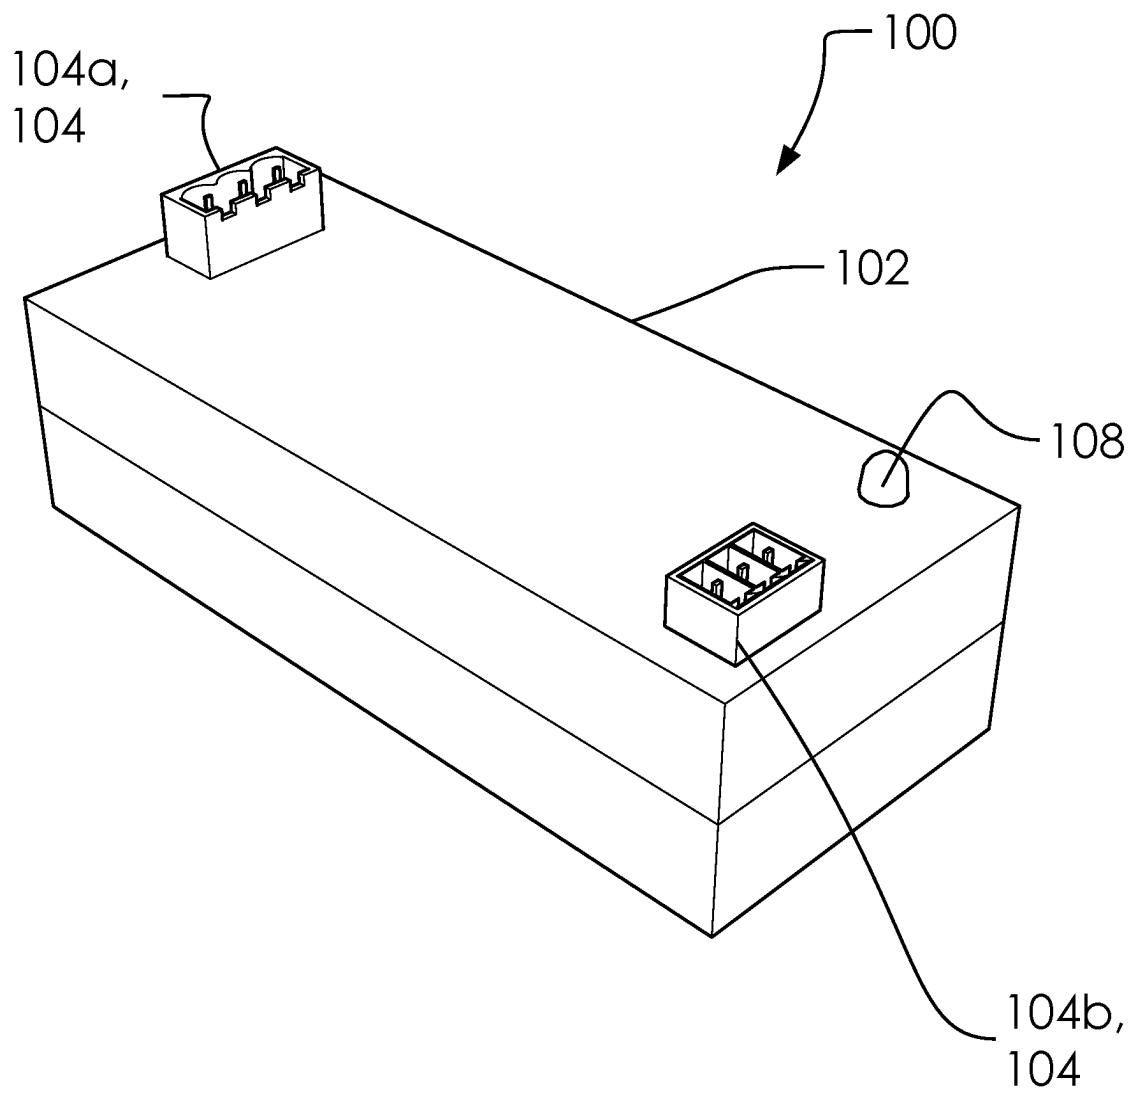


FIG. 1

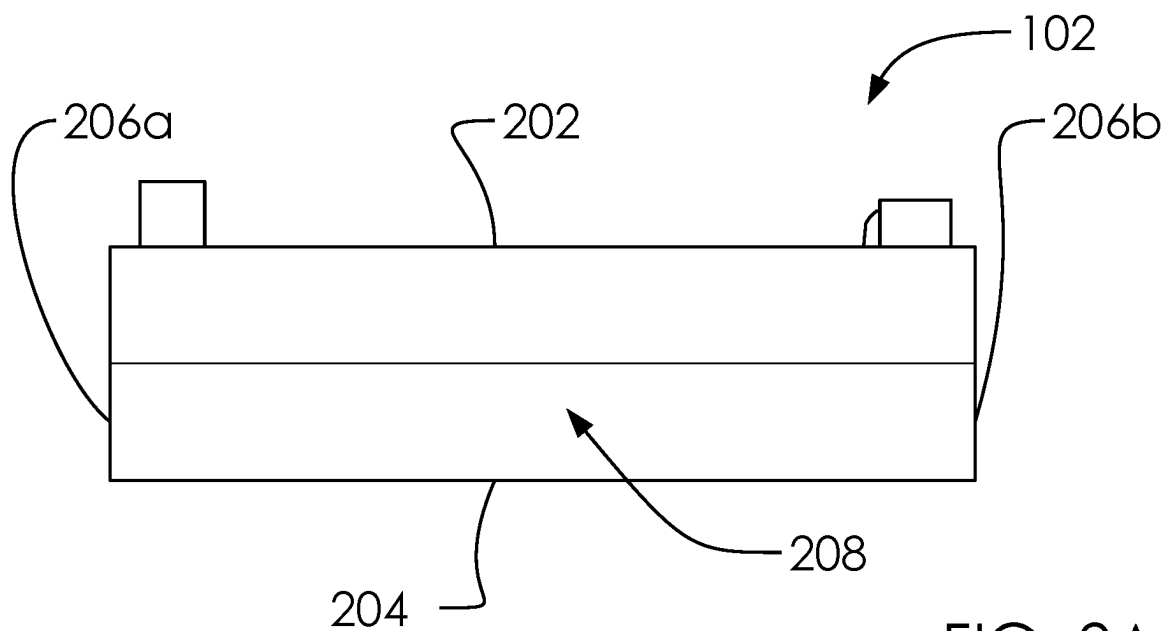


FIG. 2A

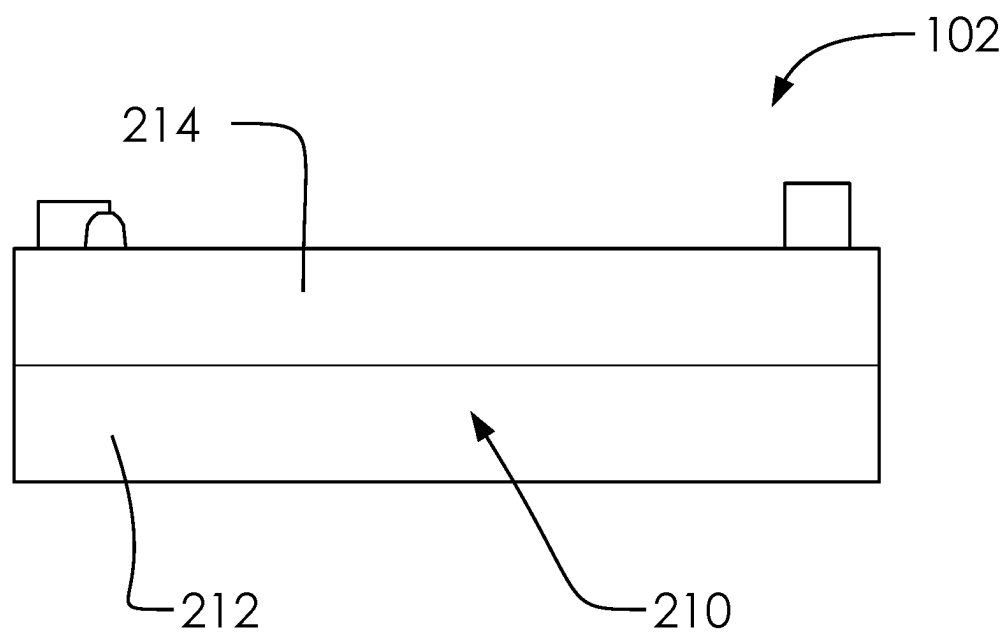


FIG. 2B

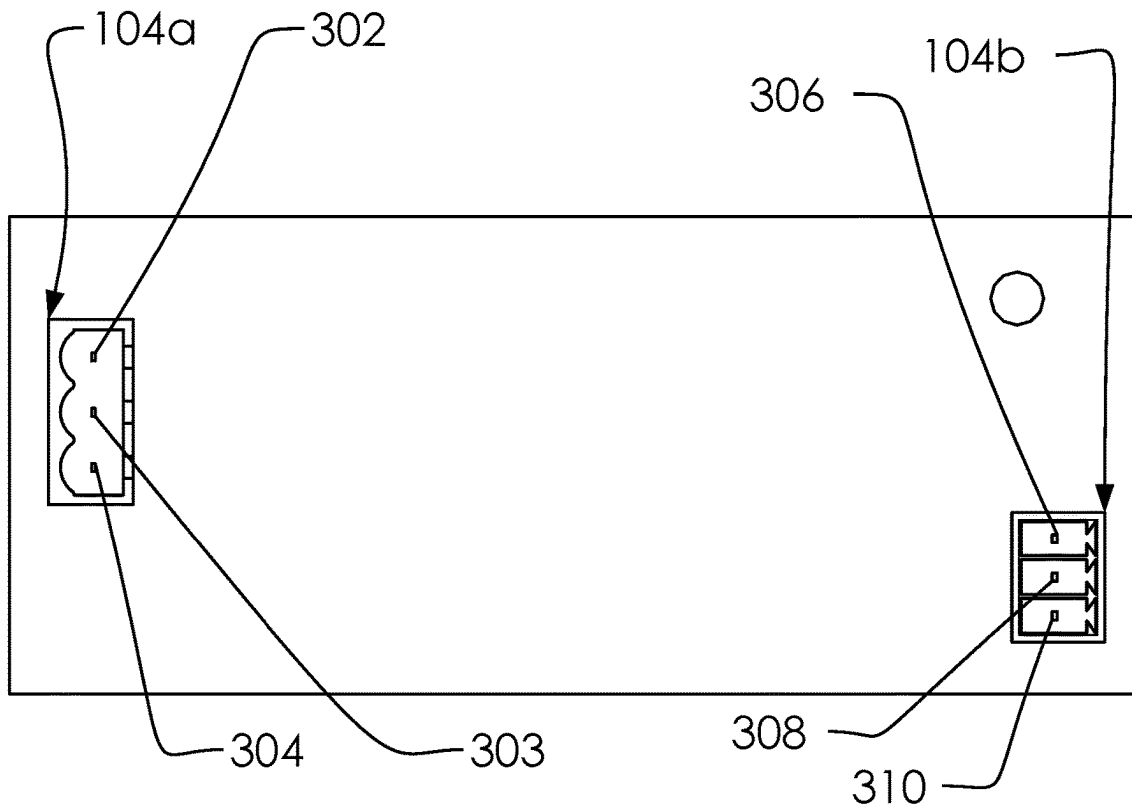


FIG. 3A

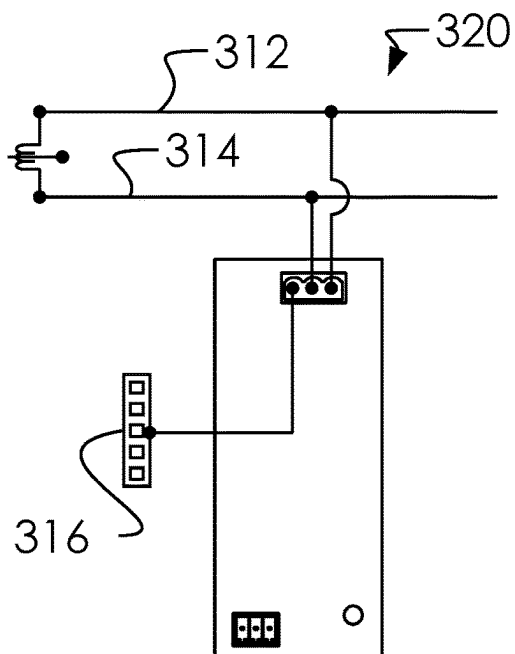


FIG. 3B

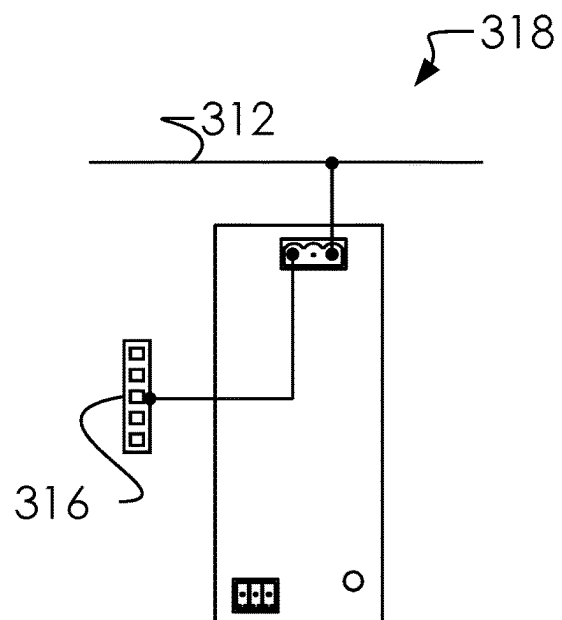


FIG. 3C

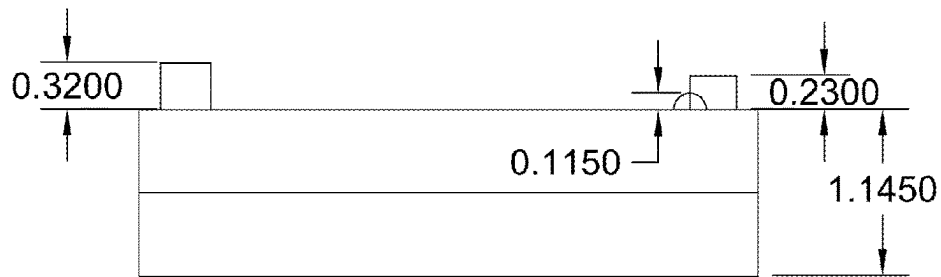


FIG. 4A

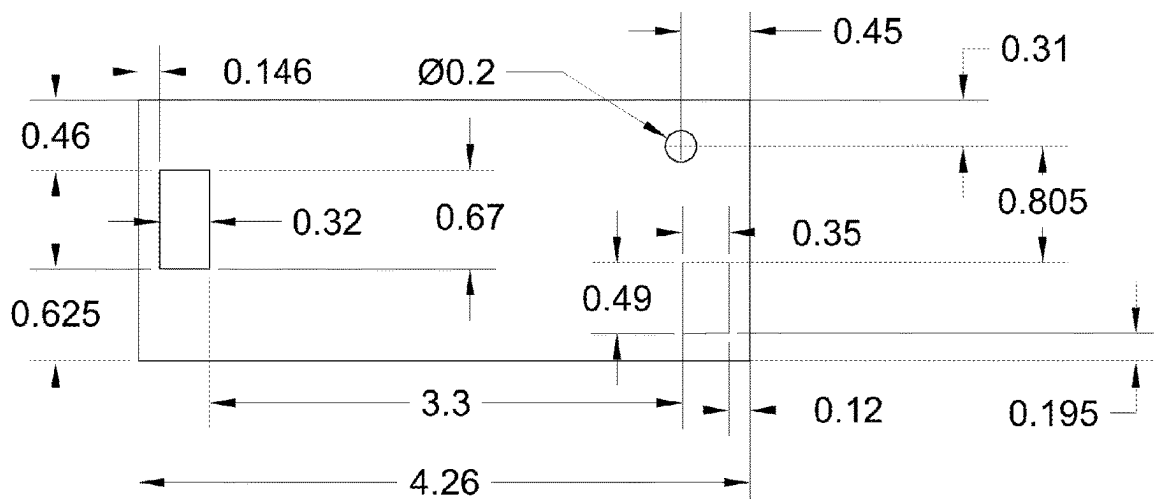


FIG. 4B

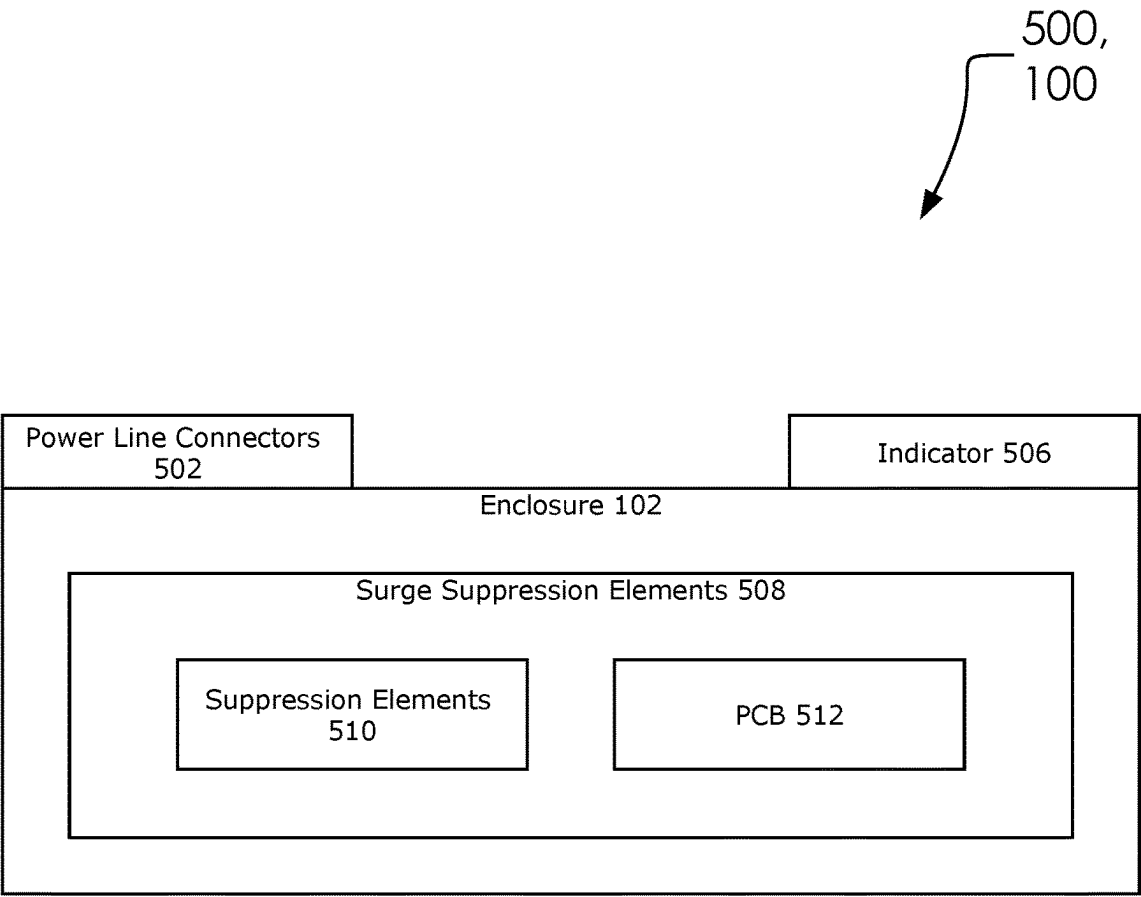


FIG. 5

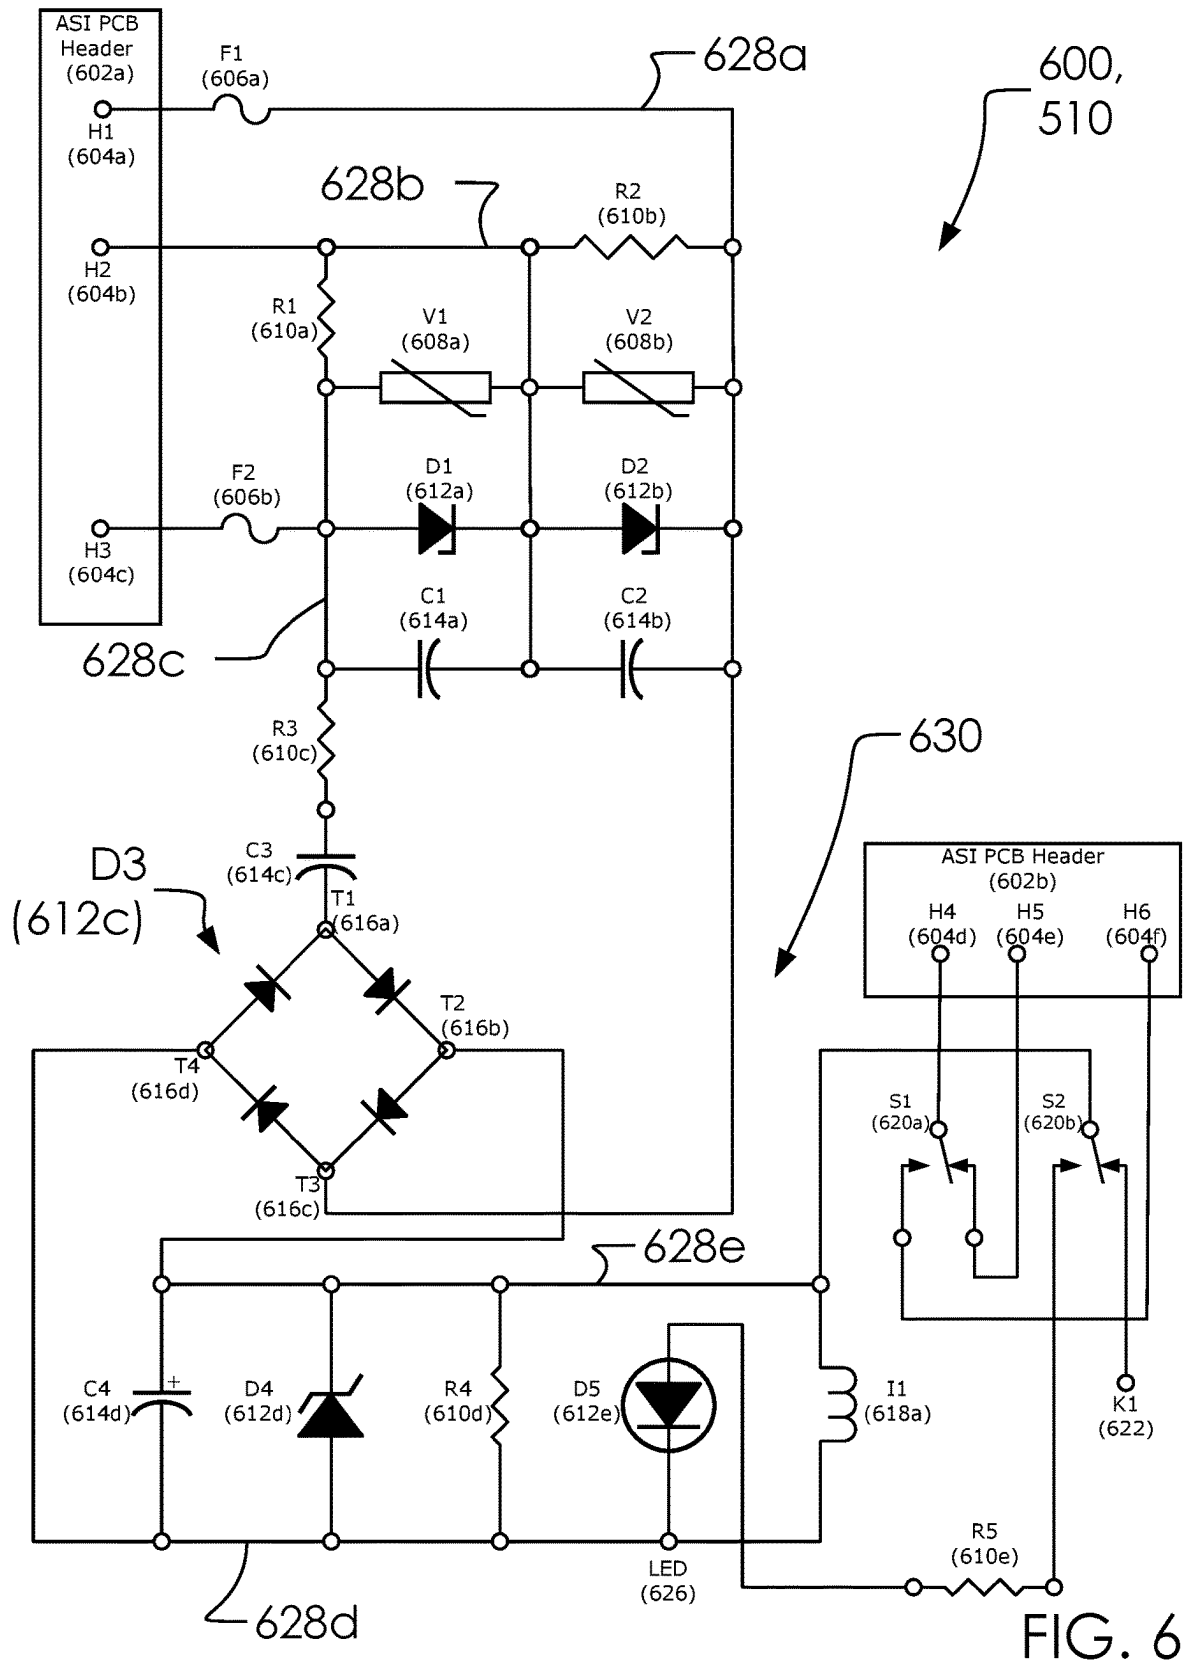


FIG. 6

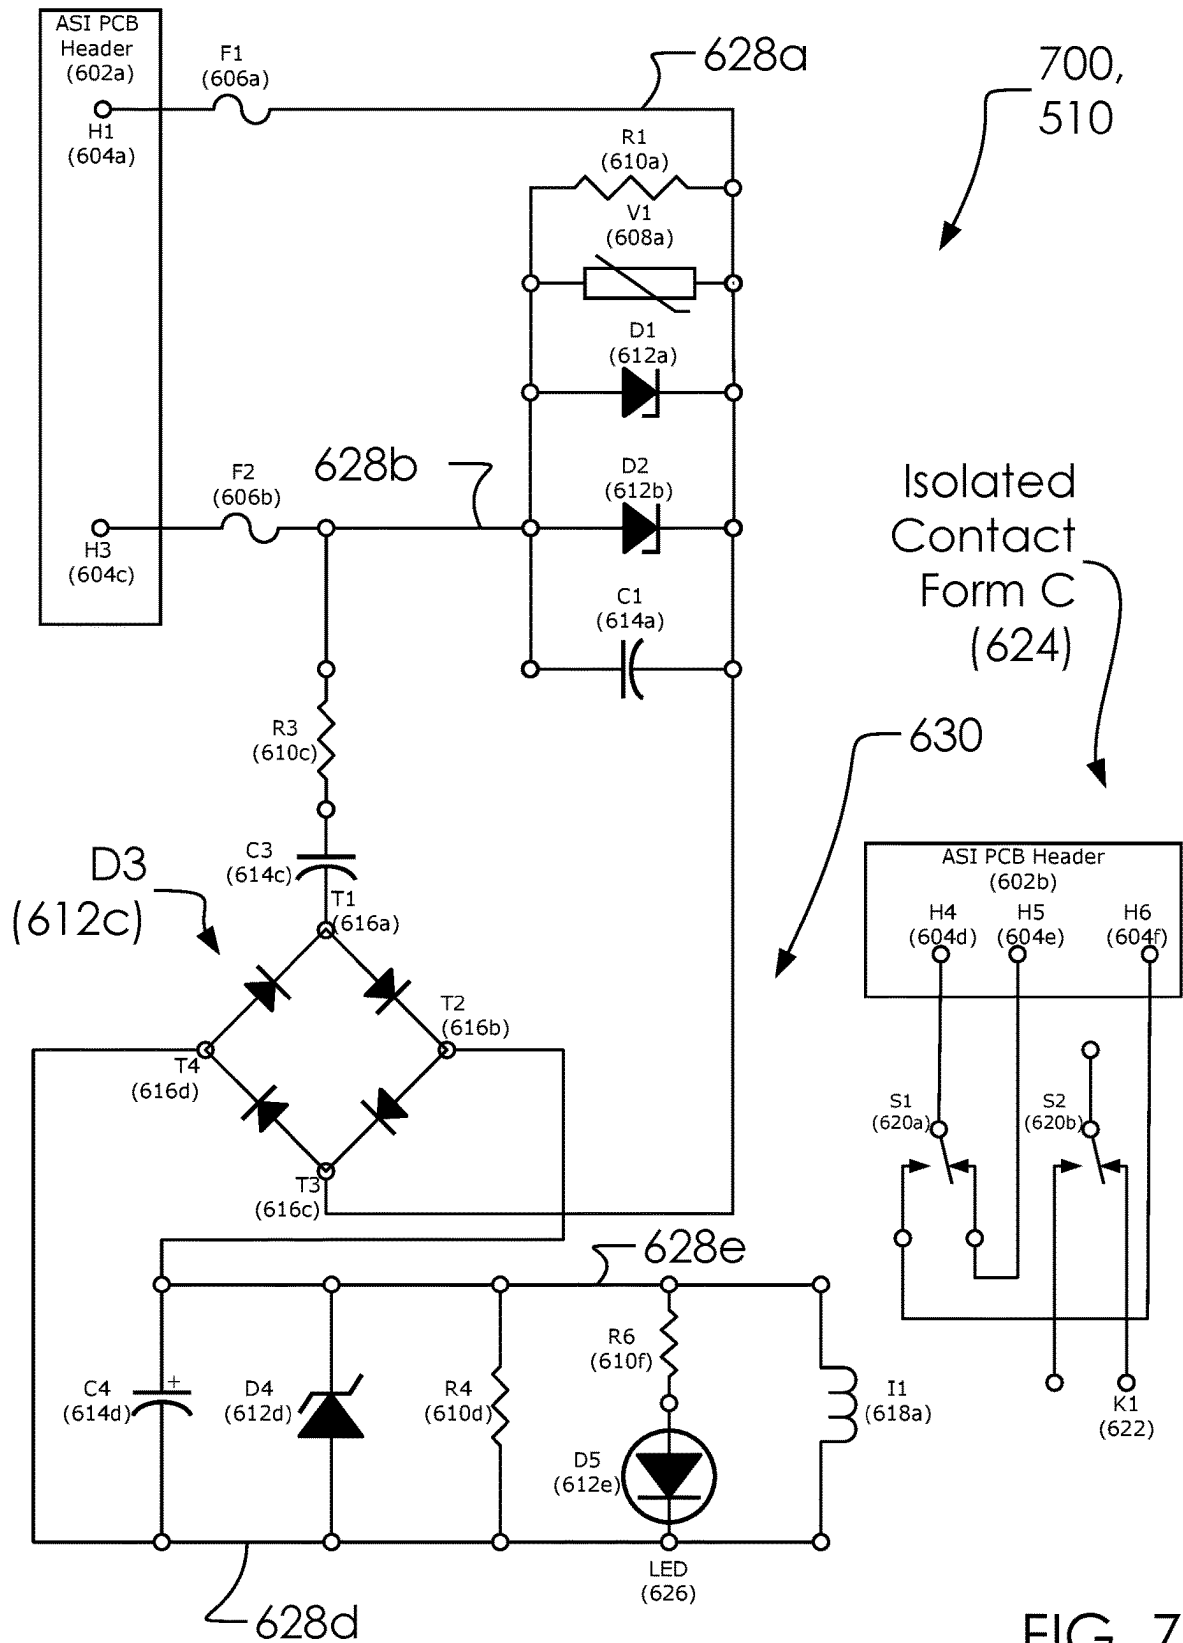


FIG. 7

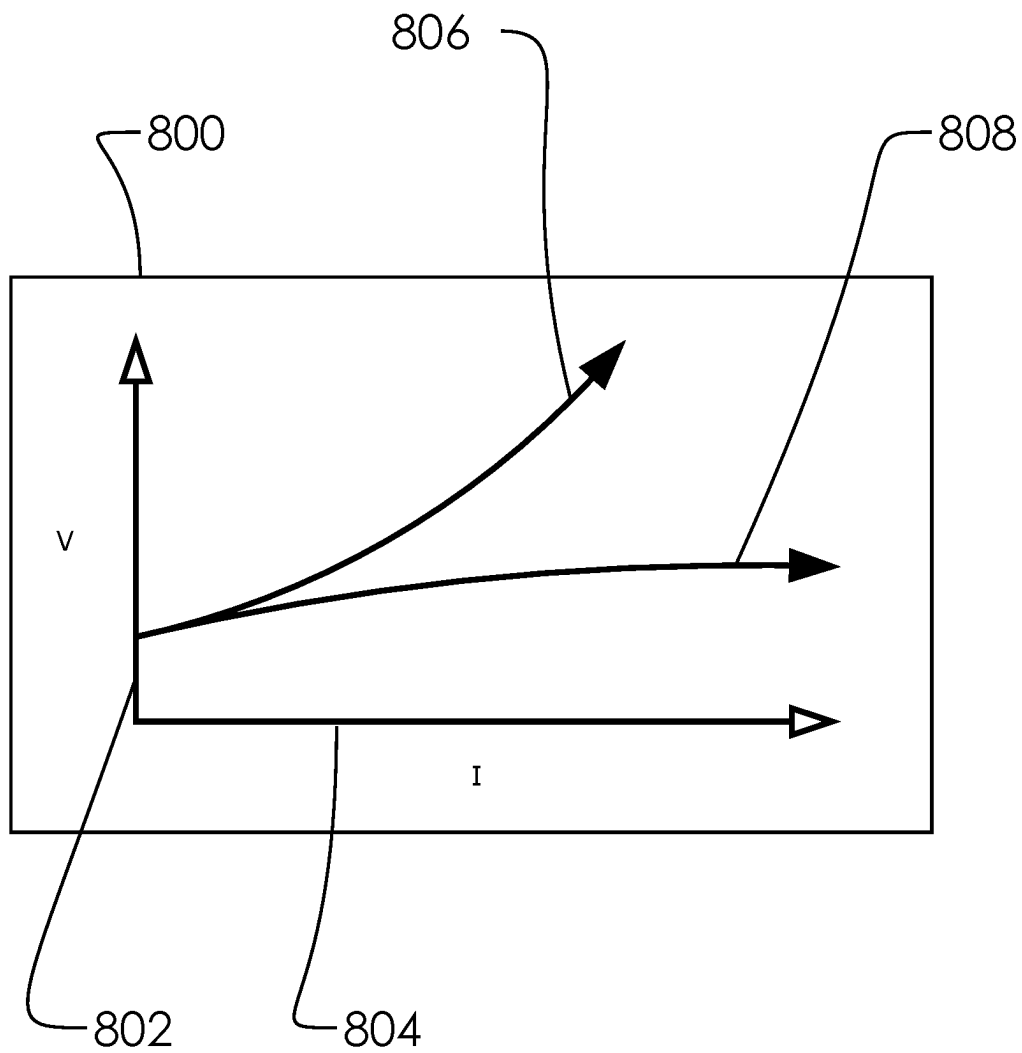


FIG. 8

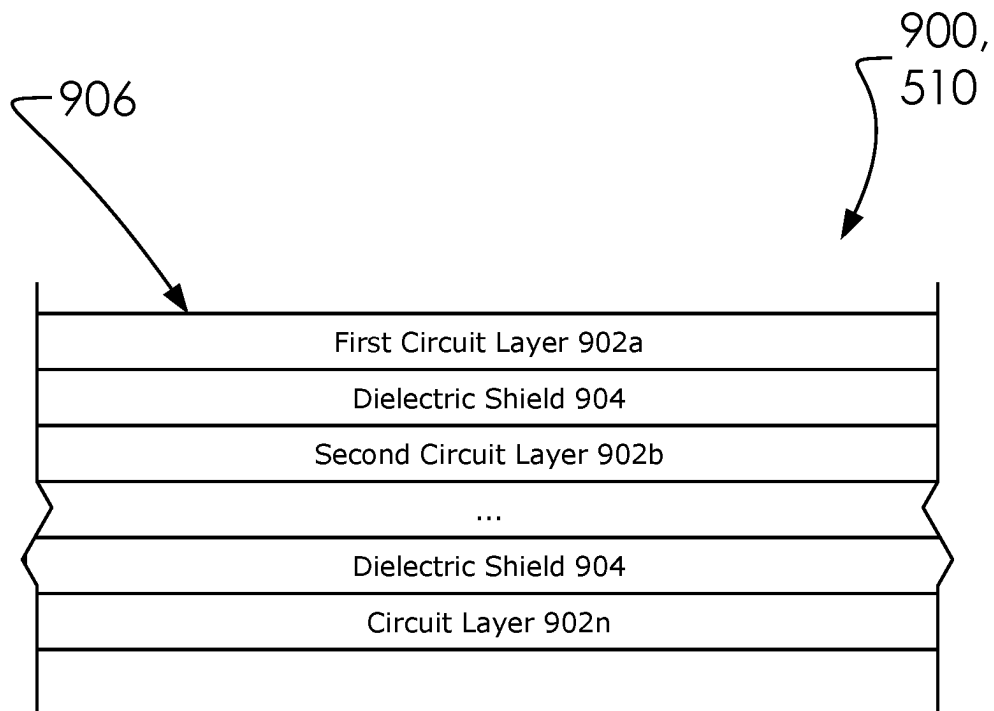


FIG. 9

1

**ADAPTER SYSTEM FOR IC AND
TRANSIENT VOLTAGE CIRCUIT****CROSS-REFERENCE TO RELATED
APPLICATIONS**

This application claims benefit to US Patent Application
Nos. 62/445,139 filed on Jan. 11, 2017.

**STATEMENT REGARDING FEDERALLY
SPONSORED RESEARCH OR DEVELOPMENT
(IF APPLICABLE)**

Not applicable.

**REFERENCE TO SEQUENCE LISTING, A
TABLE, OR A COMPUTER PROGRAM LISTING
COMPACT DISC APPENDIX (IF APPLICABLE)**

Not applicable.

BACKGROUND OF THE INVENTION

No prior art is known to the Applicant

None of the known inventions and patents, taken either
singularly or in combination, is seen to describe the instant
disclosure as claimed.

BRIEF SUMMARY OF THE INVENTION

An adapter system for protection of electronics from
voltage spikes induced on connected wires. Said adapter
system comprises an enclosure, a power line connectors and
a suppression elements. A plug sockets comprise at least a
first line socket and a neutral socket. Said first line socket
connects to a first line. Said neutral socket connects to a
neutral. Said adapter system is configured to connect to at
least said first line with said power line connectors and
suppressing a portion of a power on said first line with said
suppression elements.

An adapter system for protection of electronics from
voltage spikes induced on connected wires. Said adapter
system comprises an enclosure, a power line connectors and
a suppression elements. A plug sockets comprise at least a
first line socket and a neutral socket. Said first line socket
connects to a first line. Said neutral socket connects to a
neutral. Said adapter system is configured to connect to at
least said first line with said power line connectors and
suppressing a portion of a power on said first line with said
suppression elements. Said suppression elements comprises
one or more PCB headers each having one or more header
connectors, one or more fuses, one or more varistors, one or
more resistors, one or more diodes, one or more capacitors,
an inductor, one or more switches, a K1, one or more buses.
A portion of said suppression elements comprise a monitor-
ing circuit. Said monitoring circuit is protected from other
portions of said suppression elements with a diode bridge.
Said one or more PCB headers comprise a first PCB header.
Said first PCB header comprises a first header connector, a
second header connector, and a third header connector. Said
first PCB header comprises a first fuse between to said first
header connector and a first suppression bus. The following
components are arranged in parallel between a second
suppression bus and a third suppression bus: a second
resistor, a second varistor, a second diode and a second
capacitor. The following components are arranged in paral-
lel between said third suppression bus and said second

2

suppression bus: a first resistor, a first varistor, a first diode
and a first capacitor. Said second header connector attaches
directly to said second suppression bus. A second fuse
connects between said third header connector and said third
suppression bus. The following components are arranged in
series between said third suppression bus and a first terminal
of a diode bridge: a third resistor and a third capacitor. A
second terminal connects to a second monitoring bus. A
fourth terminal connects to a first monitoring bus. A third
terminal connects to said first suppression bus. The follow-
ing components are arranged in parallel between said second
monitoring bus and said first monitoring bus: a fourth
capacitor, a fourth diode, a fourth resistor and said inductor.
A fourth header connector 604d connects to the output of a
first switch. A sixth header connector and a fifth header
connector connect to the inputs of said first switch. An
output of a second switch is connected to said second
monitoring bus. The following components can be arranged
in series between said first monitoring bus and a first input
of said second switch: a fifth diode and a fifth resistor. Said
K1 is attached to the second input of said second switch.

An adapter system for protection of electronics from
voltage spikes induced on connected wires. Said adapter
system comprises an enclosure, a power line connectors and
a suppression elements. A plug sockets comprise at least a
first line socket and a neutral socket. Said first line socket
connects to a first line. Said neutral socket connects to a
neutral. Said adapter system is configured to connect to at
least said first line with said power line connectors and
suppressing a portion of a power on said first line with said
suppression elements. Said suppression elements comprises
one or more PCB headers each having one or more header
connectors, one or more fuses, one or more varistors, one or
more resistors, one or more diodes, one or more capacitors,
an inductor, one or more switches, a K1, isolated form C
contacts and one or more buses. Said one or more buses
comprise a first suppression bus, a second suppression bus,
a third suppression bus, and a first monitoring bus. A portion
of said suppression elements comprise a monitoring circuit.
Said monitoring circuit is protected from other portions of
said suppression elements with a diode bridge. Said one or
more PCB headers comprise a first PCB header and a second
PCB header. Said first PCB header comprises a first header
connector, and a third header connector. A first fuse attaches
between to said first header connector and said first sup-
pression bus. The following components are arranged in
parallel between said second suppression bus and said first
suppression bus: a first resistor, a first varistor, a first diode,
a second diode and a first capacitor. A second fuse connects
between said third header connector and said second sup-
pression bus. Said one or more diodes comprise a diode
bridge. Said diode bridge comprises a diode bridge com-
prising a first terminal, a second terminal, a third terminal,
and a fourth terminal. Said diode bridge is arranged between
a portion of said suppression elements and a monitoring
circuit protection configuration to protect monitoring com-
ponents within said suppression elements. The following
components are arranged in series between said second
suppression bus and said first terminal of said diode bridge:
a third resistor and a third capacitor. Said second terminal
connects to a second monitoring bus. Said fourth terminal
connects to said first monitoring bus. Said third terminal
connects to said first suppression bus. The following com-
ponents are arranged in parallel between said second moni-
toring bus and said first monitoring bus: a fourth capacitor,
a fourth diode, a fourth resistor, said inductor and the
combination of a sixth resistor and a fifth diode in series.

Said isolated form C contacts comprise said second PCB header with a first switch and a second switch. Said second PCB header comprises a fourth header connector, a fifth header connector and a sixth header connector. Said fourth header connector connects to the output of said first switch. Said sixth header connector and said fifth header connector connect to the inputs of said first switch. An output of said second switch is connected to said second monitoring bus. Said K1 is attached to the second input of said second switch. Said one or more varistors comprise zinc-oxide nonlinear resistors.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

FIG. 1 illustrates a perspective overview of adapter system 100.

FIG. 2A illustrates elevated first side view of adapter system 100.

FIG. 2B illustrates elevated second side view of adapter system 100.

FIG. 3A illustrates elevated top view of adapter system 100.

FIG. 3B illustrates an elevated top side view of adapter system 100 in a multi-phase configuration 320.

FIG. 3C illustrates an elevated top side view of adapter system 100 in a single phase configuration 318.

FIG. 4A illustrates elevated side view of adapter system 100.

FIG. 4B illustrates elevated top view of adapter system 100.

FIG. 5 illustrates block diagram 500.

FIG. 6 illustrates first schematic 600 of suppression elements 510.

FIG. 7 illustrates second schematic 700 of suppression elements 510.

FIG. 8 illustrates voltage chart 800.

FIG. 9 illustrates layer view 900.

DETAILED DESCRIPTION OF THE INVENTION

The following description is presented to enable any person skilled in the art to make and use the invention as claimed and is provided in the context of the particular examples discussed below, variations of which will be readily apparent to those skilled in the art. In the interest of clarity, not all features of an actual implementation are described in this specification. It will be appreciated that in the development of any such actual implementation (as in any development project), design decisions must be made to achieve the designers' specific goals (e.g., compliance with system- and business-related constraints), and that these goals will vary from one implementation to another. It will also be appreciated that such development effort might be complex and time-consuming, but would nevertheless be a routine undertaking for those of ordinary skill in the field of the appropriate art having the benefit of this disclosure. Accordingly, the claims appended hereto are not intended to be limited by the disclosed embodiments, but are to be accorded their widest scope consistent with the principles and features disclosed herein.

These parts are illustrated in the figures and discussed below:

an adapter system 100

an enclosure 102

a plug sockets 104

a first plug sockets 104a

a second plug sockets 104b

an indicator 108

a top 202

5 a bottom 204

one or more sides 206

a first side 206a

a second side 206b

a front 208

10 a back 210

a bottom portion 212

a top portion 214

a first line socket 302

a second line socket 303

15 a neutral socket 304

a common alarm socket 306

a normally closed alarm socket 308

a normally open alarm socket 310

a first line 312

20 a second line 314

a neutral 316

a single phase configuration 318

a multi-phase configuration 320

a block diagram 500

25 a power line connectors 502

an indicator 506

a surge suppression elements 508

a suppression elements 510

a PCB 512

30 a first schematic 600

one or more PCB headers 602

a first PCB header 602a

a second PCB header 602b

one or more header connectors 604

35 a first header connector 604a

a second header connector 604b

a third header connector 604c

a fourth header connector 604d

a fifth header connector 604e

40 a sixth header connector 604f

one or more fuses 606

a first fuse 606a

a second fuse 606b

one or more varistors 608

45 a first varistor 608a

a second varistor 608b

one or more resistors 610

a first resistor 610a

a second resistor 610b

50 a third resistor 610c

a fourth resistor 610d

a fifth resistor 610e or 610f

one or more diodes 612

a first diode 612a

55 a second diode 612b

a diode bridge 612c

a fourth diode 612d

a fifth diode 612e

one or more capacitors 614

60 a first capacitor 614a

a second capacitor 614b

a third capacitor 614c

a fourth capacitor 614d

one or more terminals 616

65 a first terminal 616a

a second terminal 616b

a third terminal 616c

5

a fourth terminal **616d**
 an inductor **618a**
 one or more switches **620**
 a first switch **620a**
 a second switch **620b**
 a **K1 622**
 isolated form C contacts **624**
 a LED **626**
 one or more buses **628**
 a first suppression bus **628a**
 a second suppression bus **628b**
 a third suppression bus **628c**
 a first monitoring bus **628d**
 a second monitoring bus **628e**
 a monitoring circuit protection configuration **630**
 a second schematic **700**
 a voltage chart **800**
 a voltage axis **802**
 a current axis **804**
 a non-silicon voltage **806**
 a silicon voltage **808**
 a layer view **900**
 one or more layers **902**
 a first layer **902a**
 a second layer **902b**
 a di-electric shield **904**
 a multi-layer circuit board **906**

FIG. 1 illustrates a perspective overview of adapter system **100**.

In one embodiment, said adapter system **100** can comprise said enclosure **102**, said first plug sockets **104a**, said second plug sockets **104b** and said indicator **108**.

In one embodiment, said plug sockets **104** can comprise said first plug sockets **104a** and said second plug sockets **104b**.

In one embodiment, said adapter system **100** can comprise a transient-voltage suppression system for protection of electronics from voltage spikes induced on connected wires.

Said adapter system **100** can comprise a system designed for sensitive individual circuit protection. Said adapter system **100** can comprise in many form factors including a DIN rail mountable 8-pin base which allows for ease of installation and hot-swappable replacement. Also available may be a series or parallel configuration which can safely take equipment offline or allow equipment to continue operating in the event the device becomes expended. Said adapter system **100** can comprise an alarm pin to be utilized for remote monitoring. Said adapter system **100** can comprise a hybrid circuit consisting of only the highest quality components engineered to provide industry best clamping threshold for specific applications. Said adapter system **100** can comprise safety fusing and non-ground dependent design, thereby eliminating safety risks associated with competitive devices.

Said enclosure **102** can comprise a nonconductive, corrosion resistant material.

Said adapter system **100** can comprise a new, smaller, size as compared to prior editions of said adapter system **100** by the Applicant. However, it is distinguished in more than just scale. A much smaller integrated circuit can detect phase loss and report a condition or state based on the detection. The prior art was designed for vectoring to accomplish monitoring.

In one embodiment, indicator **108** can comprise an LED light, as is known in the art. Said indicator **108** can remain green for normal operating conditions.

6

FIG. 2A illustrates elevated first side view of adapter system **100**.

FIG. 2B illustrates elevated second side view of adapter system **100**.

5 In one embodiment, said one or more sides **206** can comprise said first side **206a** and said second side **206b**.

In one embodiment, said adapter system **100** can comprise said top **202**, said bottom **204**, said one or more sides **206**, said first side **206a**, said second side **206b**, said front **208** and said back **210**.

In one embodiment, said enclosure **102** can comprise a shell containing one or more components and can maintain safety of said adapter system **100** in varying environmental conditions.

15 Said enclosure **102** can comprise said bottom portion **212** and said top portion **214** which can be opened, as is known in the art.

In one embodiment, said enclosure **102** can comprise a rectangular shape, but the shape and size of said adapter system **100** may vary according to design requirements and manufacturing advancement during a service life of the current disclosure.

FIG. 3A illustrates elevated top view of adapter system **100**.

FIG. 3B illustrates an elevated top side view of adapter system **100** in a single phase configuration **318**.

FIG. 3C illustrates an elevated top side view of adapter system **100** in a multi-phase configuration **320**.

20 In one embodiment, said adapter system **100** can comprise said single phase configuration **318** and said multi-phase configuration **320**.

In one embodiment, said first plug sockets **104a** can comprise said first line socket **302**, said second line socket **303** and said neutral socket **304**.

In one embodiment, said second plug sockets **104b** can comprise said common alarm socket **306**, said normally closed alarm socket **308** and said normally open alarm socket **310**.

Said first line socket **302** can comprise to a power line at a variety of voltages. Current configurations include 120/240 VAC (split phase), 120 VAC, 240 VAC, and 277 VAC. Said adapter system **100** would be useful in other industries as well, such as photovoltaic where voltages can reach as high as 1200 VAC. Further, adapter system **100** is suitable for use on 300 VAC power systems, such as those in Europe.

For split phase protection, said second line socket **303** is employed to connect to a second line. In one embodiment, first plug sockets **104a** can be rearranged with neutral socket **304** between first line socket **302** and second line socket **303**.

In one embodiment, said second plug sockets **104b** can communicate a status of said adapter system **100** to other systems, such as monitoring systems, as is known in the art.

Said single phase configuration **318** can comprise split phase with two phases such as 120 VAC and 240 VAC.

FIG. 4A illustrates elevated side view of adapter system **100**.

FIG. 4B illustrates elevated top view of adapter system **100**.

60 Provided herein are a preferred embodiment for said adapter system **100**. Applicant, additionally, claims use of various changes to these dimensions as are entitled to him under USPTO and US laws and regulations.

FIG. 5 illustrates block diagram **500**.

In one embodiment, said surge suppression elements **508** can comprise said suppression elements **510** and said PCB **512**.

In one embodiment, said block diagram **500** can comprise said power line connectors **502**, said indicator **506**, said surge suppression elements **508**, said suppression elements **510** and said PCB **512**.

In one embodiment, said adapter system **100** can comprise said power line connectors **502** and said surge suppression elements **508**.

Said block diagram **500** can comprise a diagram of components in said adapter system **100**.

Said enclosure **102** can protect said surge suppression elements **508** from environmental damage.

Said power line connectors **502** can each comprise parts of a plug having a plurality of pins for passing signals and power into and out of said adapter system **100**. Said indicator **506** can further comprise an LED indicator, such as said indicator **108**.

In one embodiment, said suppression elements **510** can be controlled by said PCB **512**, as illustrated herein.

Said PCB **512** can create safety signals to be sent to said indicator **506** and/or second plug sockets **104b**.

Said power line connectors **502** can be fed into said surge suppression elements **508**, tested and filtered with said suppression elements **510** and said PCB **512** and output through said power line connectors **502**.

Here, said adapter system **100** is well adapted to industries with inconsistent power conditions and expensive equipment, such as heavy industry or HVAC systems. Said adapter system **100** is automated and protects expensive equipment without human intervention. Wherein, if said adapter system **100** fails, equipment can simply shut down rather than have a voltage spike.

Said suppression elements **510** can protect said PCB **512**. Said surge suppression elements **508** can be reverse biased to protect both sides.

Generally, systems with integrated circuits can attract voltage spikes, thus, said suppression elements **510** can protect said PCB **512**, as designed and disclosed.

In one embodiment, said PCB **512** can send a signal through said indicator **506** to a controller which can improve reliability and safety which can lead to a higher ROI.

In one embodiment, said adapter system **100** can comprise a hot-swappable element for panel integration. In one embodiment, it can comprise a wiring harness using headers for plug and play characteristics.

Said adapter system **100** can further comprise redundant suppression, advanced multilayer circuits, ground independent technology, and smart monitoring functionality. Further, said adapter system **100** can comprise a hybrid circuit, voltage suppression, and turnkey phase monitoring, filter, low claiming TVSS, fusing and communication.

FIG. **6** illustrates first schematic **600** of suppression elements **510**.

In one embodiment, said one or more PCB headers **602** can comprise said first PCB header **602a** and said second PCB header **602b**.

In one embodiment, said first PCB header **602a** can comprise said second PCB header **602b** and said one or more header connectors **604**.

In one embodiment, said one or more header connectors **604** can comprise said first header connector **604a**, said second header connector **604b** and said third header connector **604c**.

In one embodiment, said one or more fuses **606** can comprise said first fuse **606a** and said second fuse **606b**.

In one embodiment, said one or more varistors **608** can comprise said first varistor **608a** and said second varistor **608b**.

In one embodiment, said one or more resistors **610** can comprise said first resistor **610a**, said second resistor **610b**, said third resistor **610c**, said fourth resistor **610d**, and said fifth resistor **610e**.

In one embodiment, said one or more diodes **612** can comprise said first diode **612a**, said second diode **612b**, said diode bridge **612c**, said fourth diode **612d** and said fifth diode **612e**.

In one embodiment, said diode bridge **612c** can comprise said one or more terminals **616**.

In one embodiment, said one or more capacitors **614** can comprise said first capacitor **614a**, said second capacitor **614b**, said third capacitor **614c** and said fourth capacitor **614d**.

In one embodiment, said one or more terminals **616** can comprise said first terminal **616a**, said second terminal **616b**, said third terminal **616c** and said fourth terminal **616d**.

In one embodiment, said one or more switches **620** can comprise said first switch **620a** and said second switch **620b**.

In one embodiment, said one or more buses **628** can comprise said first suppression bus **628a**, said second suppression bus **628b**, said third suppression bus **628c**, said first monitoring bus **628d**, and said second monitoring bus **628e**.

In one embodiment, said suppression elements **510** can comprise said one or more PCB headers **602**, said third header connector **604c**, said one or more fuses **606**, said second fuse **606b**, said one or more varistors **608**, said second varistor **608b**, said one or more resistors **610**, said sixth resistor **610e**, said one or more diodes **612**, said one or more capacitors **614**, said inductor **618a**, said K1 **622**, said isolated form C contacts **624** comprising one or more switches **620**, said LED **626**, said one or more buses **628** and said monitoring circuit protection configuration **630**.

Said suppression elements **510** can comprise a design, as illustrated herein.

Said adapter system **100** can comprise sinewave correction to filter and protect equipment.

In one embodiment, first PCB header **602a** can comprise first fuse **606a** between to first header connector **604a** and first suppression bus **628a**. The following components can be arranged in parallel between second suppression bus **628b** and third suppression bus **628c**: second resistor **610b**, second varistor **608b**, second diode **612b** and second capacitor **614b**. The following components can be arranged in parallel between third suppression bus **628c** and second suppression bus **628b**: first resistor **610a**, first varistor **608a**, first diode **612a** and first capacitor **614a**. Said second header connector **604b** can attach directly to second suppression bus **628b**. Said second fuse **606b** can connect between third header connector **604c** and third suppression bus **628c**. These components can be arranged in series between third suppression bus **628c** and first terminal **616a** of diode bridge **612c**: third resistor **610c** and third capacitor **614c**. Said second terminal **616b** can connect to second monitoring bus **628e**. Said fourth terminal **616d** can connect to first monitoring bus **628d**. Said third terminal **616c** can connect to said first suppression bus **628a**.

The following components can be arranged in parallel between second monitoring bus **628e** and first monitoring bus **628d**: fourth capacitor **614d**, fourth diode **612d**, fourth resistor **610d** and inductor **618a**.

Said fourth header connector **604d** can connect to the output of first switch **620a**. Said sixth header connector **604f** and said fifth header connector **604e** can connect to the inputs of said first switch **620a**.

An output of second switch **620b** can be connected to said second monitoring bus **628e**. The following components can

be arranged in series between said first monitoring bus **628d** and a first input of said second switch **620b**: fifth diode **612e** and fifth resistor **610e**. Said **K1 622** can be attached to the second input of second switch **620b**.

FIG. 7 illustrates second schematic **700** of suppression elements **510**.

Said suppression elements **510** can comprise a design, as illustrated herein.

One advantage of said adapter system **100** can comprise a limitation of phase loss.

In one embodiment, said suppression elements **510** can be ground independent which increases resistance to lightning risk.

In one embodiment, said adapter system **100** can use varistors such as a zinc-oxide nonlinear resistor.

Said suppression elements **510** can comprise a means of protecting equipment during a phase loss. For example, with 3 phase input at said power line connectors **502** and a phase is lost, said adapter system **100** can cause a shut down of equipment rather than having it become damaged.

As illustrated, said second schematic **700** can comprise a configuration of said suppression elements **510** with said isolated form C contacts **624**, as discussed to follow.

In one embodiment, first PCB header **602a** can comprise first fuse **606a** between to first header connector **604a** and first suppression bus **628a**. The following components can be arranged in parallel between second suppression bus **628b** and first suppression bus **628a**: first resistor **610a**, first varistor **608a**, first diode **612a**, second diode **612b** and first capacitor **614a**.

Said second fuse **606b** can connect between third header connector **604c** and second suppression bus **628b**. These components can be arranged in series between second suppression bus **628b** and first terminal **616a** of diode bridge **612c**: third resistor **610c** and third capacitor **614c**. Said second terminal **616b** can connect to second monitoring bus **628e**. Said fourth terminal **616d** can connect to first monitoring bus **628d**. Said third terminal **616c** can connect to said first suppression bus **628a**.

The following components can be arranged in parallel between second monitoring bus **628e** and first monitoring bus **628d**: fourth capacitor **614d**, fourth diode **612d**, fourth resistor **610d**, inductor **618a** and the combination of said sixth resistor **610f** and fifth diode **612e** in series.

Said isolated contact form C **624** can comprise said second PCB header **602b**, first switch **620a** and second switch **620b** isolated from said second monitoring bus **628e** and first monitoring bus **628d**. Wherein, said fourth header connector **604d** can connect to the output of first switch **620a**. Said sixth header connector **604f** and said fifth header connector **604e** can connect to the inputs of said first switch **620a**.

Said **K1 622** can be attached to the second input of second switch **620b**.

FIG. 8 illustrates voltage chart **800**.

In one embodiment, said voltage chart **800** can comprise said voltage axis **802**, said current axis **804**, said non-silicon voltage **806** and said silicon voltage **808**.

Said voltage chart **800** can comprise a comparison of said non-silicon voltage **806** and said silicon voltage **808**.

By manufacturing said surge suppression elements **508** with said a fused silicon, said adapter system **100** can be improved to limit spikes in voltage with increased current. As illustrated, silicon keeps voltage flat which can protect equipment and prevent explosions.

Said adapter system **100** can be useful in other industries, such as marine, provided that said enclosure **102** can be

custom produced for each application. For example, each vessel in yacht manufacturing may have a different form-factors for said enclosure **102** but use substantially the same internal components. A 3D printer can be used to custom make said enclosure **102** for each application. Many yachts are 2 phase electricity, which need to be filtered with said adapter system **100**.

FIG. 9 illustrates layer view **900**.

In one embodiment, said one or more layers **902** can comprise said first layer **902a** and said second layer **902b**.

In one embodiment, said adapter system **100** can comprise said multi-layer circuit board **906**.

In one embodiment, said surge suppression elements **508** can comprise said one or more layers **902** and said di-electric shield **904**.

In one embodiment, said suppression elements **510** can comprise said di-electric shield **904** and said di-electric shield **904**.

In one embodiment, said suppression elements **510** can be created with a multilayer circuit, as illustrated. Also known as a 3D circuit board, this design has not been used in this field.

Said di-electric shield **904** is helpful for spacing said one or more layers **902** and shield said di-electric shield **904**.

In one embodiment, adapter system **100** can comprise di-electric shield **904** between first layer **902a** and second layer **902b**; wherein, power components among suppression elements **510** can be embedded into first layer **902a** and neutral or common components among said suppression elements **510** can be located on second layer **902b**.

The following sentences are included for completeness of this disclosure with reference to the claims.

An adapter system **100** for protection of electronics from voltage spikes induced on connected wires. Said adapter system **100** comprises an enclosure **102**, a power line connectors **502** and a suppression elements **510**. A plug sockets **104** comprise at least a first line socket **302** and a neutral socket **304**. Said first line socket **302** connects to a first line **312**. Said neutral socket **304** connects to a neutral **316**. Said adapter system **100** is configured to connect to at least said first line **312** with said power line connectors **502** and suppressing a portion of a power on said first line **312** with said suppression elements **510**.

Said suppression elements **510** comprise one or more PCB headers **602** having one or more header connectors **604**, one or more fuses **606**, one or more varistors **608**, one or more resistors **610**, one or more diodes **612**, one or more capacitors **614**, an inductor **618a**, a **K1 622**, isolated form C contacts **624** comprising one or more switches **620** and one or more buses **628**. Said one or more buses **628** comprise a first suppression bus **628a**, a second suppression bus **628b**, a third suppression bus **628c**, and a first monitoring bus **628d**. A portion of said suppression elements **510** comprise a monitoring circuit. Said monitoring circuit is protected from other portions of said suppression elements **510** with a diode bridge. Said one or more PCB headers **602** comprise a first PCB header **602a** and a second PCB header **602b**. Said first PCB header **602a** comprises a first header connector **604a**, and a third header connector **604c**. A first fuse **606a** attaches between said first header connector **604a** and said first suppression bus **628a**. The following components are arranged in parallel between said second suppression bus **628b** and said first suppression bus **628a**: a first resistor **610a**, a first varistor **608a**, a first diode **612a**, a second diode **612b** and a first capacitor **614a**. A second fuse **606b** connects between said third header connector **604c** and said second suppression bus **628b**. Said one or more diodes **612** com-

11

prise a diode bridge **612c**. Said diode bridge **612c** comprises a first terminal **616a**, a second terminal **616b**, a third terminal **616c**, and a fourth terminal **616d**. Said diode bridge **612c** is arranged between a portion of said suppression elements **510** and a monitoring circuit protection configuration **630** to protect monitoring components within said suppression elements **510**. The following components are arranged in series between said second suppression bus **628b** and said first terminal **616a** of said diode bridge **612c**: a third resistor **610c** and a third capacitor **614c**. Said second terminal **616b** connects to a second monitoring bus **628e**. Said fourth terminal **616d** connects to said first monitoring bus **628d**. Said third terminal **616c** connects to said first suppression bus **628a**. The following components are arranged in parallel between said second monitoring bus **628e** and said first monitoring bus **628d**: a fourth capacitor **614d**, a fourth diode **612d**, a fourth resistor **610d**, said inductor **618a** and the combination of a sixth resistor **610e** and a fifth diode **612e** in series. Said isolated form C contacts **624** comprises said second PCB header **602b** with a first switch **620a** and a second switch **620b**. Said second PCB header **602b** comprises a fourth header connector **604d**, a fifth header connector **604e** and a sixth header connector **604f**. Said fourth header connector **604d** connects to the output of said first switch **620a**. Said sixth header connector **604f** and said fifth header connector **604e** connect to the inputs of said first switch **620a**. An output of said second switch **620b** is connected to said second monitoring bus **628e**. Said K1 **622** is attached to the second input of said second switch **620b**.

Said adapter system **100** comprises a multi-layer circuit board **906** embedded with portions of said suppression elements **510** and a PCB **512**. Said multi-layer circuit board **906** comprises a di-electric shield **904**, a first layer **902a** and a second layer **902b**. Said di-electric shield **904** is configured between said first layer **902a** and said second layer **902b**. Wherein, power components among said suppression elements **510** are embedded into said first layer **902a** and neutral or common components among said suppression elements **510** are located on said second layer **902b**.

Said one or more varistors **608** comprise zinc-oxide nonlinear resistors.

Said adapter system **100** comprises a hot-swappable element for panel integration. Said adapter system **100** comprises a wiring harness using headers for plug and play characteristics.

if said adapter system **100** fails, equipment attached to said adapter system **100** can simply shut down rather than have a voltage spike. Said suppression elements **510** is configured to protect a PCB **512**.

Said adapter system **100** comprises a single phase configuration **318** and a multi-phase configuration **320**. Said single phase configuration **318** comprises said first line **312** attached to a portion of said plug sockets **104** and said neutral socket **304** attached to said neutral **316**. Said multi-phase configuration **320** comprises said first line **312** and a second line **314** each connected to one of said first line socket **302** and a second line socket **303**, said first line **312** and said second line **314** are attached to different sockets from one another, said neutral socket **304** attached to said neutral **316**. Said adapter system **100** is configured to accommodate different phase voltages as between said first line **312** and said second line **314** with said adapter system **100** in said multi-phase configuration **320**.

Said adapter system **100** further comprises an indicator **108** comprising an LED light. Said indicator **108** is configured to indicate a status of said adapter system **100**.

12

Said adapter system **100** comprises safety fusing and non-ground dependent design. Said enclosure **102** comprises a nonconductive, corrosion resistant material.

Said plug sockets **104** further comprise a second plug sockets **104b**. Said second plug sockets **104b** is configured to communicate a status of said adapter system **100** to other systems, such as monitoring systems.

Said second plug sockets **104b** comprise a common alarm socket **306**, a normally closed alarm socket **308** and a normally open alarm socket **310**.

Said enclosure **102** is configured to protect and enclose said suppression elements **510**.

Said enclosure **102** comprises DIN rail mountable 8-pin base.

Said suppression elements **510** comprises one or more PCB headers **602** having one or more header connectors **604**, one or more fuses **606**, one or more varistors **608**, one or more resistors **610**, one or more diodes **612**, one or more capacitors **614**, an inductor **618a**, one or more switches **620**, a K1 **622**, one or more buses **628**. A portion of said suppression elements **510** comprise a monitoring circuit. Said monitoring circuit is protected from other portions of said suppression elements **510** with a diode bridge. Said one or more PCB headers **602** comprise a first PCB header **602a**.

Said first PCB header **602a** comprises a first header connector **604a**, a second header connector **604b**, and a third header connector **604c**. Said first PCB header **602a** comprises a first fuse **606a** between to said first header connector **604a** and a first suppression bus **628a**. The following components are arranged in parallel between a second suppression bus **628b** and a third suppression bus **628c**: a second resistor **610b**, a second varistor **608b**, a second diode **612b** and a second capacitor **614b**. The following components are arranged in parallel between said third suppression bus **628c** and said second suppression bus **628b**: a first resistor **610a**, a first varistor **608a**, a first diode **612a** and a first capacitor **614a**. Said second header connector **604b** attaches directly to said second suppression bus **628b**. A second fuse **606b** connects between said third header connector **604c** and said third suppression bus **628c**. The following components are arranged in series between said third suppression bus **628c** and a first terminal **616a** of a diode bridge **612c**: a third resistor **610c** and a third capacitor **614c**. A second terminal **616b** connects to a second monitoring bus **628e**. A fourth terminal **616d** connects to a first monitoring bus **628d**. A third terminal **616c** connects to said first suppression bus **628a**. The following components are arranged in parallel between said second monitoring bus **628e** and said first monitoring bus **628d**: a fourth capacitor **614d**, a fourth diode **612d**, a fourth resistor **610d** and said inductor **618a**. A fourth header connector **604d** connects to the output of a first switch **620a**. A sixth header connector **604f** and a fifth header connector **604e** connect to the inputs of said first switch **620a**. An output of a second switch **620b** is connected to said second monitoring bus **628e**. The following components can be arranged in series between said first monitoring bus **628d** and a first input of said second switch **620b**: a fifth diode **612e** and a fifth resistor **610e**. Said K1 **622** is attached to the second input of said second switch **620b**.

Said adapter system **100** comprises a multi-layer circuit board **906** embedded with portions of said suppression elements **510** and a PCB **512**. Said multi-layer circuit board **906** comprises a di-electric shield **904**, a first layer **902a** and a second layer **902b**. Said di-electric shield **904** is configured between said first layer **902a** and said second layer **902b**. Wherein, power components among said suppression ele-

ments 510 are embedded into said first layer 902a and neutral or common components among said suppression elements 510 are located on said second layer 902b.

Said one or more varistors 608 comprise zinc-oxide nonlinear resistors.

Said suppression elements 510 are configured for sinewave correction to filter and protect equipment.

Said adapter system 100 further comprises a PCB 512 configured to monitor a status of said power line connectors 502 and to protect said adapter system 100, equipment attached thereto, and to activate an indicator 506.

Said adapter system 100 comprises an enclosure 102, a power line connectors 502 and a suppression elements 510. A plug sockets 104 comprise at least a first line socket 302 and a neutral socket 304. Said first line socket 302 connects to a first line 312. Said neutral socket 304 connects to a neutral 316. Said adapter system 100 is configured to connect to at least said first line 312 with said power line connectors 502 and suppressing a portion of a power on said first line 312 with said suppression elements 510. Said suppression elements 510 comprises one or more PCB headers 602 having one or more header connectors 604, one or more fuses 606, one or more varistors 608, one or more resistors 610, one or more diodes 612, one or more capacitors 614, an inductor 618a, one or more switches 620, a K1 622, one or more buses 628. A portion of said suppression elements 510 comprise a monitoring circuit. Said monitoring circuit is protected from other portions of said suppression elements 510 with a diode bridge. Said one or more PCB headers 602 comprise a first PCB header 602a. Said first PCB header 602a comprises a first header connector 604a, a second header connector 604b, and a third header connector 604c. Said first PCB header 602a comprises a first fuse 606a between to said first header connector 604a and a first suppression bus 628a. The following components are arranged in parallel between a second suppression bus 628b and a third suppression bus 628c: a second resistor 610b, a second varistor 608b, a second diode 612b and a second capacitor 614b. The following components are arranged in parallel between said third suppression bus 628c and said second suppression bus 628b: a first resistor 610a, a first varistor 608a, a first diode 612a and a first capacitor 614a. Said second header connector 604b attaches directly to said second suppression bus 628b. A second fuse 606b connects between said third header connector 604c and said third suppression bus 628c. The following components are arranged in series between said third suppression bus 628c and a first terminal 616a of a diode bridge 612c: a third resistor 610c and a third capacitor 614c. A second terminal 616b connects to a second monitoring bus 628e. A fourth terminal 616d connects to a first monitoring bus 628d. A third terminal 616c connects to said first suppression bus 628a. The following components are arranged in parallel between said second monitoring bus 628e and said first monitoring bus 628d: a fourth capacitor 614d, a fourth diode 612d, a fourth resistor 610d and said inductor 618a. Said fourth header connector 604d connects to the output of a first switch 620a. A sixth header connector 604f and a fifth header connector 604e connect to the inputs of said first switch 620a. An output of a second switch 620b is connected to said second monitoring bus 628e. The following components can be arranged in series between said first monitoring bus 628d and a first input of said second switch 620b: a fifth diode 612e and a fifth resistor 610e. Said K1 622 is attached to the second input of said second switch 620b. An adapter system 100 for protection of electronics from voltage spikes induced on connected wires.

Said adapter system 100 comprises an enclosure 102, a power line connectors 502 and a suppression elements 510. A plug sockets 104 comprise at least a first line socket 302 and a neutral socket 304. Said first line socket 302 connects to a first line 312. Said neutral socket 304 connects to a neutral 316. Said adapter system 100 is configured to connect to at least said first line 312 with said power line connectors 502 and suppressing a portion of a power on said first line 312 with said suppression elements 510. Said suppression elements 510 comprise one or more PCB headers 602 having one or more header connectors 604, one or more fuses 606, one or more varistors 608, one or more resistors 610, one or more diodes 612, one or more capacitors 614, an inductor 618a, a K1 622, isolated contact form C 624 and one or more buses 628. Said one or more buses 628 comprise a first suppression bus 628a, a second suppression bus 628b, a third suppression bus 628c, and a first monitoring bus 628d. A portion of said suppression elements 510 comprise a monitoring circuit. Said monitoring circuit is protected from other portions of said suppression elements 510 with a diode bridge. Said one or more PCB headers 602 comprise a first PCB header 602a and a second PCB header 602b. Said first PCB header 602a comprises a first header connector 604a, and a third header connector 604c. A first fuse 606a attaches between to said first header connector 604a and said first suppression bus 628a. The following components are arranged in parallel between said second suppression bus 628b and said first suppression bus 628a: a first resistor 610a, a first varistor 608a, a first diode 612a, a second diode 612b and a first capacitor 614a. A second fuse 606b connects between said third header connector 604c and said second suppression bus 628b. Said one or more diodes 612 comprise a diode bridge 612c. Said diode bridge 612c comprises a diode bridge comprising a first terminal 616a, a second terminal 616b, a third terminal 616c, and a fourth terminal 616d. Said diode bridge 612c is arranged between a portion of said suppression elements 510 and a monitoring circuit protection configuration 630 to protect monitoring components within said suppression elements 510. The following components are arranged in series between said second suppression bus 628b and said first terminal 616a of said diode bridge 612c: a third resistor 610c and a third capacitor 614c. Said second terminal 616b connects to a second monitoring bus 628e. Said fourth terminal 616d connects to said first monitoring bus 628d. Said third terminal 616c connects to said first suppression bus 628a. The following components are arranged in parallel between said second monitoring bus 628e and said first monitoring bus 628d: a fourth capacitor 614d, a fourth diode 612d, a fourth resistor 610d, said inductor 618a and the combination of a sixth resistor 610f and a fifth diode 612e in series. Said isolated contact form C 624 comprises said second PCB header 602b with a first switch 620a and a second switch 620b. Said second PCB header 602b comprises a fourth header connector 604d, a fifth header connector 604e and a sixth header connector 604f. Said fourth header connector 604d connects to the output of said first switch 620a. Said sixth header connector 604f and said fifth header connector 604e connect to the inputs of said first switch 620a. An output of said second switch 620b is connected to said second monitoring bus 628e. Said K1 622 is attached to the second input of said second switch 620b. Said one or more varistors 608 comprise zinc-oxide nonlinear resistors.

Various changes in the details of the illustrated operational methods are possible without departing from the scope of the following claims. Some embodiments may combine the activities described herein as being separate

15

steps. Similarly, one or more of the described steps may be omitted, depending upon the specific operational environment the method is being implemented in. It is to be understood that the above description is intended to be illustrative, and not restrictive. For example, the above-described embodiments may be used in combination with each other. Many other embodiments will be apparent to those of skill in the art upon reviewing the above description. The scope of the invention should, therefore, be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled. In the appended claims, the terms “including” and “in which” are used as the plain-English equivalents of the respective terms “comprising” and “wherein.”

The invention claimed is:

1. An adapter system for protection of electronics from voltage spikes induced on connected wires, wherein:

said adapter system comprises an enclosure, two or more plug sockets comprising one or more power line connectors and suppression elements;

said two or more plug sockets comprise at least a first line socket and a neutral socket;

said first line socket is configured to connect to a first line comprising a power line;

said neutral socket is configured to connect to a neutral line;

said adapter system is configured to connect to at least said first line with said one or more power line connectors and suppressing a portion of a power on said first line with said suppression elements;

said suppression elements comprise one or more PCB headers each having one or more header connectors, one or more fuses, one or more varistors, one or more resistors, one or more diodes, one or more capacitors, an inductor, isolated form C contacts comprising one or more switches, and one or more buses;

said one or more buses comprise a first suppression bus, and a second suppression bus;

a portion of said suppression elements comprises a monitoring circuit;

said monitoring circuit is protected from other portions of said suppression elements with a diode bridge;

said one or more PCB headers comprise a first PCB header and a second PCB header;

said first PCB header comprises a first header connector, and a third header connector;

a first fuse attaches between said first header connector and said first suppression bus;

the following components are arranged in parallel between said second suppression bus and said first suppression bus: a first resistor, a first varistor, a first diode, a second diode and a first capacitor;

a second fuse connects between said third header connector and said second suppression bus;

said diode bridge comprises a first terminal, a second terminal, a third terminal, and a fourth terminal;

said diode bridge is arranged between a portion of said suppression elements and a monitoring circuit protection configuration to protect monitoring components within said suppression elements;

the following components are arranged in series between said second suppression bus and said first terminal of said diode bridge: a third resistor and a third capacitor;

said one or more buses further comprise a first monitoring bus, and a second monitoring bus;

said second terminal connects to said second monitoring bus;

said second terminal connects to said second monitoring bus;

said second terminal connects to said second monitoring bus;

said second terminal connects to said second monitoring bus;

16

said fourth terminal of said diode bridge connects to said first monitoring bus;

said third terminal of said diode bridge of said diode bridge connects to said first suppression bus;

the following components are arranged in parallel between said first monitoring bus and said second monitoring bus: a fourth capacitor, a fourth diode, a fourth resistor, said inductor and the combination of a sixth resistor and a fifth diode in series;

said isolated form C contacts comprising said second PCB header with a first switch; and

said second PCB header comprises a fourth header connector, a fifth header connector and a sixth header connector;

said fourth header connector connects to the output of said first switch; and

said sixth header connector and said fifth header connector connect to the inputs of said first switch.

2. The adapter system from claim 1, wherein:

said adapter system comprises a multi-layer circuit board embedded with portions of said suppression elements and a PCB;

said multi-layer circuit board comprises a di-electric shield, a first layer and a second layer;

said di-electric shield is configured between said first layer and said second layer; and

wherein,

power components among said suppression elements are embedded into said first layer and

neutral or common components among said suppression elements are located on said second layer.

3. The adapter system from claim 1, wherein:

said one or more varistors comprise zinc-oxide nonlinear resistors.

4. The adapter system from claim 1, wherein:

if said adapter system fails, equipment attached to said adapter system can simply shut down rather than have a voltage spike; and

said suppression elements is configured to protect a PCB.

5. The adapter system from claim 1, wherein:

said adapter system is arranged in a single phase configuration;

said single phase configuration comprises

said first line attached to a portion of said two or more plug sockets and

said neutral socket attached to said neutral.

6. The adapter system from claim 1, wherein:

said adapter system further comprises an indicator comprising an LED light; and

said indicator is configured to indicate a status of said adapter system.

7. The adapter system from claim 1, wherein:

said adapter system comprises safety fusing and non-ground dependent design; and

said enclosure comprises a nonconductive, corrosion resistant material.

8. The adapter system from claim 1, wherein:

said two or more plug sockets further comprise a second two or more plug sockets; and

said second two or more plug sockets is configured to communicate a status of said adapter system to other systems, such as monitoring systems.

9. The adapter system from claim 8, wherein:

said second two or more plug sockets comprise a common alarm socket, a normally closed alarm socket and a normally open alarm socket.

17

10. The adapter system from claim 1, wherein:
said enclosure is configured to protect and enclose said suppression elements.

11. The adapter system from claim 1, wherein:
said suppression elements are configured for sinewave correction to filter and protect equipment. 5

12. The adapter system from claim 1, wherein:
said adapter system further comprises a PCB configured to monitor a status of said one or more power line connectors and to protect said adapter system and equipment attached thereto, and to activate an indicator. 10

13. The adapter system from claim 1, wherein:
said suppression elements wherein said form C contacts further comprise a second switch.

14. An adapter system for protection of electronics from voltage spikes induced on connected wires, wherein: 15
said adapter system comprises an enclosure, two or more plug sockets comprising one or more power line connectors and suppression elements;
said two or more plug sockets comprise at least a first line socket and a neutral socket; 20
said first line socket is configured to connect to a first line comprising a power line;
said neutral socket is configured to connect to a neutral line; 25
said adapter system is configured to connect to at least said first line with said one or more power line connectors and suppressing a portion of a power on said first line with said suppression elements;
said suppression elements comprise one or more PCB headers each having one or more header connectors, one or more fuses, one or more varistors, one or more resistors, one or more diodes, one or more capacitors, an inductor, one or more switches, and one or more buses; 30
a portion of said suppression elements comprises a monitoring circuit;
said monitoring circuit is protected from other portions of said suppression elements with a diode bridge;
said one or more PCB headers comprise a first PCB header; 40
said first PCB header comprises a first header connector, a second header connector, and a third header connector;
said first PCB header comprises a first fuse between said first header connector and a first suppression bus; 45
the following components are arranged in parallel between a second suppression bus and said first suppression bus: a second resistor, a second varistor, a second diode and a second capacitor; 50
the following components are arranged in parallel between a third suppression bus and said second suppression bus: a first resistor, a first varistor, a first diode and a first capacitor;
said second header connector attaches directly to said second suppression bus; 55
a second fuse connects between said third header connector and said third suppression bus;
the following components are arranged in series between said third suppression bus and a first terminal of said diode bridge: a third resistor and a third capacitor; 60
said one or more buses further comprise a first monitoring bus, and a second monitoring bus;
a second terminal of said diode bridge connects to said second monitoring bus; 65
a fourth terminal of said diode bridge connects to said first monitoring bus;

18

a third terminal of said diode bridge connects to said first suppression bus;
the following components are arranged in parallel between said first monitoring bus and said second monitoring bus: a fourth capacitor, a fourth diode, a fourth resistor and said inductor;
said suppression elements further comprises a first switch; a fourth header connector of a second PCB header connects to the output of said first switch; and
a sixth header connector and a fifth header connector of the second PCB header connect to the inputs of said first switch.

15. The adapter system from claim 14, wherein:
an output of a second switch is connected to said second monitoring bus; and
the following components can be arranged in series between said first monitoring bus and a first input of said second switch: a fifth diode and a fifth resistor.

16. An adapter system for protection of electronics from voltage spikes induced on connected wires, wherein:
said adapter system comprises an enclosure, two or more plug sockets comprising one or more power line connectors and suppression elements;
said two or more plug sockets comprise at least a first line socket and a neutral socket;
said first line socket is configured to connect to a first line comprising a power line;
said neutral socket is configured to connect to a neutral line;
said adapter system is configured to connect to at least said first line with said one or more power line connectors and suppressing a portion of a power on said first line with said suppression elements;
said suppression elements comprise one or more PCB headers each having one or more header connectors, one or more fuses, one or more varistors, one or more resistors, one or more diodes, one or more capacitors, an inductor, one or more switches, one or more buses;
a portion of said suppression elements comprises a monitoring circuit;
said monitoring circuit is protected from other portions of said suppression elements with a diode bridge;
said one or more PCB headers comprise a first PCB header;
said first PCB header comprises a first header connector, a second header connector, and a third header connector;
said first PCB header comprises a first fuse between to said first header connector and a first suppression bus;
the following components are arranged in parallel between a second suppression bus and said first suppression bus: a second resistor, a second varistor, a second diode and a second capacitor;
the following components are arranged in parallel between a third suppression bus and said second suppression bus: a first resistor, a first varistor, a first diode and a first capacitor;
said second header connector attaches directly to said second suppression bus;
a second fuse connects between said third header connector and said third suppression bus;
the following components are arranged in series between said third suppression bus and a first terminal of said diode bridge: a third resistor and a third capacitor;
a second terminal of said diode bridge connects to a second monitoring bus;

19

a fourth terminal of said diode bridge connects to a first monitoring bus;
 a third terminal of said diode bridge connects to said first suppression bus;
 the following components are arranged in parallel 5
 between said second monitoring bus and said first monitoring bus: a fourth capacitor, a fourth diode, a fourth resistor and said inductor;
 a fourth header connector of a second PCB header connects to the output of a first switch;
 a sixth header connector and a fifth header connector of 10
 the second PCB header connect to the inputs of said first switch;
 an output of a second switch is connected to said second monitoring bus; and
 the following components can be arranged in series 15
 between said first monitoring bus and a first input of said second switch: a fifth diode and a fifth resistor.

20

17. The adapter system from claim **16**, wherein:
 said adapter system comprises a multi-layer circuit board embedded with portions of said suppression elements and a PCB;
 said multi-layer circuit board comprises a di-electric shield, a first layer and a second layer;
 said di-electric shield is configured between said first layer and said second layer; and
 wherein,
 power components among said suppression elements are embedded into said first layer and
 neutral or common components among said suppression elements are located on said second layer.
18. The adapter system from claim **16**, wherein:
 said one or more varistors comprise zinc-oxide nonlinear resistors.

* * * * *