



US010571223B2

(12) **United States Patent**  
**Kiefer et al.**

(10) **Patent No.:** **US 10,571,223 B2**  
(45) **Date of Patent:** **Feb. 25, 2020**

(54) **SYSTEM AND METHOD FOR DETECTING HIT LOCATIONS USING THE TIME DOMAIN**

1/0393 (2013.01); H05K 2201/041 (2013.01);  
H05K 2201/10151 (2013.01)

(58) **Field of Classification Search**  
CPC ..... H05K 1/144; H05K 1/0393; F41H 11/02  
See application file for complete search history.

(71) Applicant: **Invocon, Inc.**, Conroe, TX (US)

(56) **References Cited**

(72) Inventors: **Karl F. Kiefer**, Conroe, TX (US);  
**Donald Chaffee**, Crestview, FL (US);  
**Douglas Heermann**, Conroe, TX (US);  
**Brian Philpot**, Spring, TX (US)

U.S. PATENT DOCUMENTS

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 168 days.

8,307,694 B1 \* 11/2012 Kiefer ..... G01S 5/06  
73/12.01  
8,316,690 B1 \* 11/2012 Kiefer ..... G01M 7/00  
73/12.01  
2013/0099809 A1 \* 4/2013 Wang ..... G01R 35/005  
324/750.02

(21) Appl. No.: **15/911,052**

\* cited by examiner

(22) Filed: **Mar. 2, 2018**

*Primary Examiner* — Alvaro E Fortich

(65) **Prior Publication Data**

(74) *Attorney, Agent, or Firm* — Shannon L Warren

US 2018/0252499 A1 Sep. 6, 2018

**Related U.S. Application Data**

(57) **ABSTRACT**

(60) Provisional application No. 62/466,336, filed on Mar. 2, 2017.

A time domain detection system to measure and report on hypervelocity impacts HVI between an interceptor vehicle and a target vehicle. Wherein, said time domain detection system comprises a target vehicle components installed on said target vehicle, a one or more panels arranged on a portion of said target vehicle at a potential HVI locations, and a hit detection system wired into said one or more panels. Said target vehicle components comprise at least said hit detection system, and a lines. Said one or more panels are wired into said hit detection system with said lines. Said hit detection system is configured to communicate with said one or more panels over said lines. Said one or more panels can each comprise a one or more detector panel layers, and a two or more insulator layers.


(51) **Int. Cl.**

**F41G 7/00** (2006.01)  
**H05K 1/14** (2006.01)  
**F41H 11/02** (2006.01)  
**F41J 9/08** (2006.01)  
**F41G 7/22** (2006.01)  
**H05K 1/03** (2006.01)

(52) **U.S. Cl.**

CPC ..... **F41G 7/001** (2013.01); **F41G 7/224** (2013.01); **F41H 11/02** (2013.01); **F41J 9/08** (2013.01); **H05K 1/144** (2013.01); **H05K**

**15 Claims, 8 Drawing Sheets**

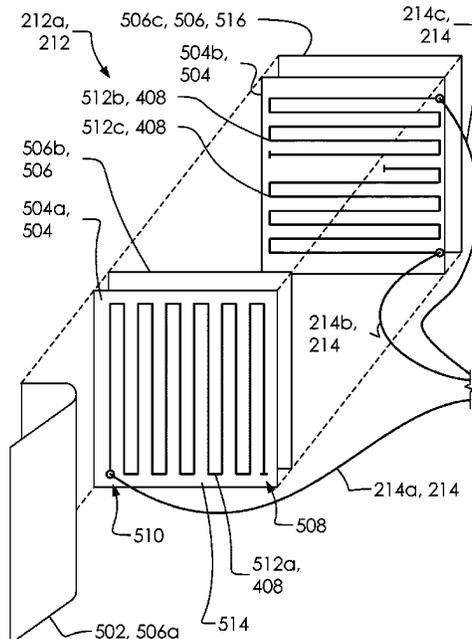

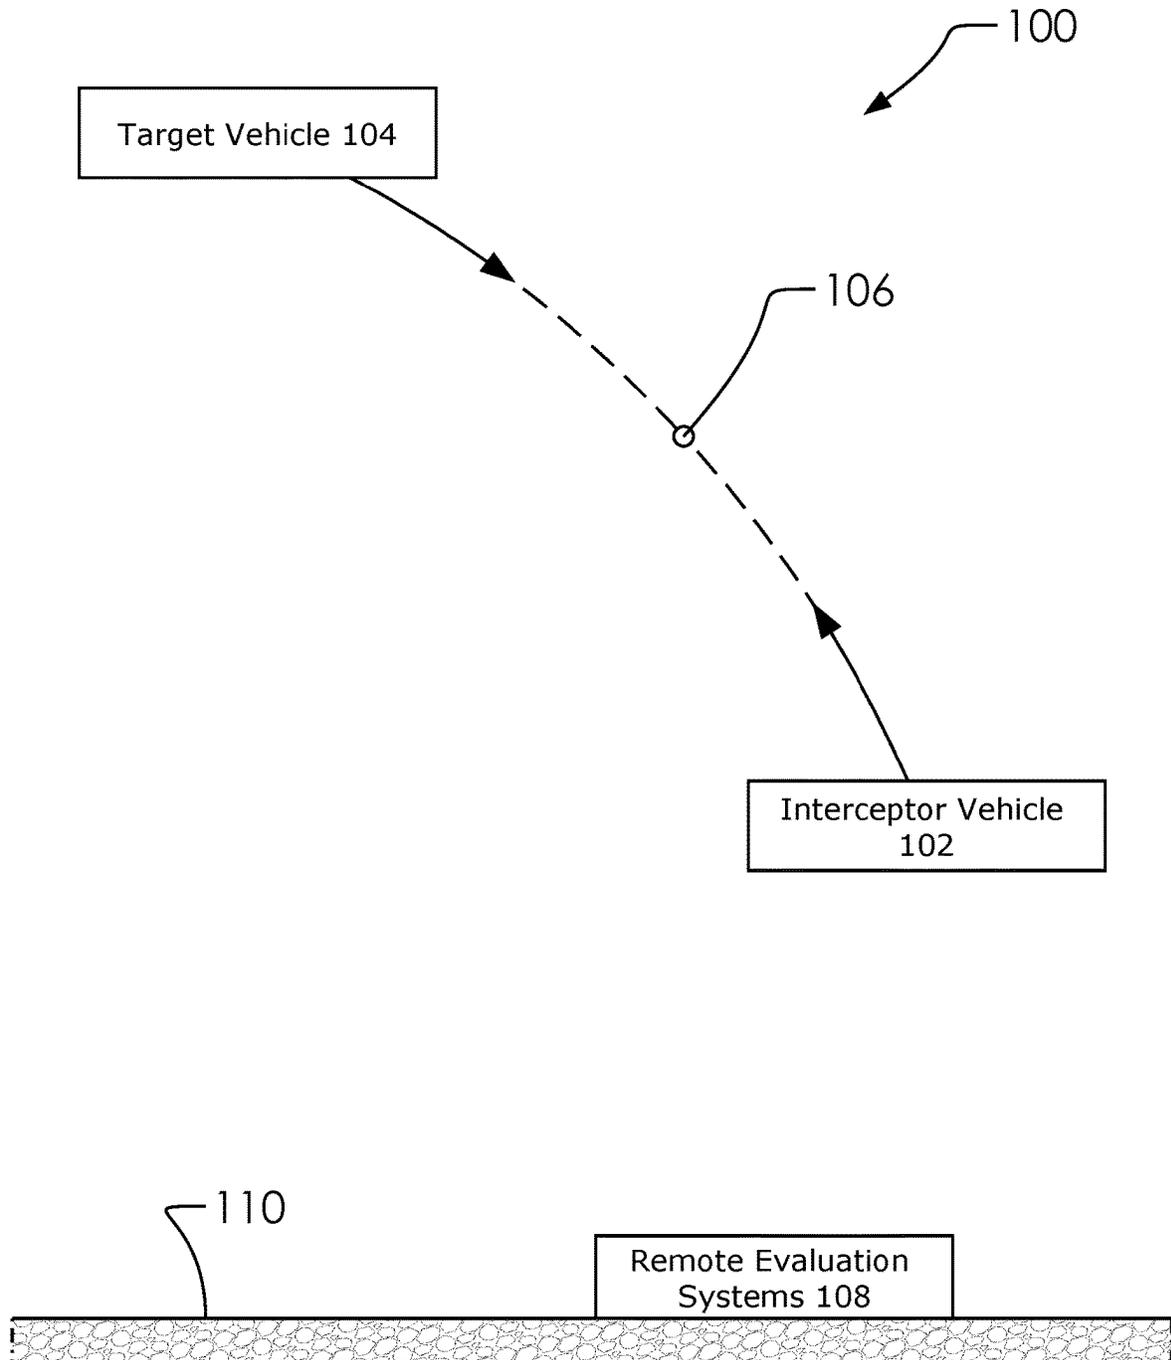


FIG. 1

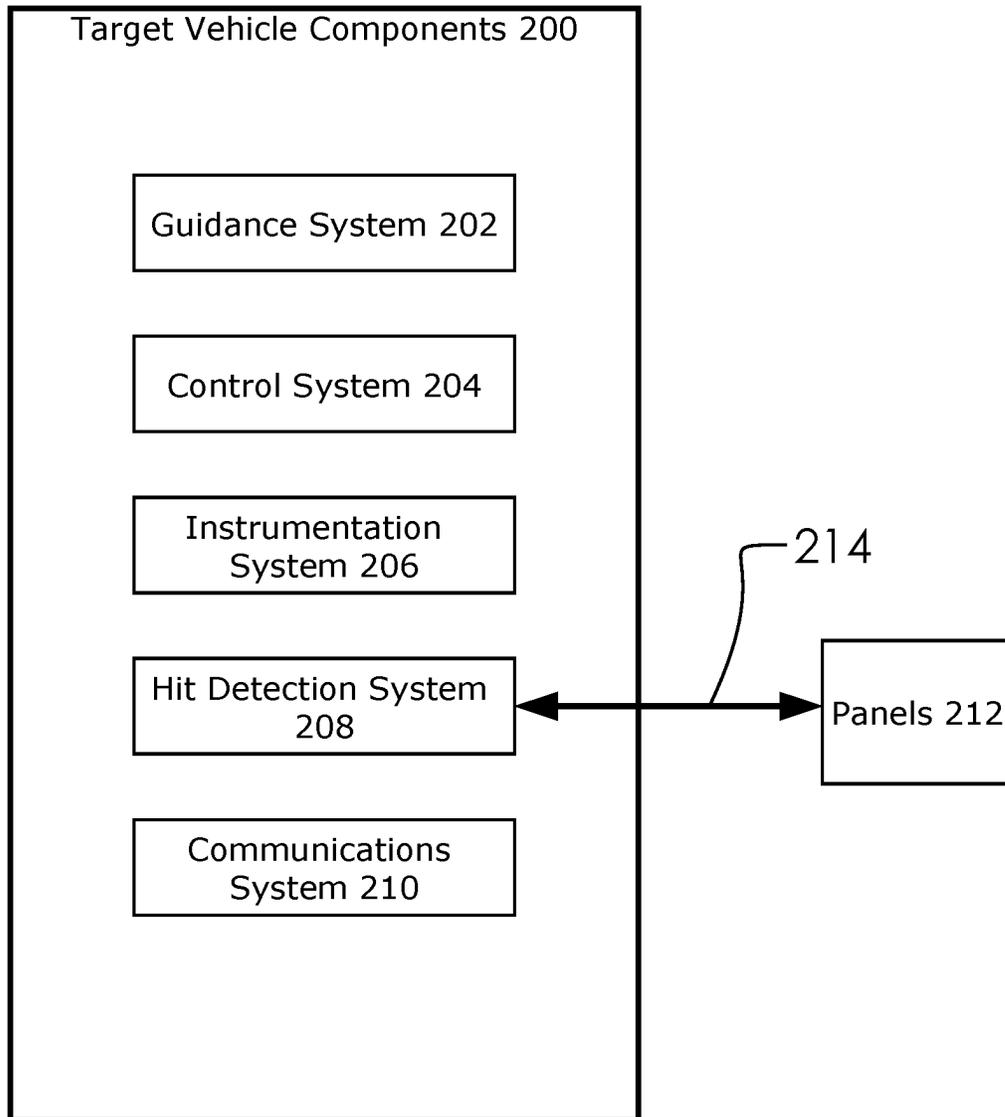


FIG. 2

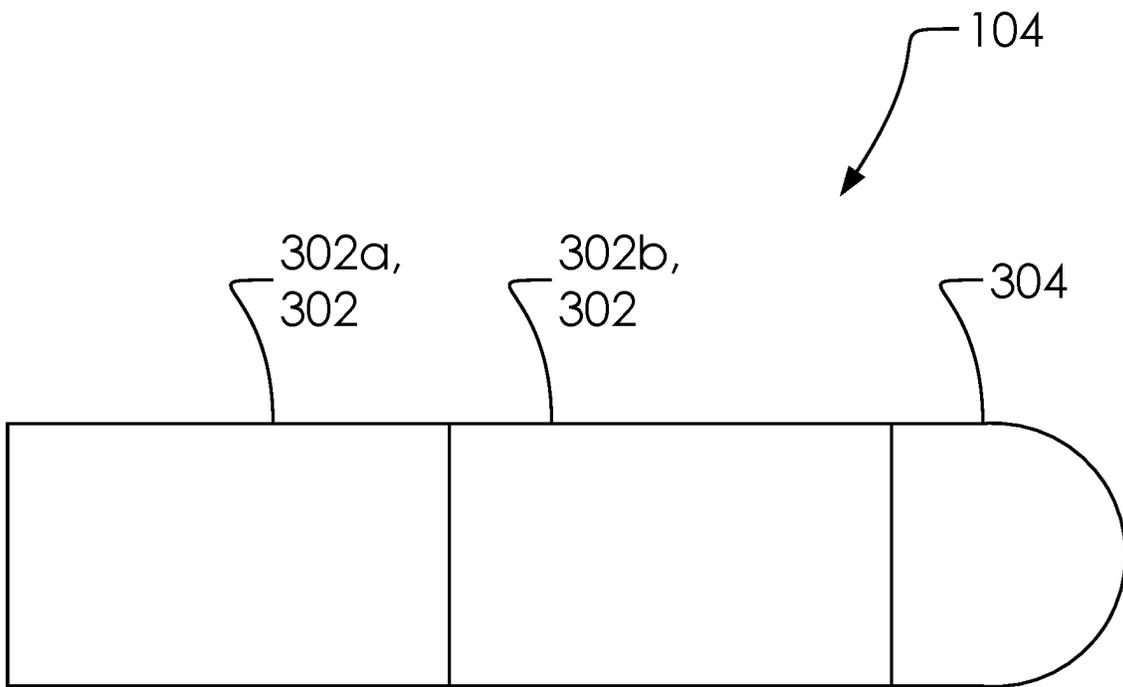


FIG. 3

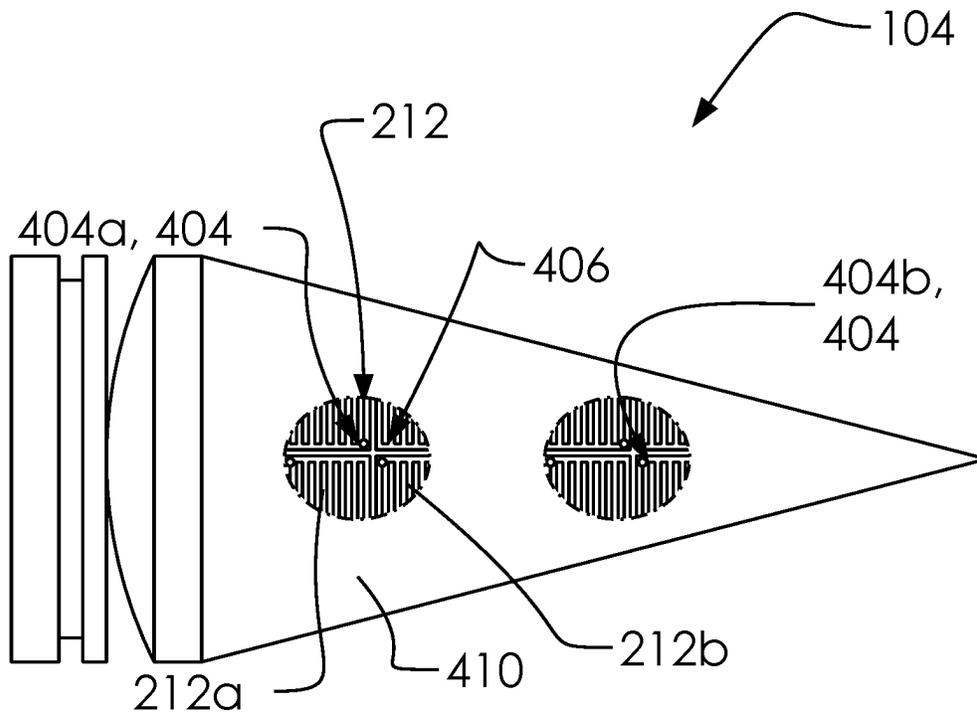


FIG. 4A

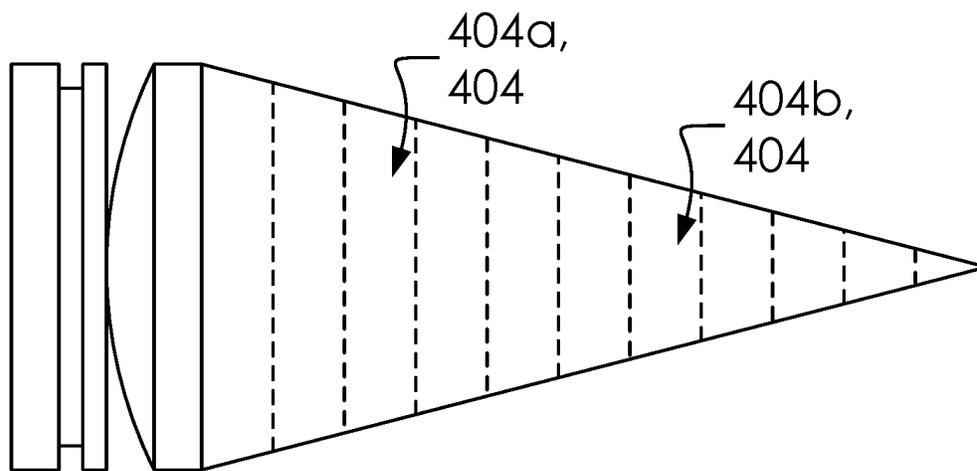


FIG. 4B

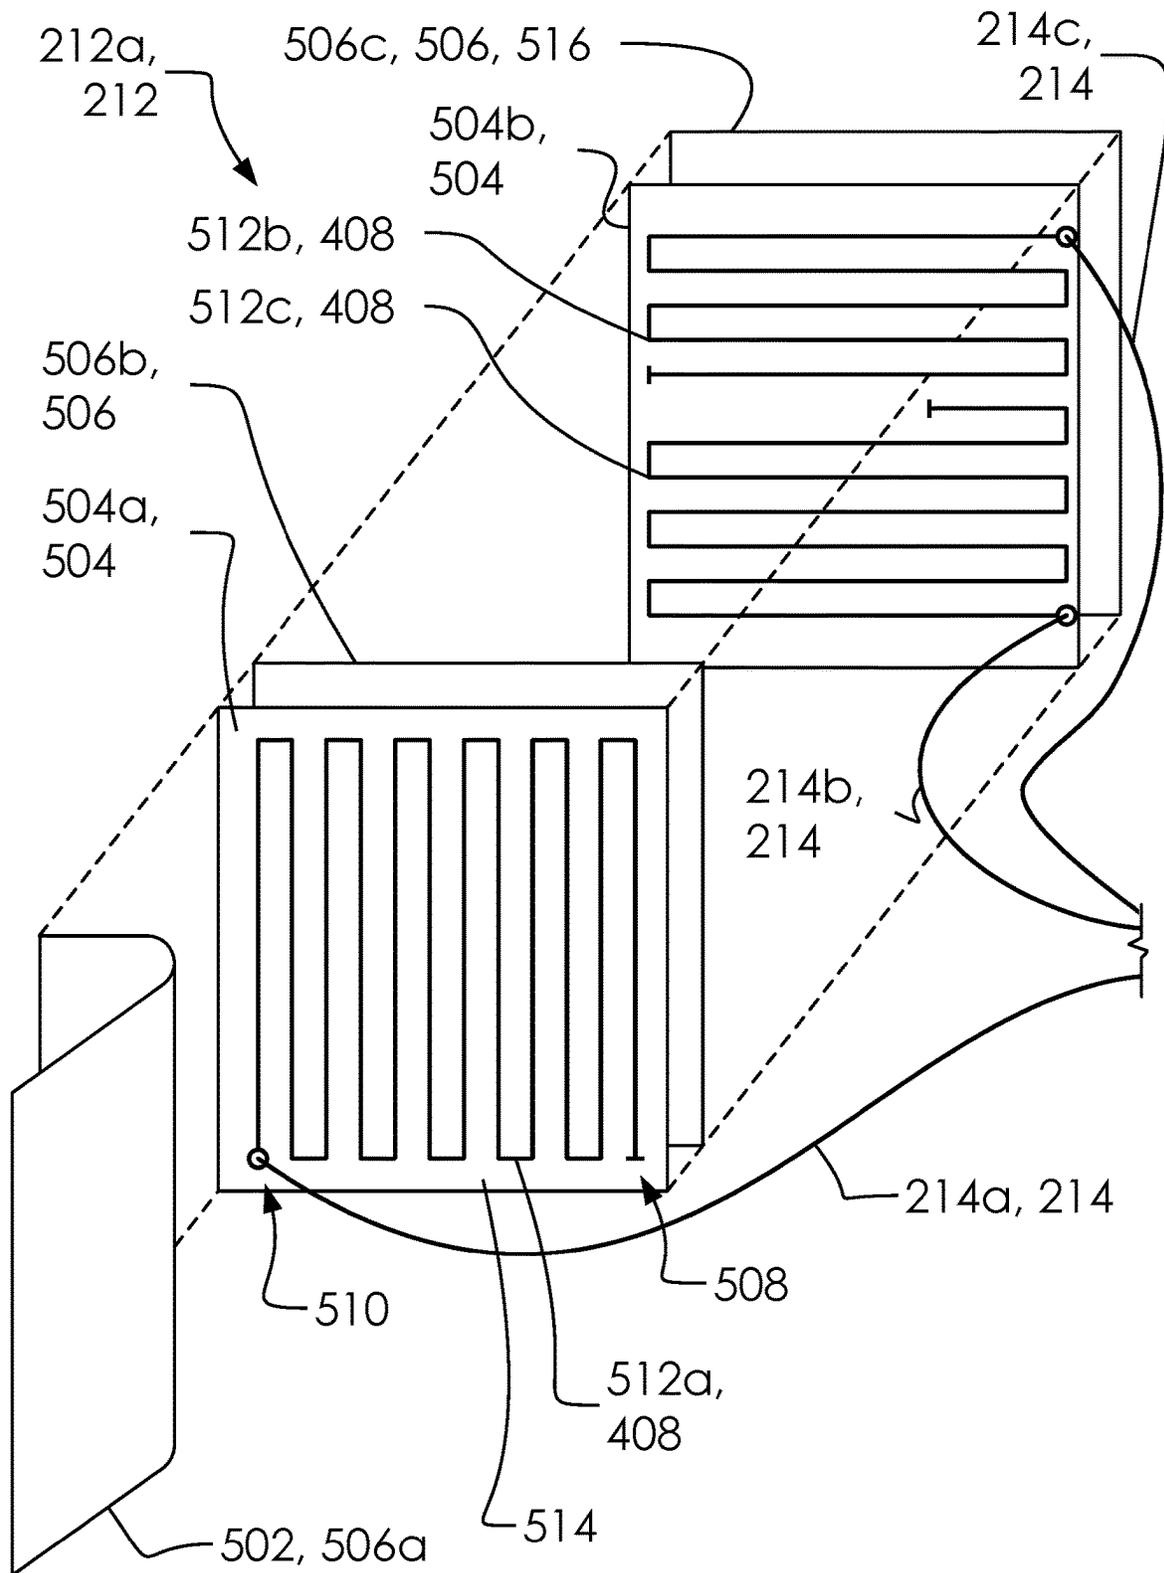


FIG. 5

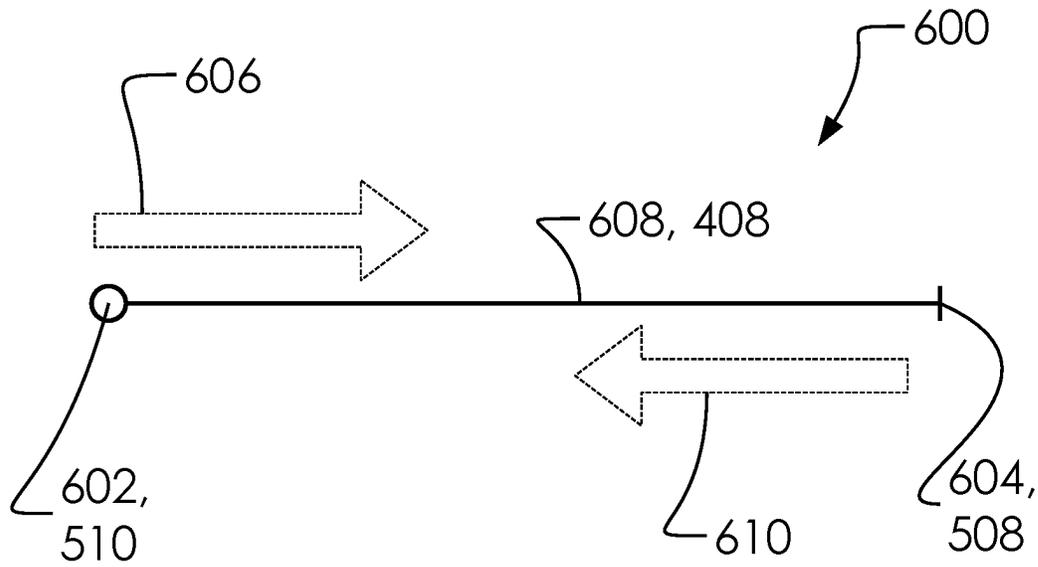


FIG. 6A

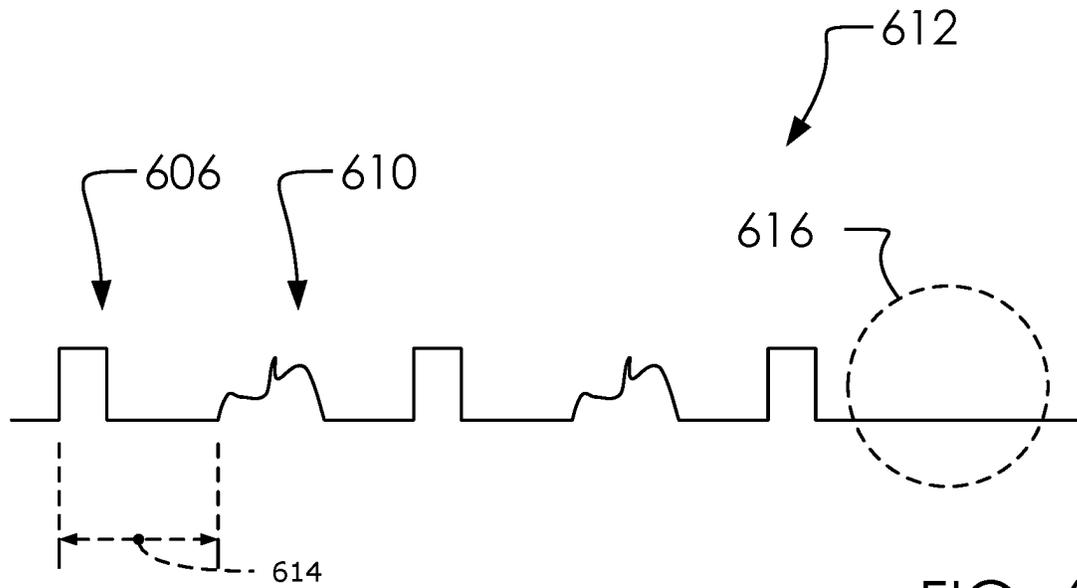


FIG. 6B

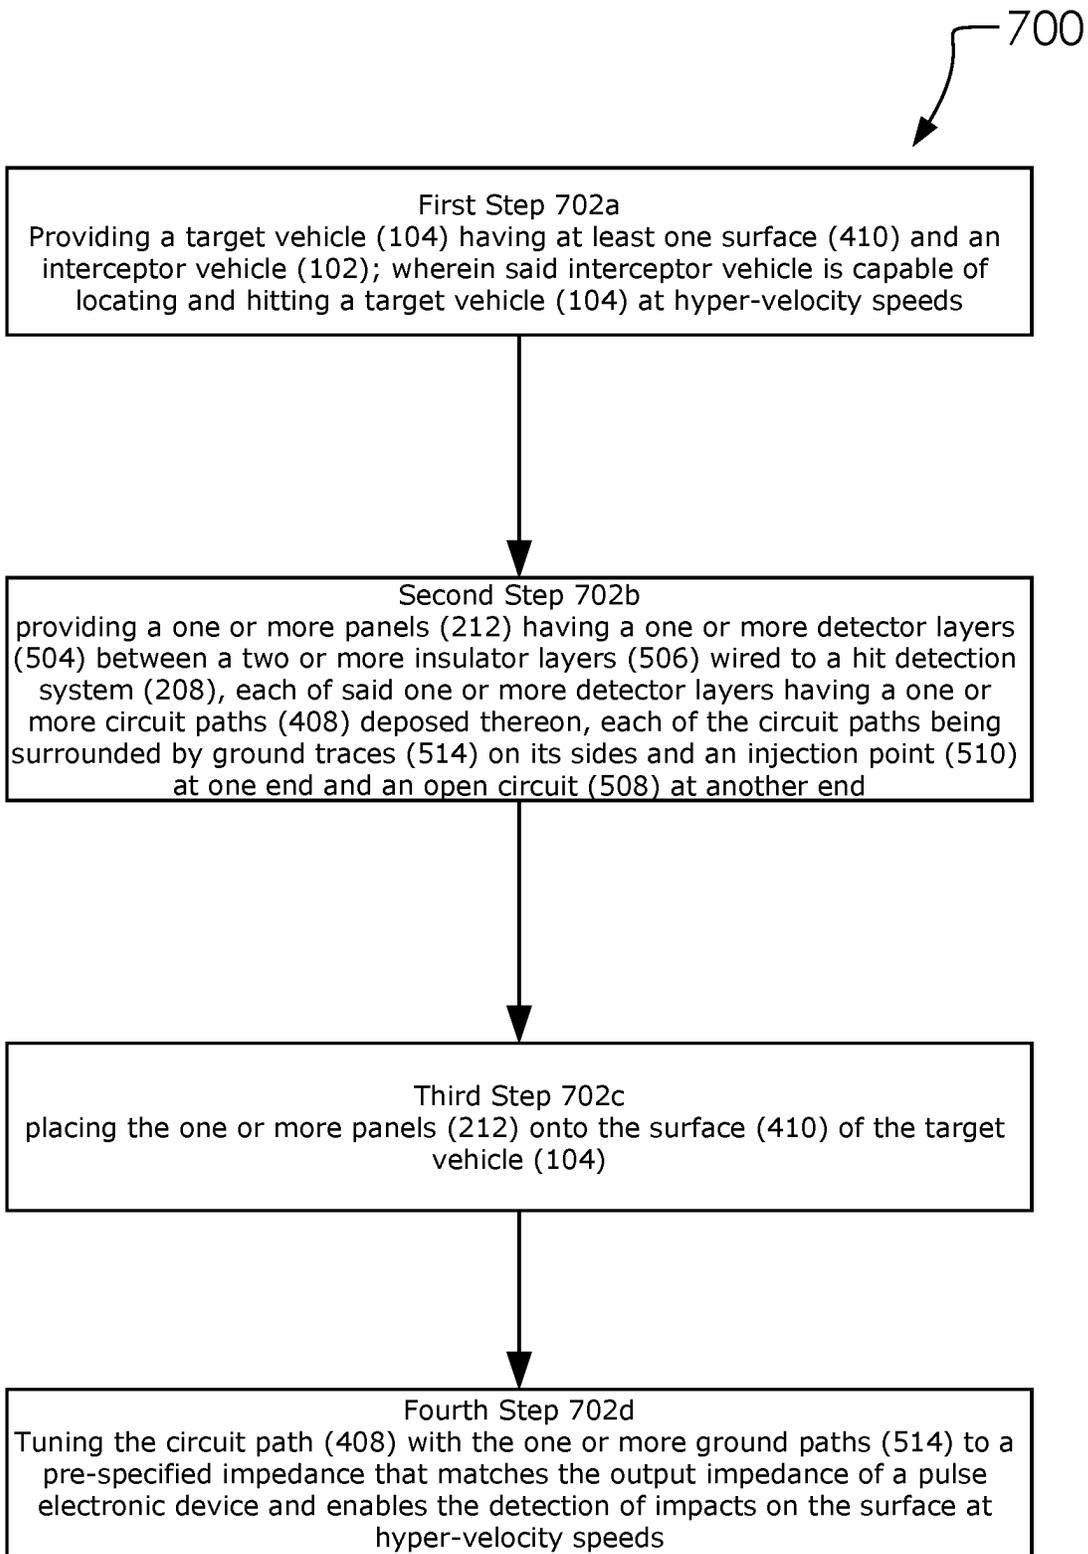


FIG. 7



**SYSTEM AND METHOD FOR DETECTING  
HIT LOCATIONS USING THE TIME  
DOMAIN**

CROSS-REFERENCE TO RELATED  
APPLICATIONS

This application claims benefit to U.S. Patent Application No. 62/466,336 filed on Mar. 2, 2017.

STATEMENT REGARDING FEDERALLY  
SPONSORED RESEARCH OR DEVELOPMENT  
(IF APPLICABLE)

Not applicable.

REFERENCE TO SEQUENCE LISTING, A  
TABLE, OR A COMPUTER PROGRAM LISTING  
COMPACT DISC APPENDIX (IF APPLICABLE)

Not applicable.

BACKGROUND OF THE INVENTION

Missile Defense for the US involves development of defensive weapons (missiles) that can be launched to intercept and destroy threat missiles launched by adversaries. In order to develop and test these defensive capabilities, MDA requires that target missiles be designed that faithfully represent known and expected threat vehicles.

A major challenge within the target missile community has always been to identify the exact location of first contact between a defensive missile and the target missile to which it is directed. The exact location is needed for two reasons:

(1) The defensive missile designers must know how well their guidance and control systems are working.

(2) Lethality assessment must show that the target has been completely neutralized.

Instrumentation systems integrated into target missiles have been designed to provide this information. Several technologies have been used to perform the location of the initial contact and transmit this information off the target to ground evaluation personnel—they include: (a) Grids of fiber optic materials organized into X Y grids so that any interruption of signals within the grid may be associated with two broken paths, (b) Grids of wire having signals present from one end to the other that are organized in grids to pinpoint initial contact by breaking the wires, (c) Make Screens that are layered conductive patches that are charged with electrical current. When a penetration of the screen occurs, the conductive layers are shorted and the voltage is dissipated. Although simple, the make screen is not an accurate locator of initial hit point since the entire screen is rendered inoperative with a single hit.

All three technologies and variants from different manufacturers become very difficult to use when targets begin to take on complex aerodynamic shapes. The problem is further complicated when the vehicle demonstrates the ability to maneuver and thus the defensive missile must be able to track any aspect ratio of the target and the initial hypervelocity impact (“HVI”) may occur at any point on the target vehicle.

What is needed in many instances is a “gap filler” technology that could be used in concert with the primary lethality assessment technology.

None of the known inventions and patents, taken either singularly or in combination, is seen to describe the instant disclosure as claimed.

BRIEF SUMMARY OF THE INVENTION

A time domain detection system to measure and report on hypervelocity impacts HVI between an interceptor vehicle and a target vehicle. Wherein, said time domain detection system comprises a target vehicle components installed on said target vehicle, a one or more panels arranged on a portion of said target vehicle at a potential HVI locations, and a hit detection system wired into said one or more panels. Said target vehicle components comprise at least said hit detection system, and a lines. Said one or more panels are wired into said hit detection system with said lines. Said hit detection system is configured to communicate with said one or more panels over said lines. Said one or more panels can each comprise a one or more detector panel layers, and a two or more insulator layers. Said two or more insulator layers comprise at least a top insulator layer and a bottom insulator layer of said one or more panels. Said one or more detector panel layers comprise at least a first detector panel layer. Said two or more insulator layers comprise at least a first insulator layer and a second insulator layer. Said top insulator layer is arranged over said first detector panel layer. Layers of said one or more panels continue such that each said one or more detector panel layers comprises an insulator below and above itself. The last layer of said one or more panels comprises said bottom insulator layer. Each of said one or more detector panel layers comprise at least one of a circuit path. Each said circuit path comprise an injection point end and an open circuit end. Said injection point end are connected to said hit detection system with one of said lines. Said hit detection system is configured to send a pulse through said injection point end, said pulse is reflected from said open circuit end and back to said injection point end as a return signal. Said hit detection system is configured to measure a reflection time between said pulse and said return signal and determine if said circuit path is in a nominal or broken condition. Said hit detection system is configured to send a plurality of said pulse and receive a plurality of said return signal to increase accuracy of measurement and to return information on progressive damage. Said hit detection system is configured to calculate a missing signal where said return signal does not return to said injection point end.

BRIEF DESCRIPTION OF THE SEVERAL  
VIEWS OF THE DRAWING

FIG. 1 illustrates a flight intercept scenario diagram of time domain detection system **100** with said target vehicle **104**.

FIG. 2 illustrates said target vehicle components **200** as a block diagram.

FIG. 3 illustrates an elevated notional front side view of target vehicle **104**.

FIG. 4A illustrates an elevated front side view of said target vehicle **104** with said flexible circuit card material **406**, with cutaways of said one or more panels **212**.

FIG. 4B illustrates an elevated front side view of target vehicle **104** with said potential HVI locations **404** being pointed out.

FIG. 5 illustrates an elevated exploded view of first panel **212a**.

FIG. 6A illustrates said high frequency pulse illustration **600**.

3

FIG. 6B illustrates said time domain signal graph **612**.  
 FIG. 7 illustrates said method of using a time domain  
 detection system **700**.  
 FIG. 8 illustrates a perspective exploded front side view  
 of first panel **212a**.

#### DETAILED DESCRIPTION OF THE INVENTION

The following description is presented to enable any  
 person skilled in the art to make and use the invention as  
 claimed and is provided in the context of the particular  
 examples discussed below, variations of which will be  
 readily apparent to those skilled in the art. In the interest of  
 clarity, not all features of an actual implementation are  
 described in this specification. It will be appreciated that in  
 the development of any such actual implementation (as in  
 any development project), design decisions must be made to  
 achieve the designers' specific goals (e.g., compliance with  
 system- and business-related constraints), and that these  
 goals will vary from one implementation to another. It will  
 also be appreciated that such development effort might be  
 complex and time-consuming, but would nevertheless be a  
 routine undertaking for those of ordinary skill in the field of  
 the appropriate art having the benefit of this disclosure.  
 Accordingly, the claims appended hereto are not intended to  
 be limited by the disclosed embodiments, but are to be  
 accorded their widest scope consistent with the principles  
 and features disclosed herein.

These parts are illustrated in the figures and discussed  
 below:

a time domain detection system **100**  
 an interceptor vehicle **102**  
 a target vehicle **104**  
 a first contact point **106**  
 a ground evaluation systems **108**  
 a ground **110**  
 a target vehicle components **200**  
 a guidance system **202**  
 a control system **204**  
 an instrumentation system **206**  
 a hit detection system **208**  
 a communications system **210**  
 a one or more panels **212**  
 a first panel **212a**  
 a second panel **212b**  
 a lines **214**  
 a first line **214a**  
 a second line **214b**  
 a third line **214c**  
 a one or more stages **302**  
 a first stage **302a**  
 a second stage **302b**  
 a target payload **304**  
 a potential HVI locations **404**  
 a first potential HVI location **404a**  
 a second potential HVI location **404b**  
 a flexible circuit card material **406**  
 a circuit path **408**  
 an exterior surface **410**  
 a top insulator layer **502**  
 a one or more detector panel layers **504**  
 a first detector panel layer **504a**  
 a second detector panel layer **504b**  
 a detector layer n **504n**  
 a two or more insulator layers **506**  
 a first insulator layer **506a**

4

a second insulator layer **506b**  
 an insulator layer n **506n**  
 an open circuit end **508**  
 an injection point end **510**  
 a first trace **512a**  
 a second trace **512b**  
 a third trace **512c**  
 a ground traces **514**  
 a bottom insulator layer **516**  
 a high frequency pulse illustration **600**  
 a starting point **602**  
 an open circuit reflection point **604**  
 a pulse **606**  
 a tuned conductive path **608**  
 a reflected signal **610**  
 a time domain signal graph **612**  
 a reflection time **614**  
 a missing signal **616**  
 a method of using a time domain detection system **700**  
 a first step **702a**  
 a second step **702b**  
 a third step **702c**  
 a fourth step **702d**  
 a bottom surface **800**  
 a top surface **802**

FIG. 1 illustrates a flight intercept scenario diagram of  
 time domain detection system **100** with said target vehicle  
**104**.

In one embodiment, said time domain detection system  
**100** can comprise one or more components on said target  
 vehicle **104** being configured to measure and report on  
 hypervelocity impacts (HVI) with said interceptor vehicle  
**102**; specifically, the location on said target vehicle **104**  
 of an impact between said interceptor vehicle **102** and said  
 target vehicle **104**.

One goal of said time domain detection system **100** is to  
 identify the impact location on said target vehicle **104** and  
 time of said HVI with said interceptor vehicle **102** in order  
 to improve guidance and control systems and to assess  
 whether said target vehicle **104** has been neutralized. In one  
 embodiment, said target vehicle **104** can communicate with  
 said remote evaluation systems **108** regarding the HVI.  
 Another goal of said time domain detection system **100** can  
 comprise enabling a very quick collection of data from said  
 target vehicle **104**.

For example, in one embodiment, said time domain  
 detection system **100** must collect data, encode and transmit  
 within a 40 microsecond window of time. In one embodi-  
 ment, said ground **110** can be on land, or sea. In another  
 embodiment, said remote evaluation systems **108** can be in  
 the air.

FIG. 2 illustrates said target vehicle components **200** as a  
 block diagram.

In one embodiment, said target vehicle components **200**  
 can comprise said guidance system **202**, said control system  
**204**, said instrumentation system **206**, said hit detection  
 system **208** and said communications system **210**.

In one embodiment, said one or more panels **212** can  
 comprise said first panel **212a** and said second panel **212b**.

In one embodiment, said lines **214** can comprise said first  
 line **214a**, said second line **214b** and said third line **214c**.

In one embodiment, said time domain detection system  
**100** can comprise said communications system **210**, said one  
 or more panels **212**, said second panel **212b** and said lines  
**214**.

Said target vehicle **104** can comprise a plurality of components and sensors for measuring and reporting events and conditions of said target vehicle **104**.

In one embodiment, said hit detection system **208** can comprise an FPGA configured to communicate with said one or more panels **212** and said communications system **210**. In one embodiment, said communications system **210** can be configured to transmit a status report from said hit detection system **208**. In one embodiment, said hit detection system **208** can communicate with said one or more panels **212** over said lines **214**.

In one embodiment, said communications system **210** can be destroyed with said target vehicle **104** and said interceptor vehicle **102** within 40 ms of contact. Accordingly, said time domain detection system **100** must detect, encode and broadcast a status of said target vehicle **104** in a short period of time such as 40 microseconds (as noted herein). In one embodiment, said time domain detection system **100** can function without guidance system **202**, control system **204** and/or instrumentation system **206** (although target vehicle **104** might be compromised). Said time domain detection system **100** can comprise a system for monitoring a vehicle of different types regardless of whether the other components among said target vehicle components **200** are in use.

FIG. 3 illustrates an elevated notional front side view of target vehicle **104**.

In one embodiment, said one or more stages **302** can comprise said first stage **302a** and said second stage **302b**.

In one embodiment, said target vehicle **104** can comprise said one or more stages **302** and said target payload **304**.

As is known in the art, destroying said target payload **304** is a desired result of deploying said target vehicle **104**. Said time domain detection system **100** can measure one or more signals to determine the success of said interceptor vehicle **102** in destroying said target payload **304**.

In one embodiment, said target vehicle **104** can comprise a non-military vehicle, although, as discussed herein military applications are enabled. One example of said time domain detection system **100** in use for non-military vehicles can comprise spacecraft.

FIG. 4A illustrates an elevated front side view of said target vehicle **104** with said flexible circuit card material **406**, with cutaways of said one or more panels **212**.

FIG. 4B illustrates an elevated front side view of target vehicle **104** with said potential HVI locations **404** being pointed out.

In one embodiment, said potential HVI locations **404** can comprise said first potential HVI location **404a** and said second potential HVI location **404b**.

In one embodiment, said flexible circuit card material **406** can comprise said circuit path **408**.

In one embodiment, said target vehicle **104** can comprise said exterior surface **410**.

In one embodiment, said time domain detection system **100** can comprise said potential HVI locations **404**.

In one embodiment, said target vehicle **104** can comprise said potential HVI locations **404** being areas where said time domain detection system **100** will not interfere with other structural parts of said target vehicle **104** and/or places of interest. As illustrated in FIG. 4B, said potential HVI locations **404** can be arranged in layers or patterns along said exterior surface **410** of said target vehicle **104**. Said time domain detection system **100** can be applied in various manners.

In one embodiment, said target vehicle **104** can comprise a cone shape such that said one or more panels **212** may not work unless they are flexible. In one embodiment, said one

or more panels **212** can comprise said flexible circuit card material **406** in order to conform to said target vehicle **104**.

In one embodiment, said flexible circuit card material **406** can comprise aluminum.

Said time domain detection system **100** can be used for primary hit detection where said potential HVI locations **404** are substantially all parts of said target vehicle **104**, not just difficult sensory areas. Said time domain detection system **100** could be used with spacecraft vehicles where detection, location, and evaluation of HVI events is desired.

As illustrated, said one or more panels **212** can be used to provide coverage. Illustrated on FIG. 4A is a cut away of the top layer of said one or more panels **212** to show underlying components as described below.

In another embodiment, said one or more panels **212** can be flat and inflexible circuits and remain functional, suited to flatter portions of said exterior surface **410**.

FIG. 5 illustrates an elevated exploded view of first panel **212a**.

In one embodiment, said one or more detector panel layers **504** can comprise said first detector panel layer **504a**, said second detector panel layer **504b** and said ground traces **514**.

In one embodiment, said first detector panel layer **504a** can comprise said first trace **512a**.

In one embodiment, said second detector panel layer **504b** can comprise said second trace **512b** and said third trace **512c**.

In one embodiment, said two or more insulator layers **506** can comprise said detector layer **n 504n**, said first insulator layer **506a**, said second insulator layer **506b**, said insulator layer **n 506n** and said bottom insulator layer **516**.

In one embodiment, said circuit path **408** can comprise said open circuit end **508**, said injection point end **510** and said injection point end **510**.

In one embodiment, said one or more panels **212** can comprise said top insulator layer **502**, said one or more detector panel layers **504**, said second detector panel layer **504b** and said two or more insulator layers **506**.

In one embodiment, said ground traces **514** can comprise ground paths deposited on either side of the path as well as on cover layers on the top and bottom that serve to tune the path to a specific impedance that matches the output impedance of the pulse electronics.

The patterns of the conductive paths of said circuit path **408** can be any pattern needed to cover specific areas where legacy hit detection techniques are not feasible due to shapes, sizes, or installation limitations.

The simple example would be a signal path laid in a spiral or a series of 180 degree reversals in the pattern that would result in a pattern of parallel paths, the distance between which would determine the baseline resolution of the impact location. This layout could be enhanced with a similar layout pattern superimposed at right angles to the first and driven by a redundant set of electronics. Other enhancements could be different patterns designed specifically cover a difficult area.

Said ground traces **514** on said one or more detector panel layers **504** can serve to block spurious radio frequency emissions that would not be acceptable to the radio frequency interference test criteria of Mil Standard **461**.

In one embodiment, said circuit path **408** can be routed back and forth across portions of said one or more detector panel layers **504** in order to increase a transmission time from said injection point end **510** to said open circuit end **508** and back. Additionally, a plurality of said circuit path **408** can be included on a single layer of said one or more

detector panel layers **504** (as illustrated with said second detector panel layer **504b** comprising second trace **512b** and third trace **512c**). Accordingly, a strike in said second detector panel layer **504b** can leave said second trace **512b** active and said third trace **512c** inactive, which would allow said time domain detection system **100** to calculate a location of a strike.

Said lines **214** can comprise one line to each of said injection point end **510** for said one or more detector panel layers **504**.

In one embodiment, said one or more panels **212** can each comprise said one or more detector panel layers **504**, said top insulator layer **502** and said two or more insulator layers **506**; wherein, said top insulator layer **502** is arranged over said first detector panel layer **504a** and said first insulator layer **506a** is below said first detector panel layer **504a**, and layers continue such that each one or more detector panel layers **504** comprises an insulator below and above itself. As illustrated, said bottom insulator layer **516** is said second insulator layer **506b** (although, said bottom insulator layer **516** would be the bottom most layer in another embodiment).

FIG. 6A illustrates said high frequency pulse illustration **600**.

FIG. 6B illustrates said time domain signal graph **612**.

In one embodiment, said high frequency pulse illustration **600** can comprise said starting point **602**, said open circuit reflection point **604**, said pulse **606**, said tuned conductive path **608**, said reflected signal **610**, said time domain signal graph **612**, said reflection time **614** and said missing signal **616**.

In one embodiment, said target vehicle **104** can comprise said tuned conductive path **608**.

The electrical physics on which the system is based is the performance of said pulse **606** of current in a said tuned conductive path **608**.

Said pulse **606** can comprise a tuned high frequency pulse.

Said pulse **606** can be fed into the conductive path at said starting point **602** of said tuned conductive path **608** and proceeds down the path at the speed of light minus the reactance effects of the wire. This reactance is controlled by the tuning design on said flexible circuit card material **406** (the flex card layout) and/or said circuit path **408** (the inherent reactance of the coaxial wire path).

Said tuned conductive path **608** is "open circuit" on the opposite end from the injection point (said open circuit reflection point **604**). When said pulse **606** reaches this open circuit condition, the energy of said pulse **606** is reflected back in the opposite direction from whence it came. The elapsed time from the injection of the pulse and the return of the pulse to said starting point **602** can be used to compute the distance traveled in the wire.

Prior to the exposure of said tuned conductive path **608** to a HVI, the time of travel remains constant. When the signal path is interrupted by an HVI event, the path is shortened and the time of signal travel is reduced. The elapsed new time of signal travel can now be used to compute the exact distance from the injection point to the interruption in the path due to the HVI. The "map" of the signal path is known relative to the target in which it is installed and thus the location of the HVI event on the target can be calculated.

The ultimate accuracy of the system depends on three critical areas of high frequency electrical design. Those three critical areas are described below.

First, square wave pulses placed into a reactive circuit (in this case a wire path) contain wide band frequency energy that will result in a wide band return pulse. The bandwidth

spreads the energy over time and thus reduces the consistency of the return signal and reduces the timing accuracy of the detector. Thus, the electronics that drives the system must be capable of creating a wave form that matches the reactance of the signal path. This pulse will travel down and back to the injection point with a minimum of time and frequency distortion.

Second, the electronics must be able to measure time to sub-nanosecond levels. The reason for this is the required spatial resolution of the system. The pulse travels the signal path at about a foot per nanosecond. To provide the needed system resolution, measurements of time must be at sub-nanosecond increments. To achieve this resolution, the electronics must be able to run clocks at 6 to 10 GHz speeds and be able to extract values from these clocks for transmission off the vehicle prior to the destruction of the system by the HVI event.

Third, the electronics must be capable of repeating pulses into the signal path as quickly as possible. This repeat time is limited by the impulse response of the signal path. It is desirable to damp the return pulse as quickly as possible so that another pulse may be injected into the path without inter-symbol interference. Further, the pulse repetition rate ("PRR") is limited by the time of travel. As the path becomes shorter due to the HVI damage, the PRR must be adjusted to the latest travel time. This adjustment must be made by the logic circuitry.

The system electronics transceiver (transmitter/receiver) consists of a pulse generator capable of injecting the appropriate pulse shape into the signal path and a pulse detector/receiver that is synchronized with high speed clocks that are capable of measuring the time between the injection of the pulse and the arrival of the resulting reflection. The transfer time is calibrated and thus the travel speed is known. This speed and the travel time will compute the distance to the end of the signal path with current resolutions of 2 inches. Since the ultimate spatial resolution depends upon the speed of the counters, faster circuits will result in higher system resolution.

The implementation of the system electronics of the present invention has been realized by the use of devices from a non-analogous art, namely integrated circuits that were designed especially for supporting cell tower communications in telecommunications. The telecommunication application requires logical switching of signals and the ultimate multiplexing of Gigabits of information in serial transmission via fiber optic links on fixed, land based stations. These commercial products are programmable gate arrays that are "programmed" with appropriate logic to support cell operations. The input/output ports on these circuits are supported by extremely high speed logic designed to output the high data rates needed to support optical communications paths. The unique contribution of the present invention to the art of HVI impact detection system is to define means by which the high speed I/O on the communications circuits could be programmed into high speed clocks that could perform the time measurements needed to support signal path transit. This has successfully been accomplished and can resolve time at 6.5 GHz. Newer communications circuits are now available that are switching at 10 GHz with promises in the industry of 20 GHz in the near future. Thus, the design of the HVI for targeting applications can continue to increase resolution via use of commercially available programmable hardware. The advantages of this technique against existing grids and acoustic wave measurements include:

(1) the conductive path is singular and can be wound about in hard to instrument areas on a vehicle;

(2) Known locations (map) of the conductive path will identify the location of any interruption on the vehicle;

(3) The conductive path may be fabricated from wire, or printed on flexible circuit card material and thus bonded into the vehicle with a minimum of installation complexity; and

(4) As the initial impact breach is enlarged by the incoming interceptor vehicle, the signal path could become shorter and shorter and thus specify times of travel that would relate to damage progression on the target.

In one embodiment, said hit detection system can be configured for sending a plurality of pulses in series through said injection point end, each of said plurality of pulses are reflected from said open circuit end and back to said injection point end as a return signal, measuring a reflection time between each of said pulse and said return signal, calculating whether each of said reflection times either remain constant, decrease or comprise a missing signal, calculating whether said circuit path is in said nominal condition or a broken condition where said reflection time decreases between pulses or said return signal does not return, continuing to measure for further changes in said reflection time after said broken condition is calculated to increase accuracy of measurement and to return information on progressive damage, calculating a current distance between said injection point and said open circuit for each of said plurality of pulses, and calculating a location of said hypervelocity impacts using said calculation of said current distance between said injection point and said open circuit.

FIG. 7 illustrates said method of using a time domain detection system 700.

In one embodiment, said time domain detection system 100 can comprise said method of using a time domain detection system 700 and said method of using a time domain detection system 700.

In one embodiment, said method of using a time domain detection system 700 can comprise said a plurality of steps: said first step 702a can comprise providing said target vehicle 104 having said exterior surface 410; wherein, said interceptor vehicle 102 can be capable of locating and hitting said target vehicle 104 at hyper-velocity speeds. Said second step 702b can comprise providing said one or more panels 212 having said one or more detector panel layers 504 between said two or more insulator layers 506 being wired to said hit detection system 208; wherein, each of said one or more detector panel layers 504 have said circuit path 408 being deposited thereon; further wherein, each among said circuit path 408 comprise said ground traces 514 between said circuit path 408 and said open circuit end 508 at one end and said injection point end 510 at another end. Said third step 702c can comprise placing said one or more panels 212 onto said exterior surface 410 of said target vehicle 104. Said fourth step 702d can comprise tuning said circuit path 408 with said ground traces 514 to a pre-specified impedance that matches the output impedance of a pulse electronic device and enables the detection of impacts on said exterior surface 410 at hyper-velocity speeds.

FIG. 8 illustrates a perspective exploded front side view of first panel 212a.

In one embodiment, said one or more panels 212 can comprise said bottom surface 800 and said top surface 802.

In one embodiment, said one or more panels 212 can comprise a flexible material (said flexible circuit card material 406), as illustrated, which can comprise aluminum material.

In one embodiment, said insulator layer n 506n and said detector layer n 504n can comprise a bottom set of said detector and insulator layers, for nomenclature purposes. In one embodiment, said bottom insulator layer 516 can comprise said bottom surface 800. In one embodiment, said bottom surface 800 can be adhered to said exterior surface 410 with adhesive, as is known in the art

The following sentences are included for completeness of this disclosure with reference to the claims.

A time domain detection system 100 to measure and report on hypervelocity impacts HVI between an interceptor vehicle 102 and a target vehicle 104. Wherein, said time domain detection system 100 comprises a target vehicle components 200 installed on said target vehicle 104, a one or more panels 212 arranged on a portion of said target vehicle 104 at a potential HVI locations 404, and a hit detection system 208 wired into said one or more panels 212. Said target vehicle components 200 comprise at least said hit detection system 208, and a lines 214. Said one or more panels 212 are wired into said hit detection system 208 with said lines 214. Said hit detection system 208 is configured to communicate with said one or more panels 212 over said lines 214. Said one or more panels 212 can each comprise a one or more detector panel layers 504, and a two or more insulator layers 506. Said two or more insulator layers 506 comprise at least a top insulator layer 502 and a bottom insulator layer 516 of said one or more panels 212. Said one or more detector panel layers 504 comprise at least a first detector panel layer 504a. Said two or more insulator layers 506 comprise at least a first insulator layer 506a and a second insulator layer 506b. Said top insulator layer 502 is arranged over said first detector panel layer 504a. Layers of said one or more panels 212 continue such that each said one or more detector panel layers 504 comprises an insulator below and above itself. The last layer of said one or more panels 212 comprises said bottom insulator layer 516. Each of said one or more detector panel layers 504 comprise at least one of a circuit path 408. Each said circuit path 408 comprise an injection point end 510 and an open circuit end 508. Said injection point end 510 are connected to said hit detection system 208 with one of said lines 214. Said hit detection system 208 is configured to send a pulse 606 through said injection point end 510, said pulse 606 is reflected from said open circuit end 508 and back to said injection point end 510 as a reflected signal 610. Said hit detection system 208 is configured to measure a reflection time 614 between said pulse 606 and said reflected signal 610 and determine if said circuit path 408 is in a nominal or broken condition. Said hit detection system 208 is configured to send a plurality of said pulse 606 and receive a plurality of said reflected signal 610 to increase accuracy of measurement and to return information on progressive damage. Said hit detection system 208 is configured to calculate a missing signal 616 where said reflected signal 610 does not return to said injection point end 510.

Said target vehicle components 200 further comprises a communications system 210 and. Said hit detection system 208 encodes status reports related to said target vehicle 104 and transmits the same using said communications system 210.

Said time domain detection system 100 from claim 1. Said one or more panels 212 are flexible materials being adapted to adhere to nonplanar surfaces.

Said target vehicle 104 comprises a cone shape. Said one or more panels 212 are arranged around an exterior surface 410 of said target vehicle 104.

## 11

Said one or more panels **212** are a flat and inflexible circuits suited to flatter portions of an exterior surface **410**.

Said lines **214** comprises one line to each of said injection point end **510** for said one or more detector panel layers **504**.

A plurality of said circuit path **408** are included on a single among said one or more detector panel layers **504**. Accord- 5  
ingly, said one or more detector panel layers **504** is config-  
ured to be pierced in a first trace **512a** and remain intact on  
a second trace **512b**, where said first trace **512a** and said  
second trace **512b** are on the same said one or more detector 10  
panel layers **504**.

Said circuit path **408** are routed back and forth across portions of said one or more detector panel layers **504** in order to increase a transmission time from said injection point end **510** to said open circuit end **508** and back. 15

Various changes in the details of the illustrated operational methods are possible without departing from the scope of the following claims. Some embodiments may combine the activities described herein as being separate steps. Similarly, one or more of the described steps may be 20  
omitted, depending upon the specific operational environ-  
ment the method is being implemented in. It is to be understood that the above description is intended to be illustrative, and not restrictive. For example, the above-  
described embodiments may be used in combination with 25  
each other. Many other embodiments will be apparent to those of skill in the art upon reviewing the above description. The scope of the invention should, therefore, be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled. 30  
In the appended claims, the terms “including” and “in which” are used as the plain-English equivalents of the respective terms “comprising” and “wherein.”

The invention claimed is:

**1.** A time domain detection system to measure and report 35  
on one or more hypervelocity impacts (HVI) between an interceptor vehicle and a target vehicle; wherein,  
said time domain detection system comprises  
a target vehicle components installed on said target 40  
vehicle,  
one or more panels arranged on a portion of said target vehicle at potential HVI locations, and  
a hit detection system wired into said one or more panels;  
said target vehicle components comprise at least said hit 45  
detection system, and lines;  
said one or more panels are wired into said hit detection system with said lines;  
said hit detection system is configured to communicate with said one or more panels over said lines; 50  
said one or more panels can each comprise one or more detector panel layers, and two or more insulator layers;  
said two or more insulator layers comprise at least a top insulator layer and a bottom insulator layer of said one or more panels; 55  
said one or more detector panel layers comprise at least a first detector panel layer;  
said two or more insulator layers comprise at least a first insulator layer and a second insulator layer;  
said top insulator layer is arranged over said first detector 60  
panel layer;  
said two or more insulator layers of said one or more panels continue such that each said one or more detector panel layers comprises one insulator layer below and above itself; 65  
a last layer of said one or more panels comprises said bottom insulator layer;

## 12

each of said one or more detector panel layers comprise at least one circuit path;

each said at least one circuit path comprise an injection point end and an open circuit end;

said injection point end, of each said at least one circuit path, are connected to said hit detection system with one of said lines;

said hit detection system is configured for:

sending a plurality of pulses in series through said injection point end, each of said plurality of pulses are reflected from said open circuit end and back to said injection point end as a return signal,

measuring reflection times between each pulse of said plurality of pulses and its corresponding said return signal,

calculating whether each of said reflection times either remain constant, decrease or comprise a missing signal,

calculating whether said at least one circuit path is in a nominal condition or a broken condition where each said reflection times decreases between pulses or said return signal does not return,

continuing to measure for further changes in said reflection times after said broken condition is calculated to increase accuracy of measurement and to return information on progressive damage,

calculating a current distance between said injection point end and said open circuit end for each pulse of said plurality of pulses, and

calculating a location of said hypervelocity impacts HVI using said calculation of said current distance between said injection point end and said open circuit end.

**2.** The time domain detection system from claim **1**, wherein:

said target vehicle components further comprises a communications system; and

said hit detection system encodes status reports related to said target vehicle and transmits the same using said communications system.

**3.** The time domain detection system from claim **1**, wherein:

said one or more panels are flexible materials being adapted to adhere to nonplanar surfaces.

**4.** The time domain detection system from claim **3**, wherein:

said target vehicle comprises a cone shape; and  
said one or more panels are arranged around an exterior surface of said target vehicle.

**5.** The time domain detection system from claim **1**, wherein:

said one or more panels are flat and inflexible circuits suited to flatter portions of an exterior surface.

**6.** The time domain detection system from claim **1**, wherein:

said lines comprises one line to each of said injection point end for said one or more detector panel layers.

**7.** The time domain detection system from claim **1**, wherein:

a plurality of said at least one circuit path are included on a single among said one or more detector panel layers; and

accordingly, said one or more detector panel layers are configured to be pierced in a first trace and remain intact on a second trace, where said first trace and said second trace are on the same said one or more detector panel layers.

13

8. The time domain detection system from claim 1, wherein:

said at least one circuit path are routed back and forth across portions of said one or more detector panel layers to increase a transmission time from said injection point end to said open circuit end and back.

9. The time domain detection system from claim 1, wherein:

said one or more panels are flexible materials being adapted to adhere to irregular surfaces.

10. The time domain detection system from claim 1, wherein:

said hit detection system comprises an electronic transceiver configured to measure time to sub-nanosecond levels by using a clock of at least 6 GHz.

11. The time domain detection system from claim 1, wherein:

said plurality of pulses comprise square wave pulses contain wide band frequency energy that result in a wide band return pulse; and

electronics that drive said hit detection system are capable of creating a wave form that matches a reactance of a signal path to minimize of time and frequency distortion.

12. The time domain detection system from claim 1, wherein:

as said reflection time becomes shorter due to damage said hit detection system is configured to increase a pulse repetition rate and send another pulse to increase accuracy.

13. A time domain detection system to measure and report on a one or more hypervelocity impacts (HVI) between an object and a vehicle; wherein,

said time domain detection system comprises lines,

one or more panels arranged on a portion of said vehicle at potential HVI locations, and

a hit detection system wired into said one or more panels; said one or more panels are wired into said hit detection system with said lines;

said hit detection system is configured to communicate with said one or more panels over said lines;

said one or more panels can each comprise one or more detector panel layers, and two or more insulator layers;

said two or more insulator layers comprise at least a top insulator layer and a bottom insulator layer of said one or more panels;

said one or more detector panel layers comprise at least a first detector panel layer;

said two or more insulator layers comprise at least a first insulator layer and a second insulator layer;

said top insulator layer is arranged over said first detector panel layer;

14

said two or more insulator layers of said one or more panels continue such that each said one or more detector panel layers comprises an insulator layer below and above itself;

a last layer of said one or more panels comprises said bottom insulator layer;

each of said one or more detector panel layers comprise at least one circuit path;

each said at least one circuit path comprise an injection point end and an open circuit end;

said injection point end, of each said at least one circuit path, are connected to said hit detection system with one of said lines;

said hit detection system is configured for:

sending a plurality of pulses in series through said injection point end, each of said plurality of pulses are reflected from said open circuit end and back to said injection point end as a return signal,

measuring reflection times between each pulse of said plurality of pulses and its corresponding said return signal,

calculating whether each of said reflection times either remain constant, decrease or comprise a missing signal,

calculating whether said circuit path is in a nominal condition or a broken condition where each said reflection times decreases between pulses or said return signal does not return,

continuing to measure for further changes in said reflection times after said broken condition is calculated to increase accuracy of measurement and to return information on progressive damage,

calculating a current distance between said injection point end and said open circuit end for each of said plurality of pulses, and

calculating a location of said hypervelocity impacts HVI using said calculation of said current distance between said injection point end and said open circuit end.

14. The time domain detection system from claim 13, wherein:

said hit detection system comprises an electronic transceiver configured to measure time to sub-nanosecond levels by using a clock of at least 6 GHz.

15. The time domain detection system from claim 13, wherein:

said plurality of pulses comprise square wave pulses contain wide band frequency energy that result in a wide band return pulse; and

electronics that drive said hit detection system are capable of creating a wave form that matches a reactance of a signal path to minimize of time and frequency distortion.

\* \* \* \* \*