



US011845384B2

(12) **United States Patent**
Harkins

(10) **Patent No.:** **US 11,845,384 B2**

(45) **Date of Patent:** **Dec. 19, 2023**

- (54) **TOOLBOX**
- (71) Applicant: **Wesley Harkins**, Hereford, TX (US)
- (72) Inventor: **Wesley Harkins**, Hereford, TX (US)
- (73) Assignee: **Ruf N It Harkins LLC**, Hereford, TX (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 159 days.

4,138,019 A *	2/1979	Smith	A47F 5/0807
				248/220.31
4,450,989 A *	5/1984	Bogar, Jr.	A47B 81/005
				224/571
4,501,457 A *	2/1985	Pond	A47B 5/06
				224/567
5,125,518 A	6/1992	Ward		
5,221,132 A *	6/1993	Combs	B25H 3/04
				211/DIG. 1
5,740,883 A	4/1998	Trank		
5,845,952 A *	12/1998	Albertini	B60P 3/14
				296/24.45
6,113,202 A	9/2000	Germano		
6,578,937 B1	6/2003	Thoman		

(21) Appl. No.: **17/224,804**

(22) Filed: **Apr. 7, 2021**

(65) **Prior Publication Data**
 US 2021/0316670 A1 Oct. 14, 2021

Related U.S. Application Data
 (60) Provisional application No. 63/008,433, filed on Apr. 10, 2020.

(51) **Int. Cl.**
B60R 11/06 (2006.01)
B60R 9/02 (2006.01)

(52) **U.S. Cl.**
 CPC **B60R 11/06** (2013.01); **B60R 9/02** (2013.01)

(58) **Field of Classification Search**
 CPC .. B60R 11/06; B60R 9/02; B25H 3/00; B25H 3/02; A47F 5/0838
 USPC 211/103, 208; 224/565; 248/220.21, 243
 See application file for complete search history.

(56) **References Cited**
 U.S. PATENT DOCUMENTS

3,512,654 A *	5/1970	Jay	A47B 96/145
				411/356
3,794,183 A *	2/1974	Colbridge	A47B 46/00
				211/208

FOREIGN PATENT DOCUMENTS


DE	202011004931 U1 *	8/2012	A47F 5/0093
EP	2225971 A1 *	9/2010	A47B 57/16
EP	4029657 A1 *	7/2022	B25H 1/02

Primary Examiner — Justin M Larson
 (74) *Attorney, Agent, or Firm* — Shannon Warren

(57) **ABSTRACT**

A toolbox accessory system for organizing and utilizing a utility box of a truck. The toolbox accessory system comprises one or more rail assemblies attached to one or more back walls of the utility box. The toolbox accessory system comprises one or more accessory assemblies configured to selectively attach to the one or more rail assemblies. The one or more accessory assemblies are configured to selectively store tools within one or more utility boxes. The one or more accessory assemblies are attached in a vertical configuration along the one or more back walls of the one or more utility boxes. A box shell comprises the one or more back walls, a top portion, a bottom portion, two side walls, and a front opening.

20 Claims, 29 Drawing Sheets

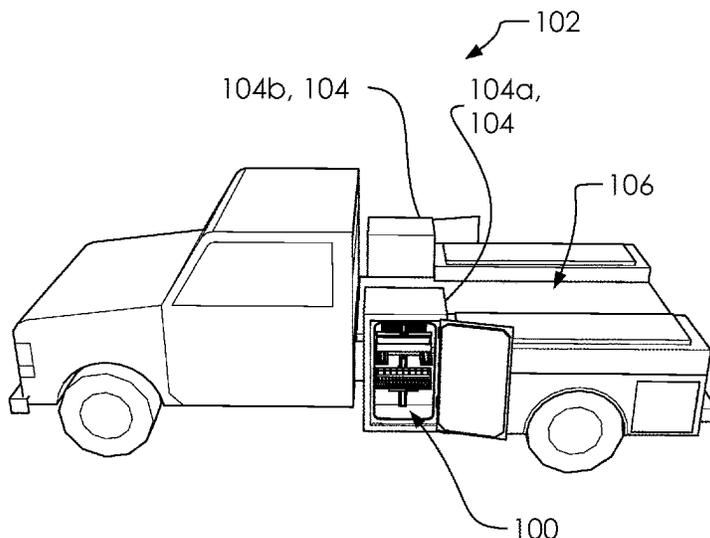

(56)

References Cited

U.S. PATENT DOCUMENTS

6,591,995 B1 *	7/2003	Grove	A47F 5/0815 211/87.01	8,210,368 B2 *	7/2012	Schwartzkopf	A47B 96/061 211/103
6,619,772 B2	9/2003	Dierbeck		8,550,259 B1 *	10/2013	McCoy	H02G 3/30 211/13.1
6,932,225 B2 *	8/2005	Rowe	A47B 57/30 211/90.02	8,636,154 B2 *	1/2014	Chinn	A61G 3/0891 211/106.01
7,052,067 B2 *	5/2006	Walker	B60R 11/02 296/37.6	9,434,321 B2 *	9/2016	Perron	A47B 49/004
7,510,078 B2 *	3/2009	Schmidt	B25H 3/003 206/372	9,597,792 B1 *	3/2017	Kao	B25H 3/04
7,798,336 B2 *	9/2010	Shiao	B25H 3/04 211/DIG. 1	9,914,209 B2	3/2018	Grela	
D633,719 S *	3/2011	Koehn	D3/318	10,398,203 B2 *	9/2019	Schroeder	A45C 3/02
7,946,663 B2 *	5/2011	Holcomb	E05B 65/46 312/217	10,952,534 B2 *	3/2021	Peck	A47F 5/0815
8,011,484 B2 *	9/2011	McIntyre	A45C 5/04 190/110	11,489,325 B2 *	11/2022	McCoy	F16L 3/137
8,061,539 B2 *	11/2011	Punzel	A47B 47/021 248/220.21	11,490,700 B2 *	11/2022	Schroeder	A45C 3/02
8,146,755 B2 *	4/2012	Schwartzkopf	A47F 5/0838 211/103	2008/0179203 A1 *	7/2008	Mueller	B25H 1/12 206/216
8,177,079 B2 *	5/2012	Schwartzkopf	A47F 5/101 211/94.01	2011/0192810 A1 *	8/2011	Kao	B25H 3/028 211/70.6
				2012/0085721 A1 *	4/2012	Michael J.	A47F 5/0853 211/103
				2012/0261450 A1 *	10/2012	Moore	B25H 3/02 224/404
				2017/0057425 A1	3/2017	Pulleyblank	
				2019/0152409 A1 *	5/2019	Klatt	B60R 11/06
				2021/0068574 A1 *	3/2021	Riepe	E05G 1/026
				2021/0316670 A1 *	10/2021	Harkins	B60R 9/02
				2022/0111912 A1 *	4/2022	McKinney	B62D 25/2054

* cited by examiner

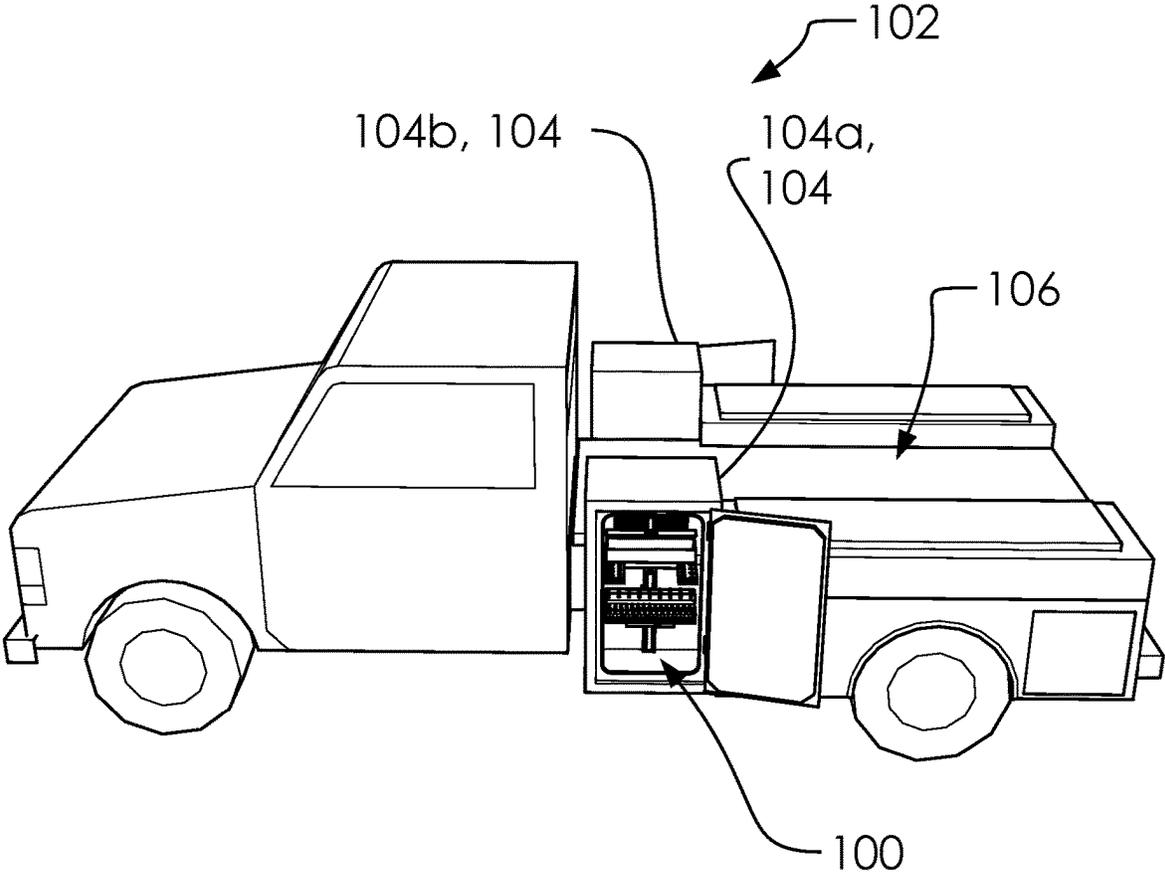


FIG. 1

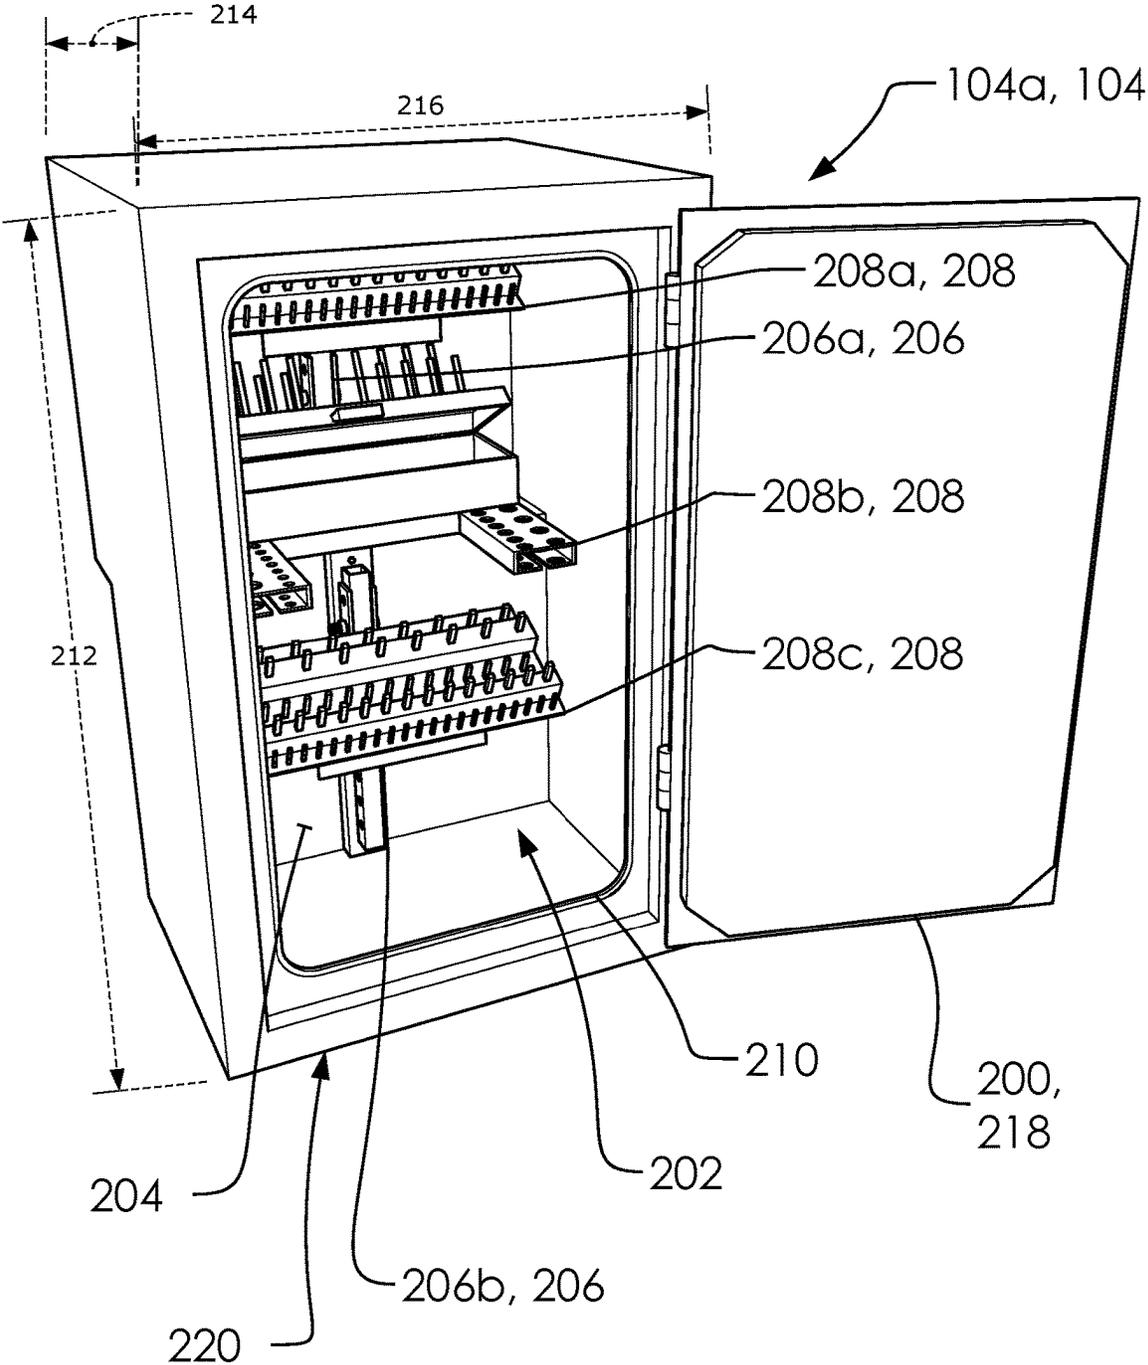


FIG. 2

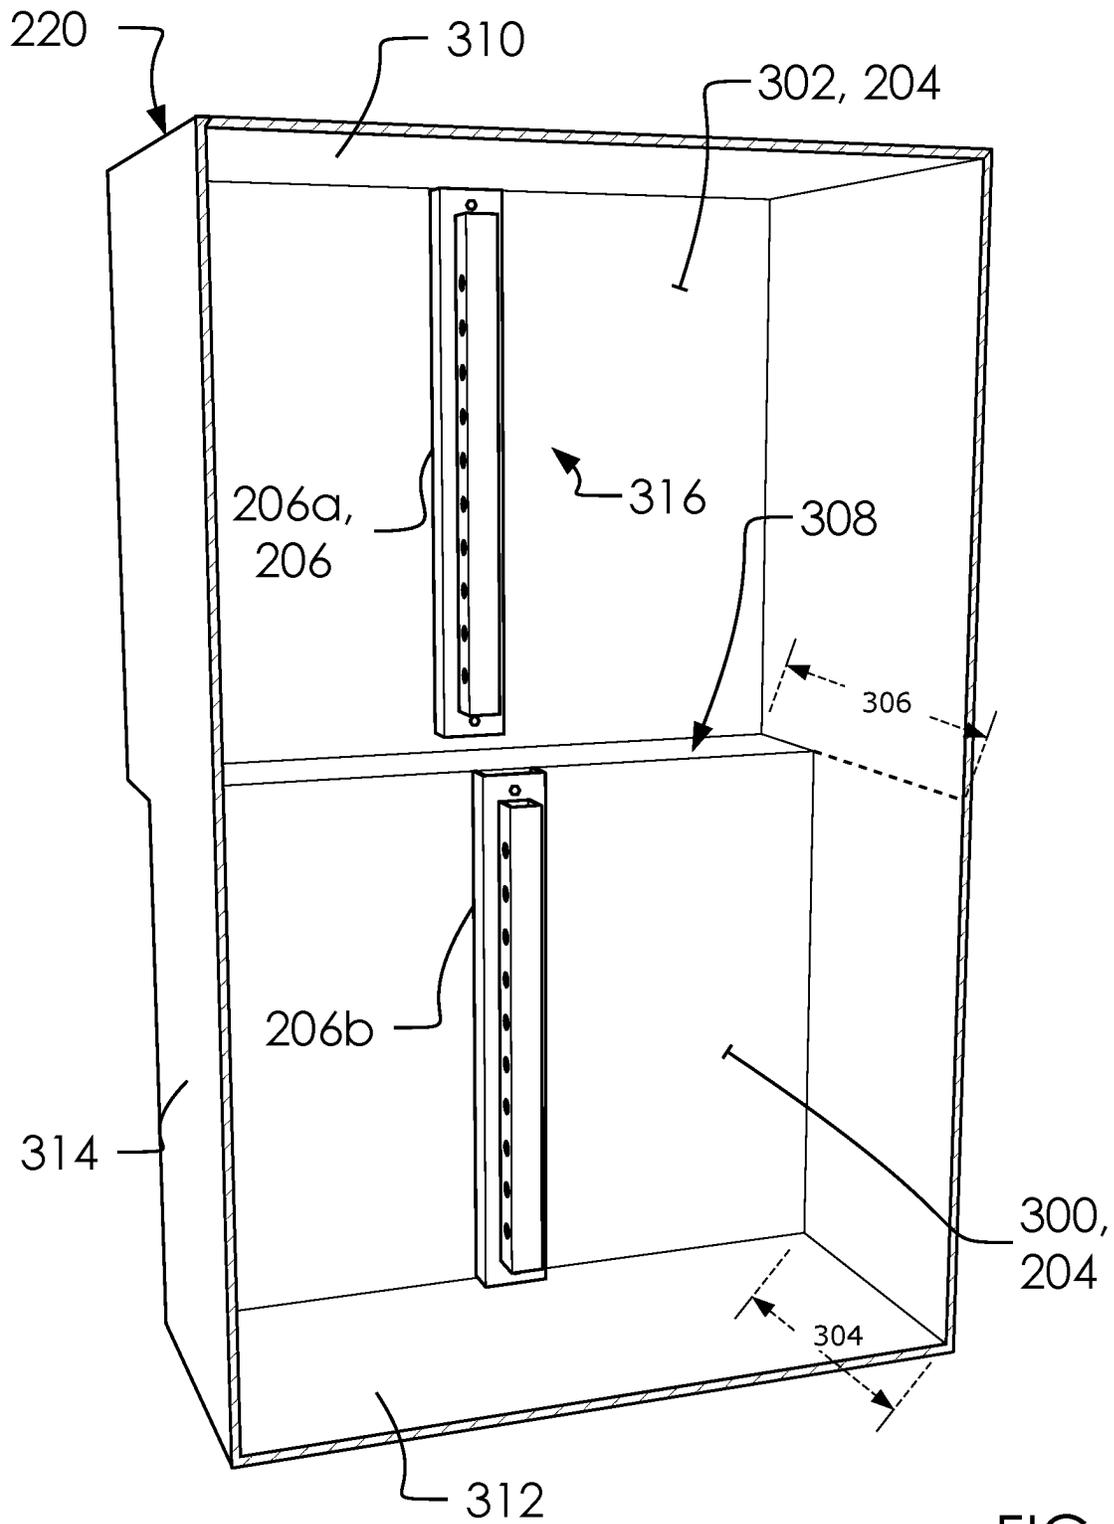


FIG. 3

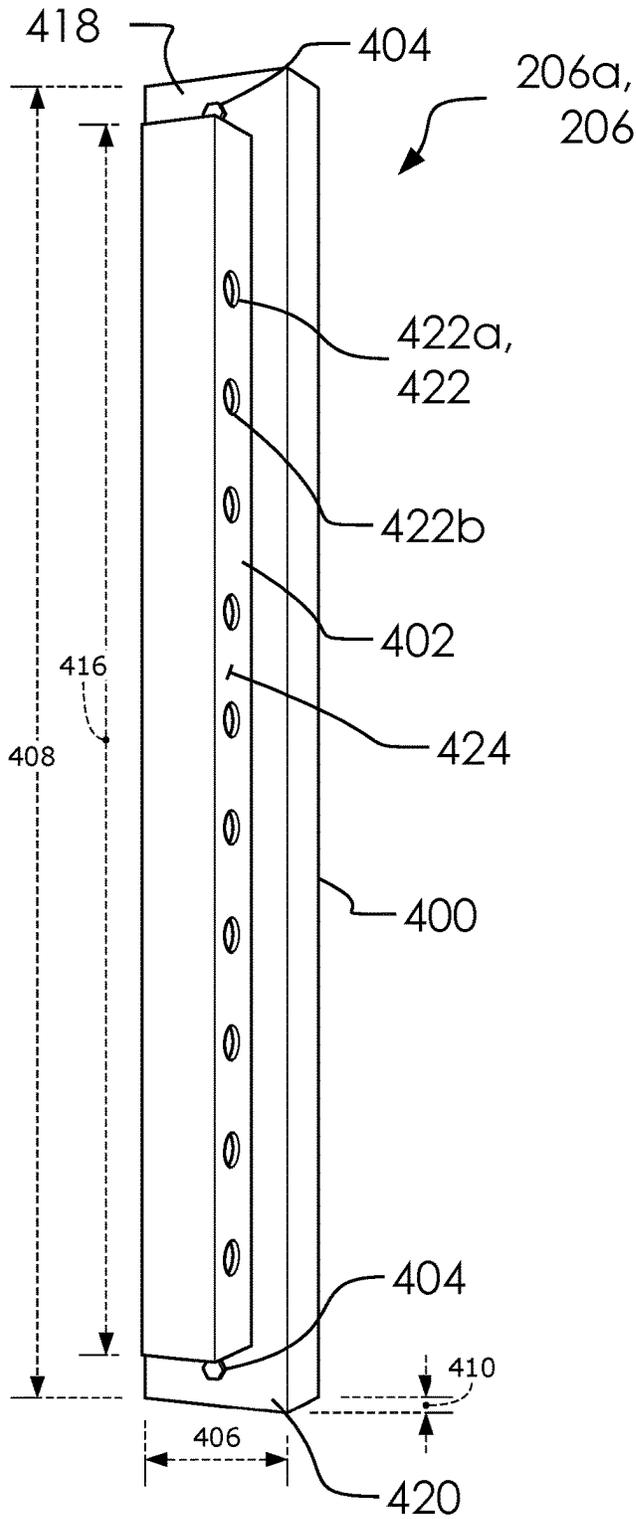


FIG. 4A

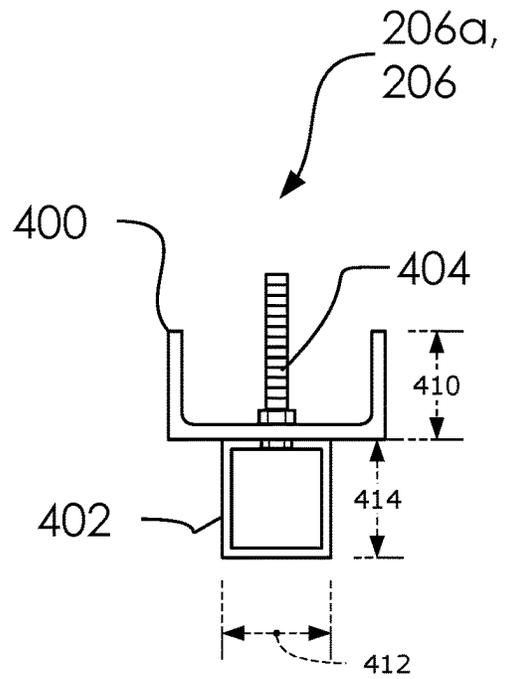


FIG. 4B

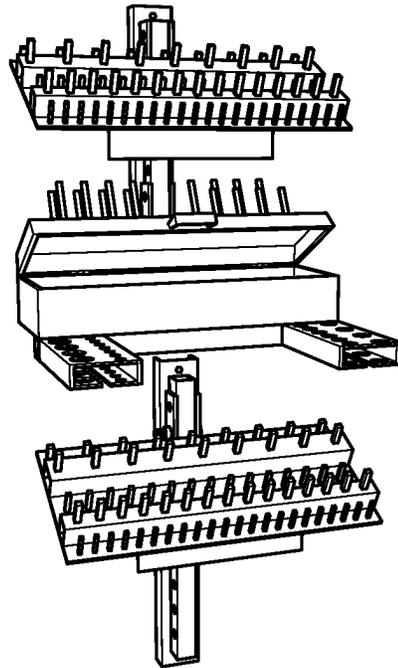


FIG. 5A

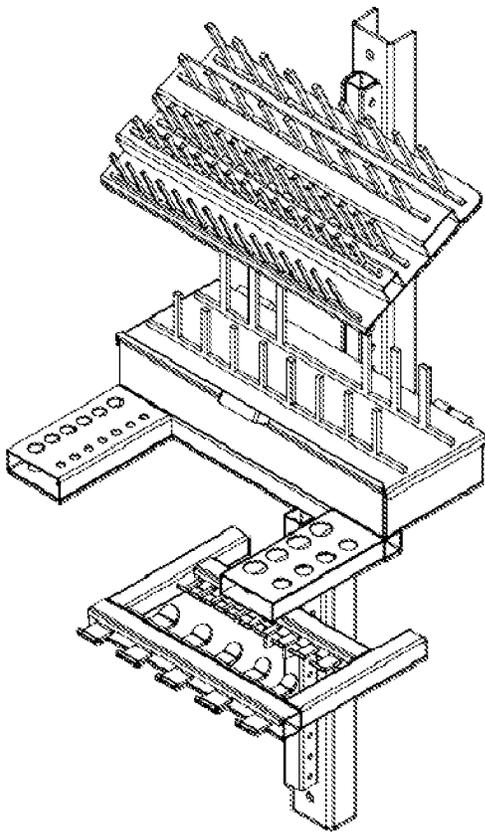


FIG. 5B

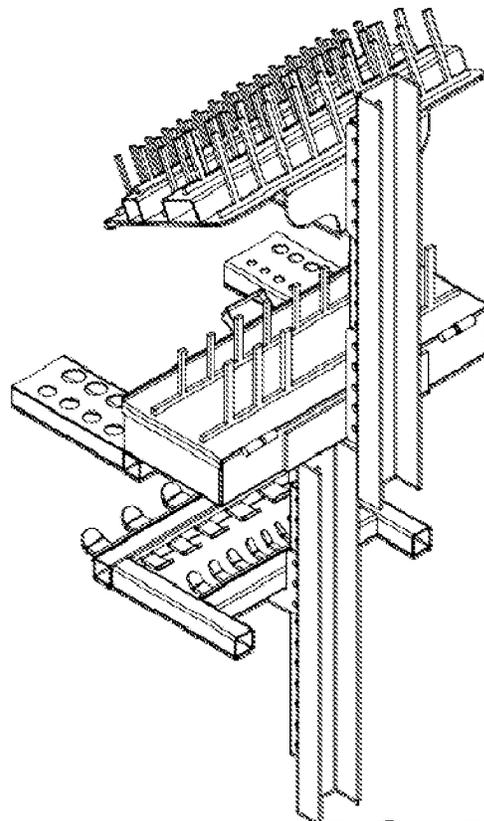


FIG. 5C

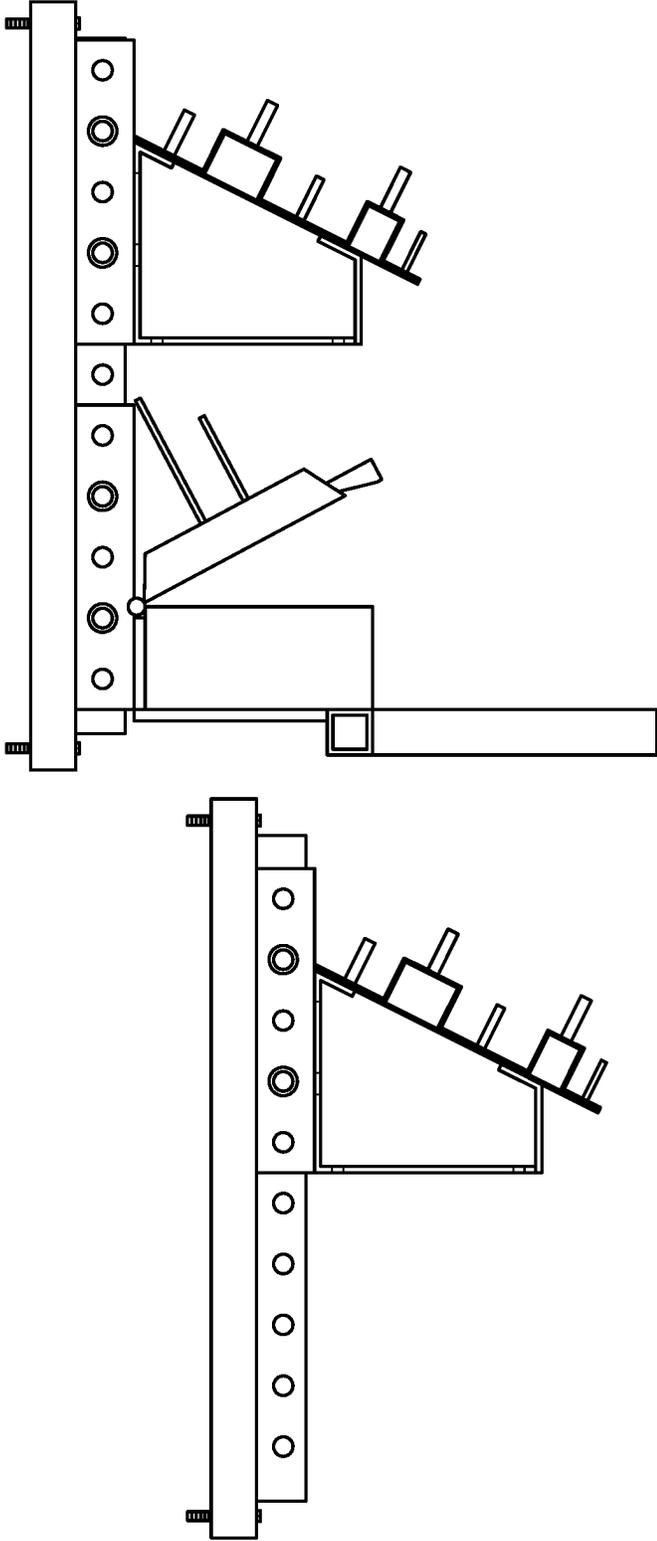


FIG. 6

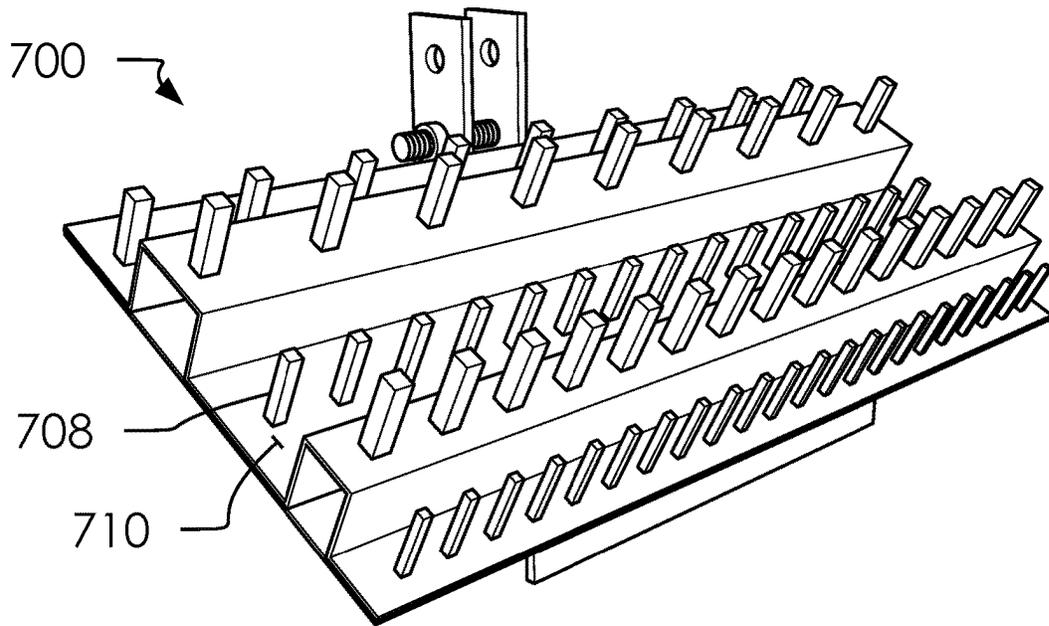


FIG. 7A

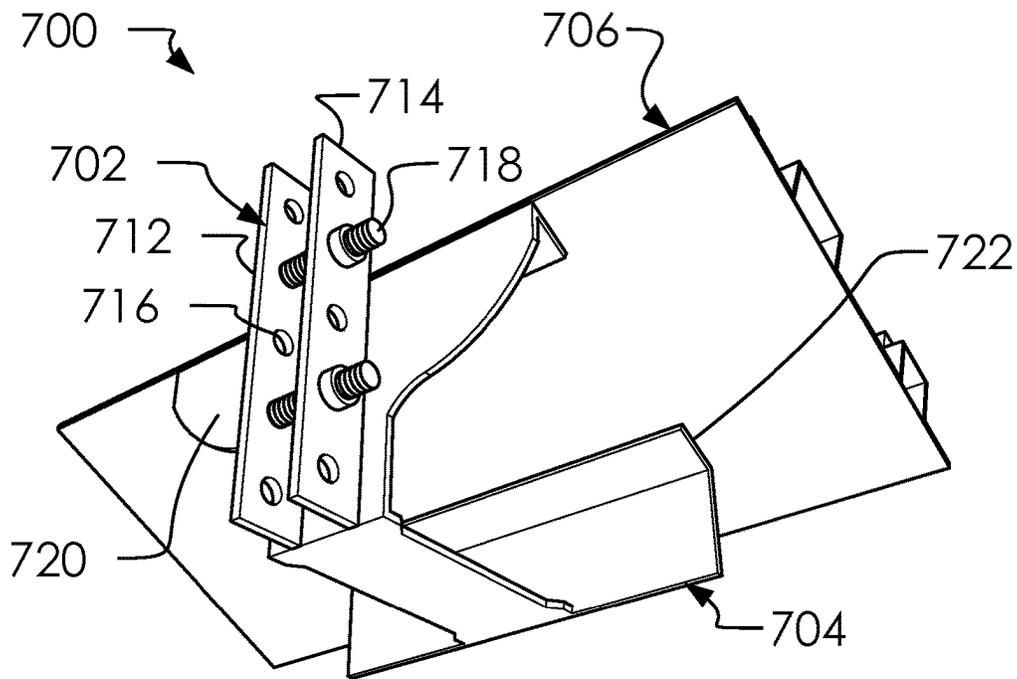


FIG. 7B

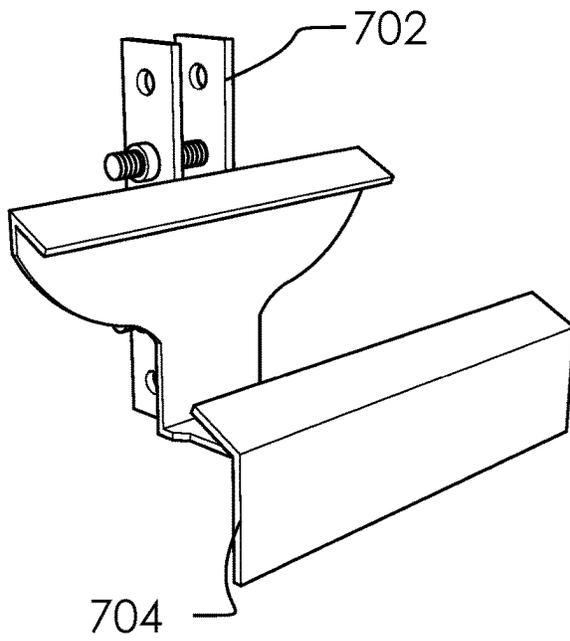


FIG. 8A

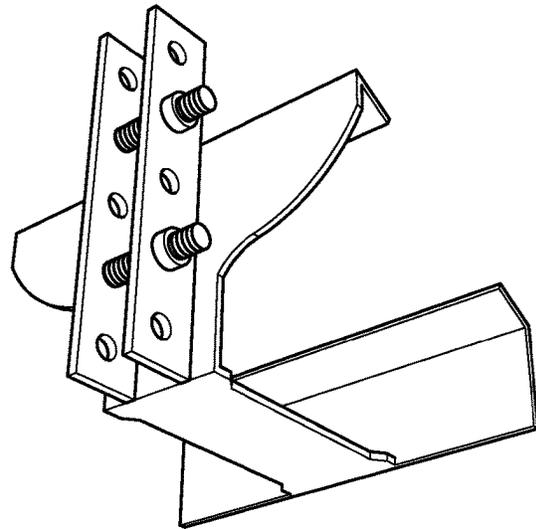


FIG. 8B

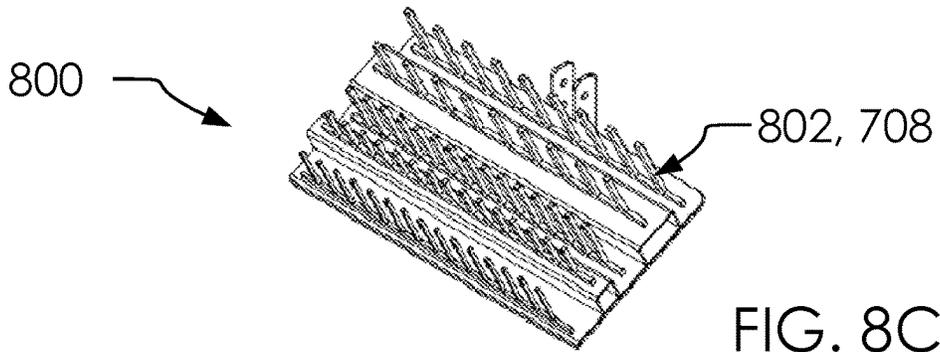


FIG. 8C

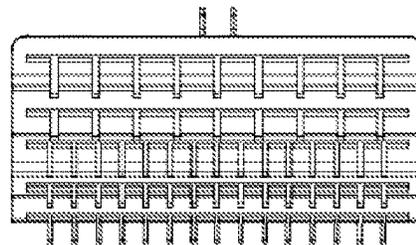


FIG. 8D

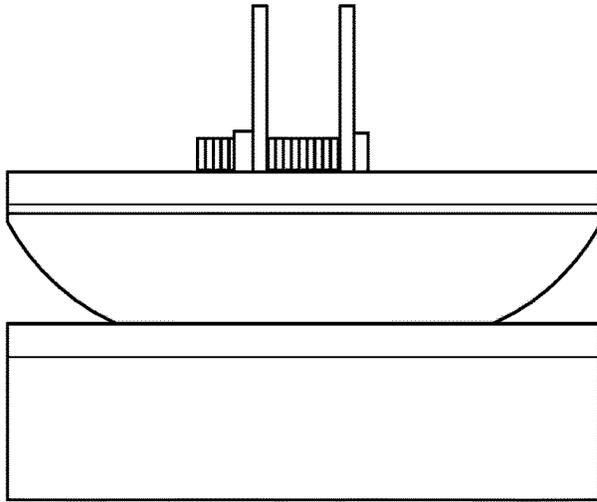


FIG. 9A

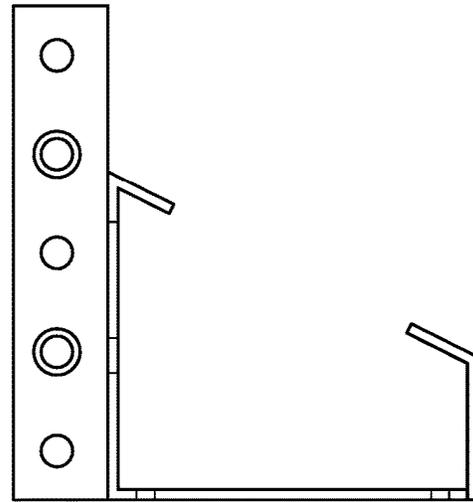


FIG. 9B

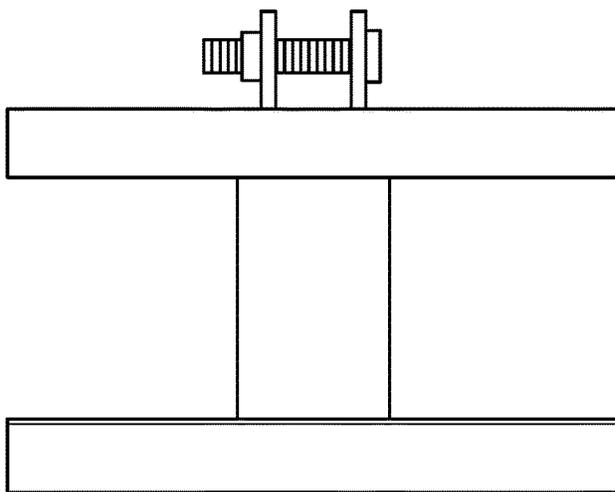


FIG. 9C

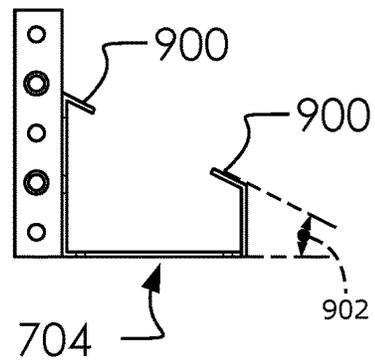


FIG. 9D

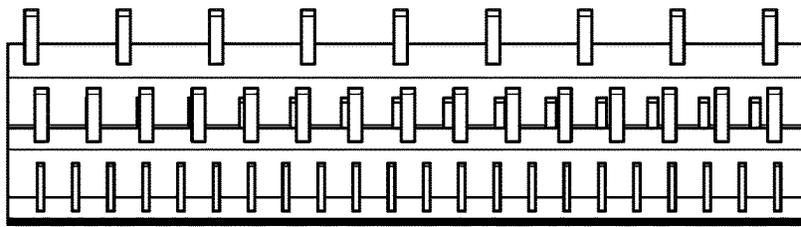


FIG. 10A

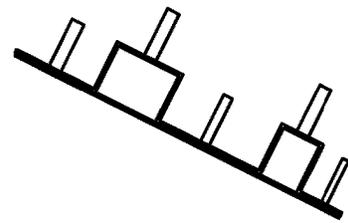


FIG. 10B

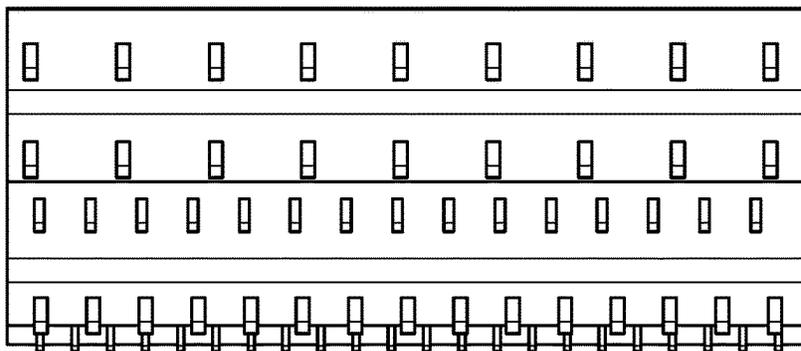


FIG. 10C




FIG. 10D

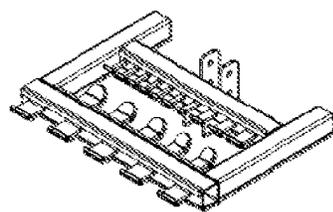


FIG. 10E



FIG. 10F

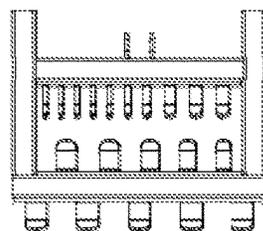


FIG. 10G

700, 208a, 208c

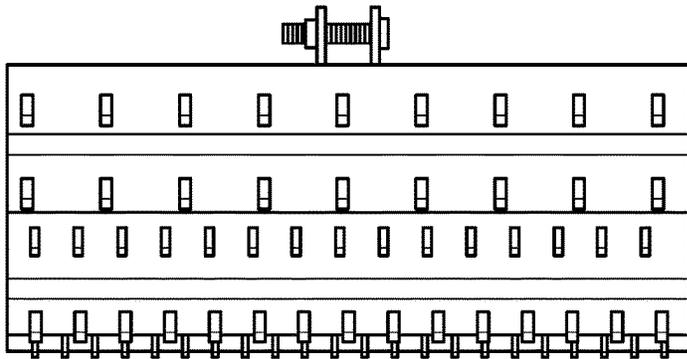


FIG. 11A

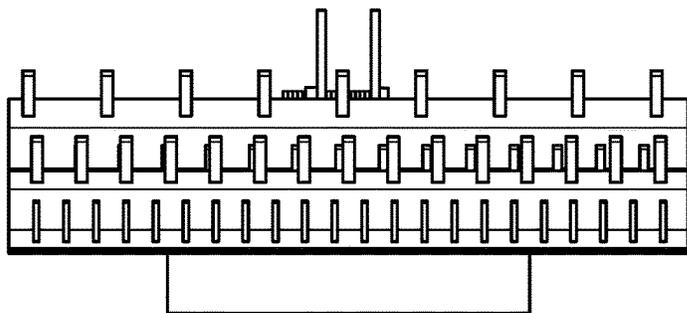


FIG. 11B

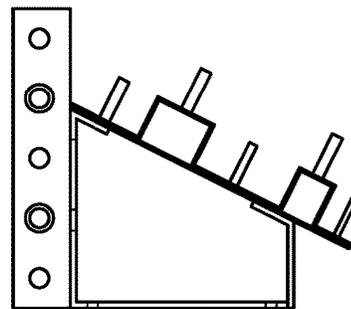


FIG. 11C

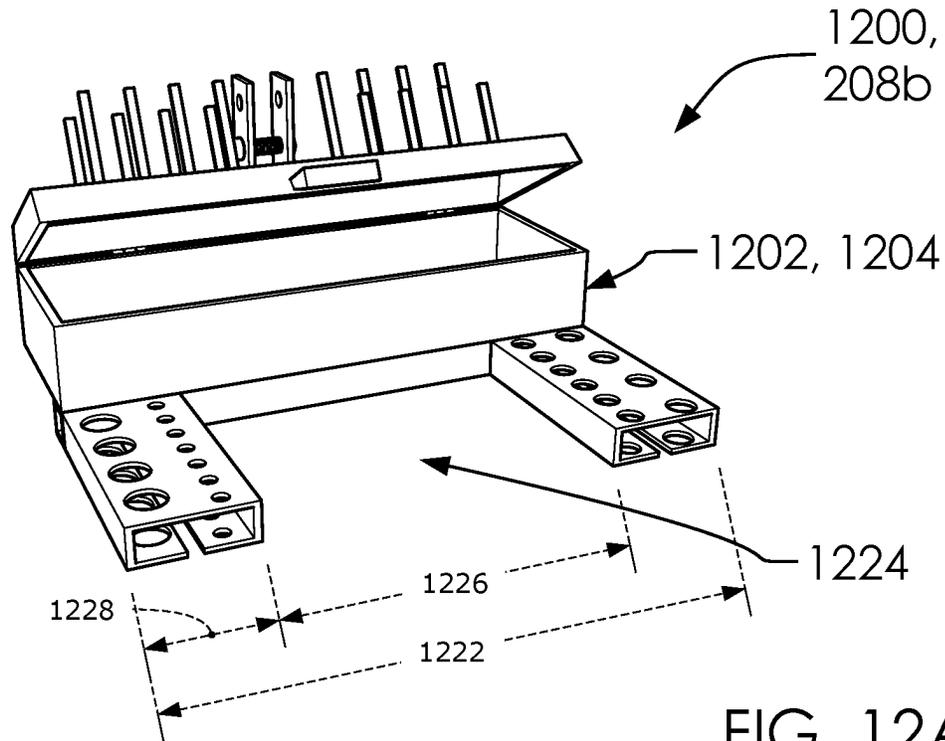


FIG. 12A

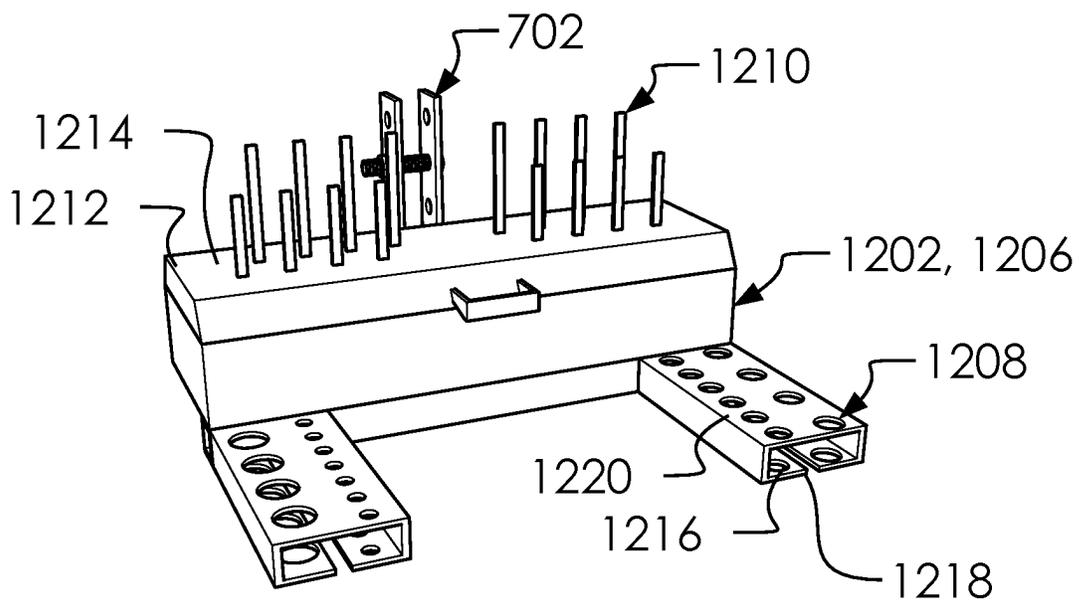


FIG. 12B

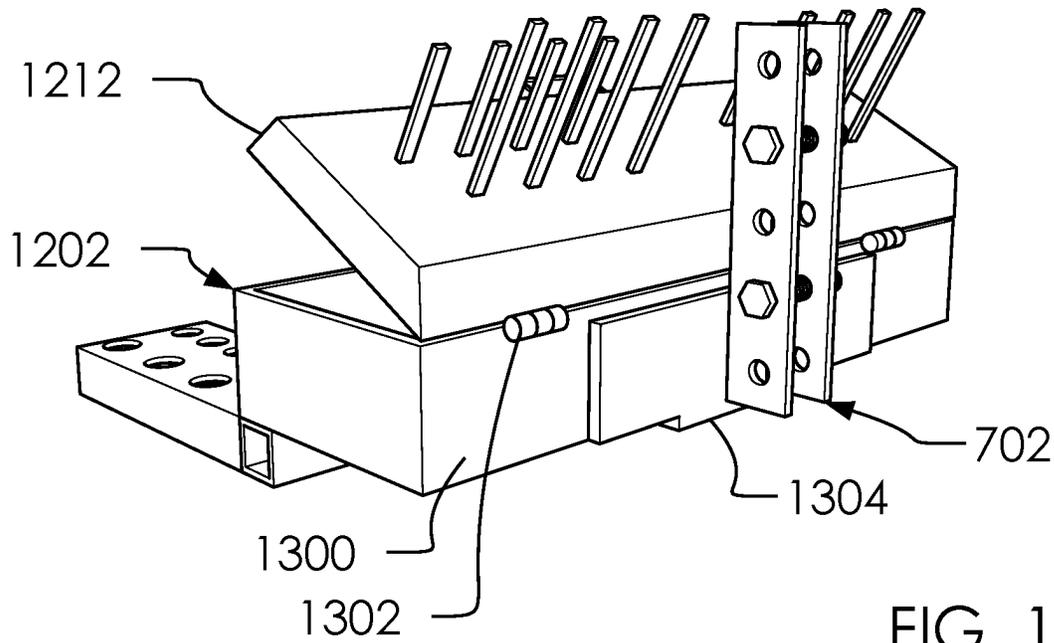


FIG. 13A

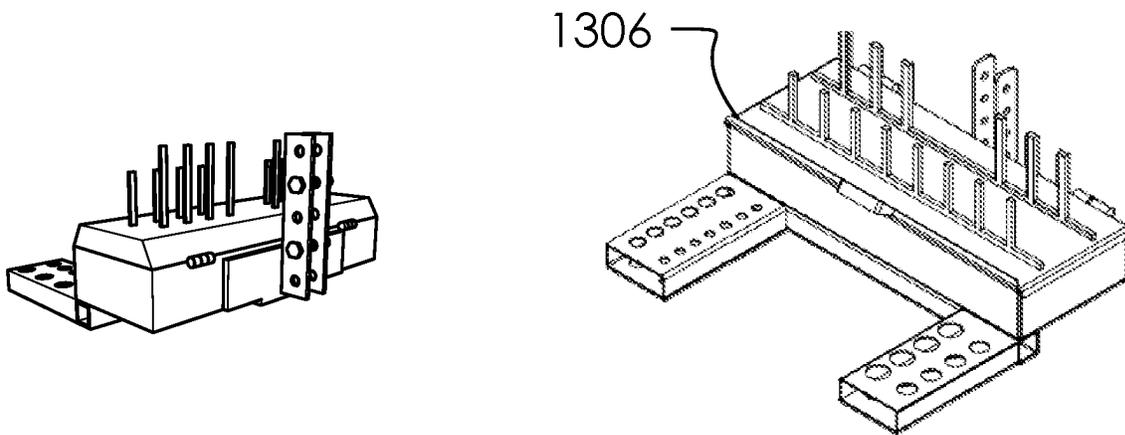


FIG. 13B

FIG. 13C

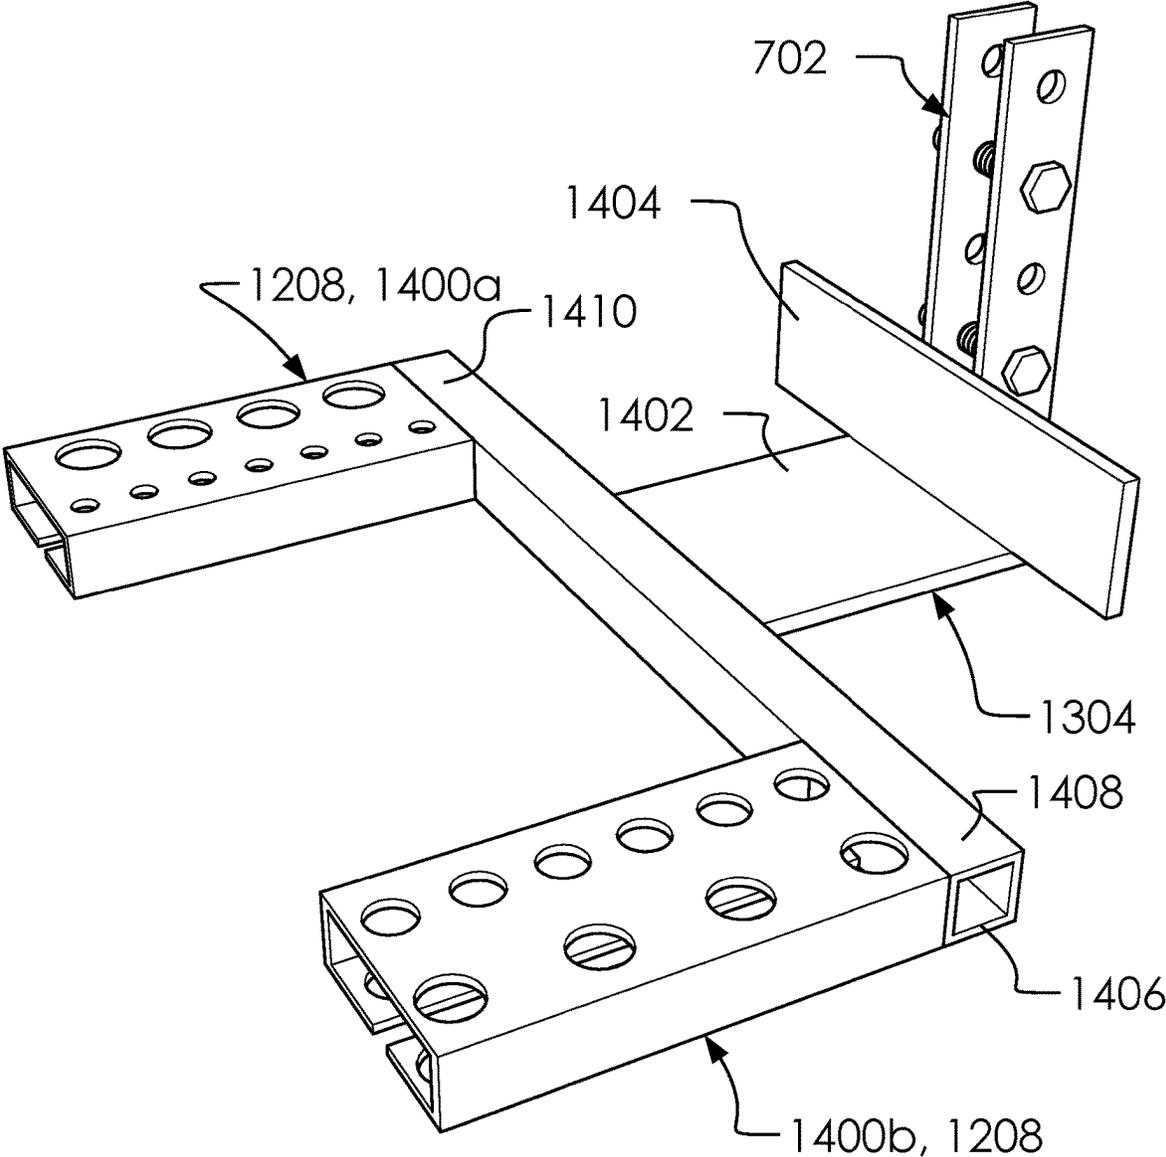


FIG. 14

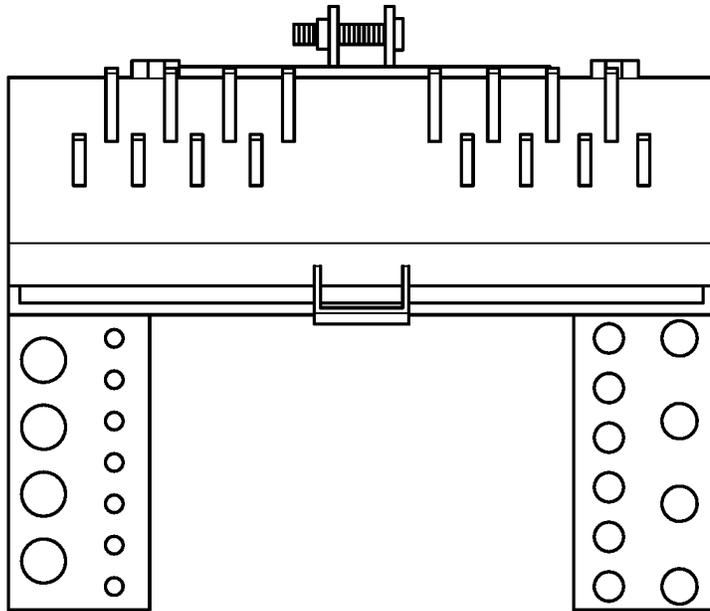


FIG. 15A

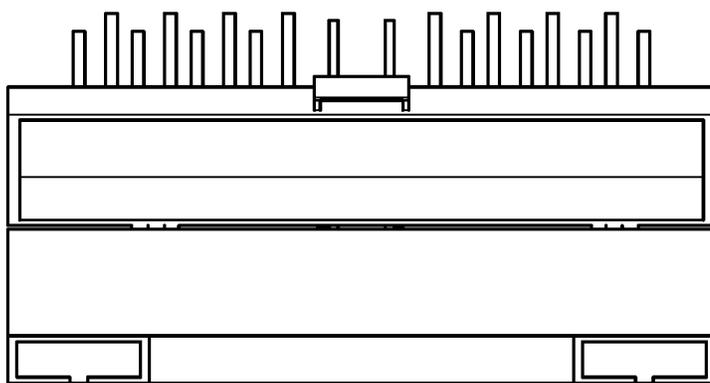


FIG. 15B

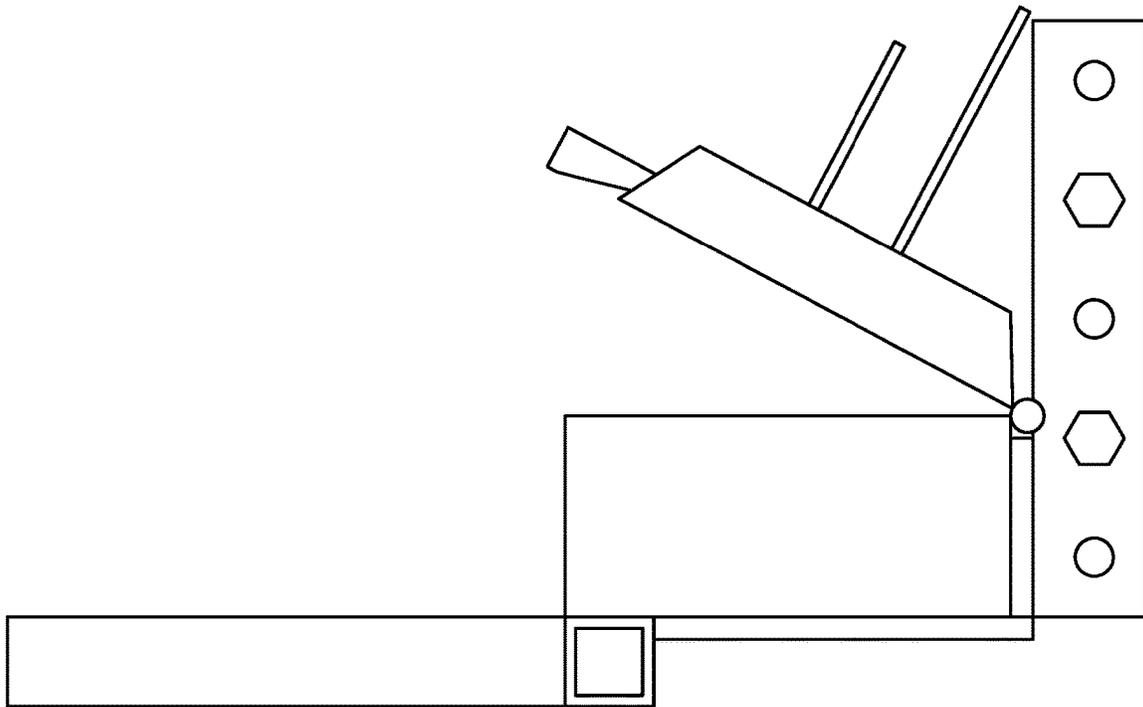


FIG. 16

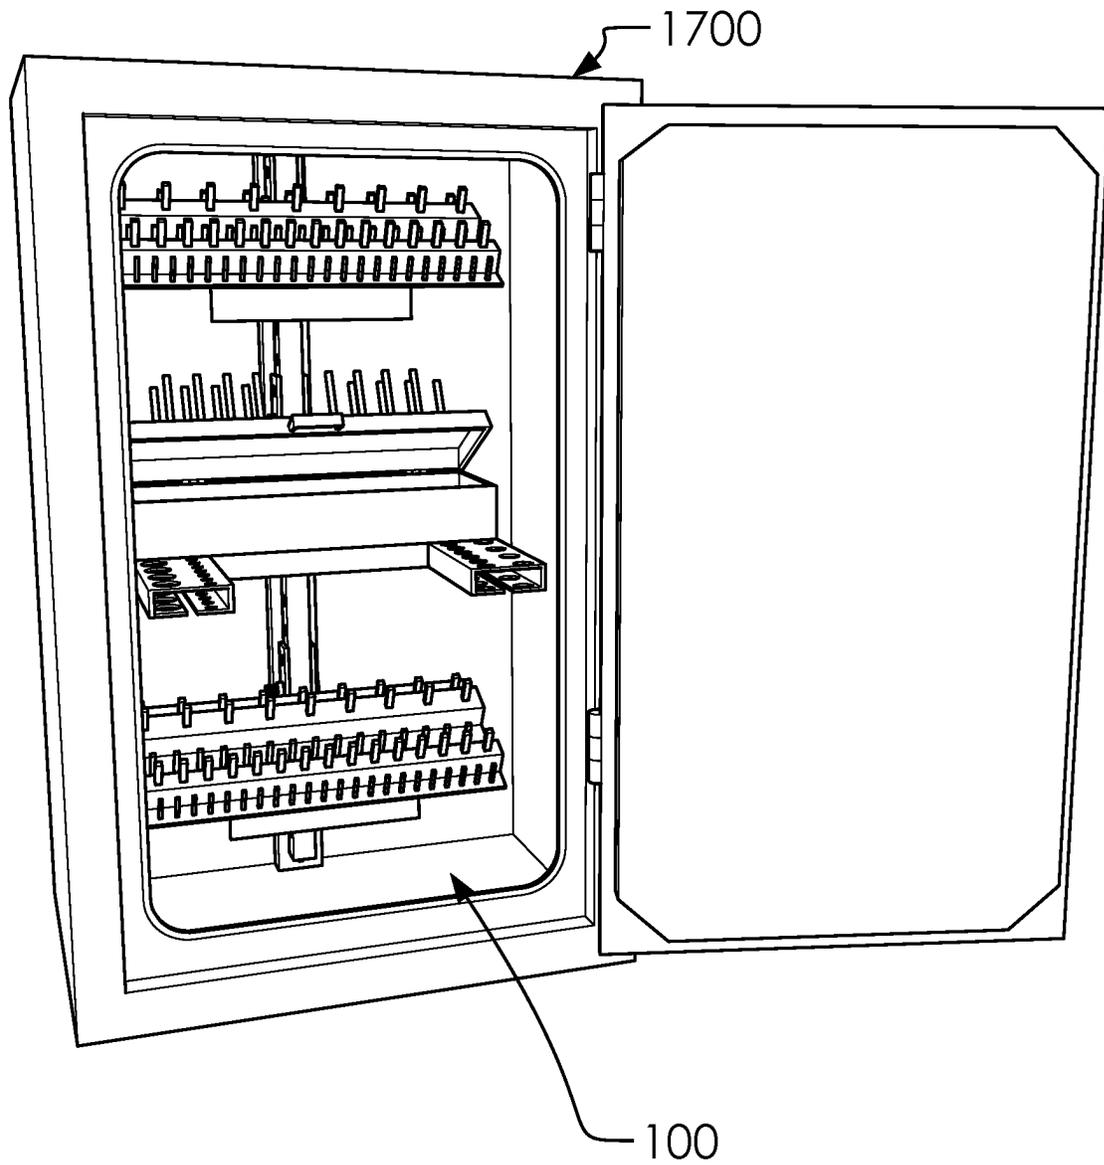


FIG. 17

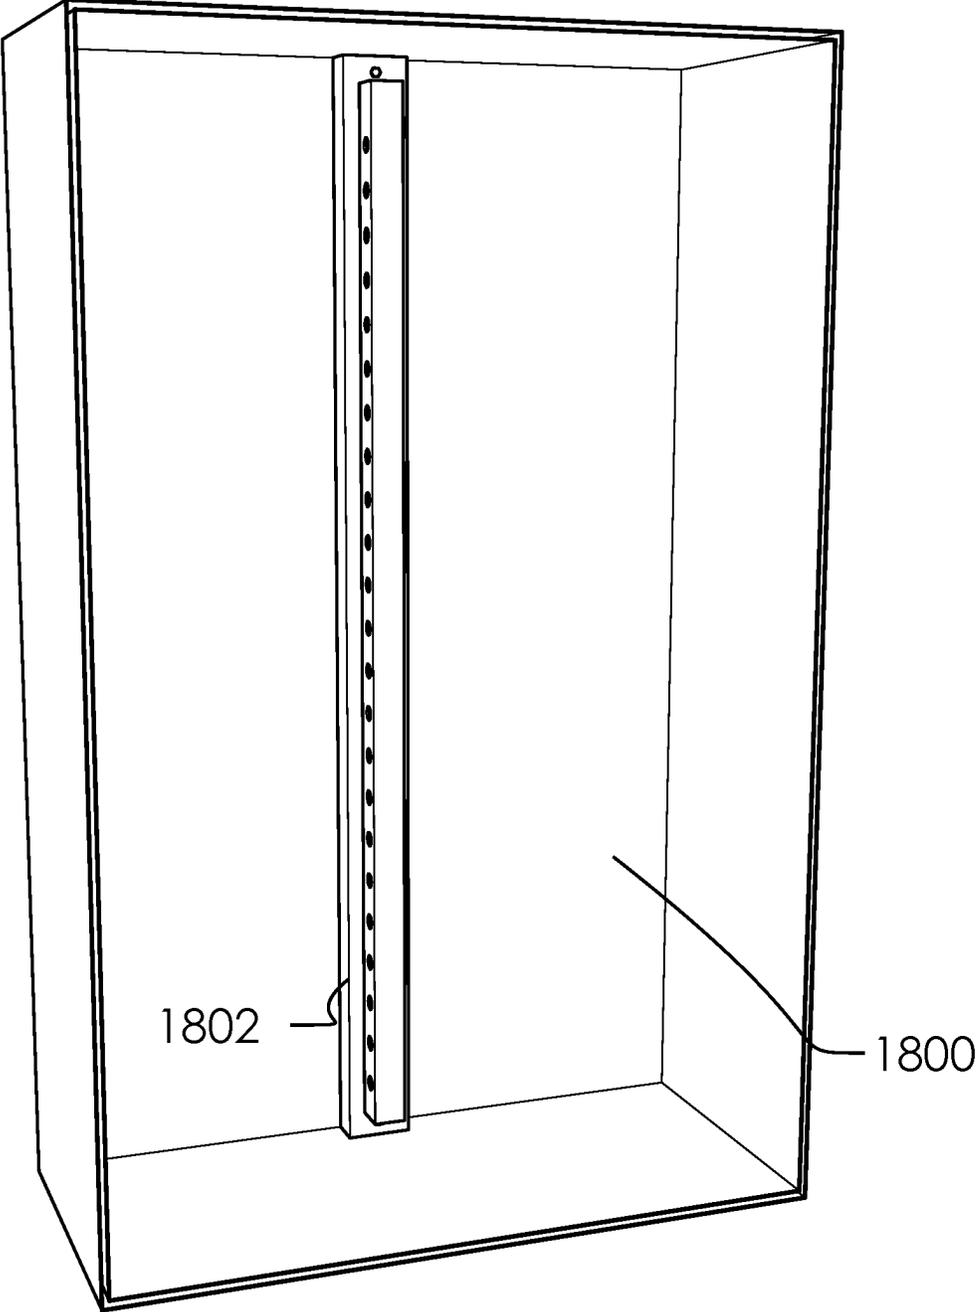


FIG. 18

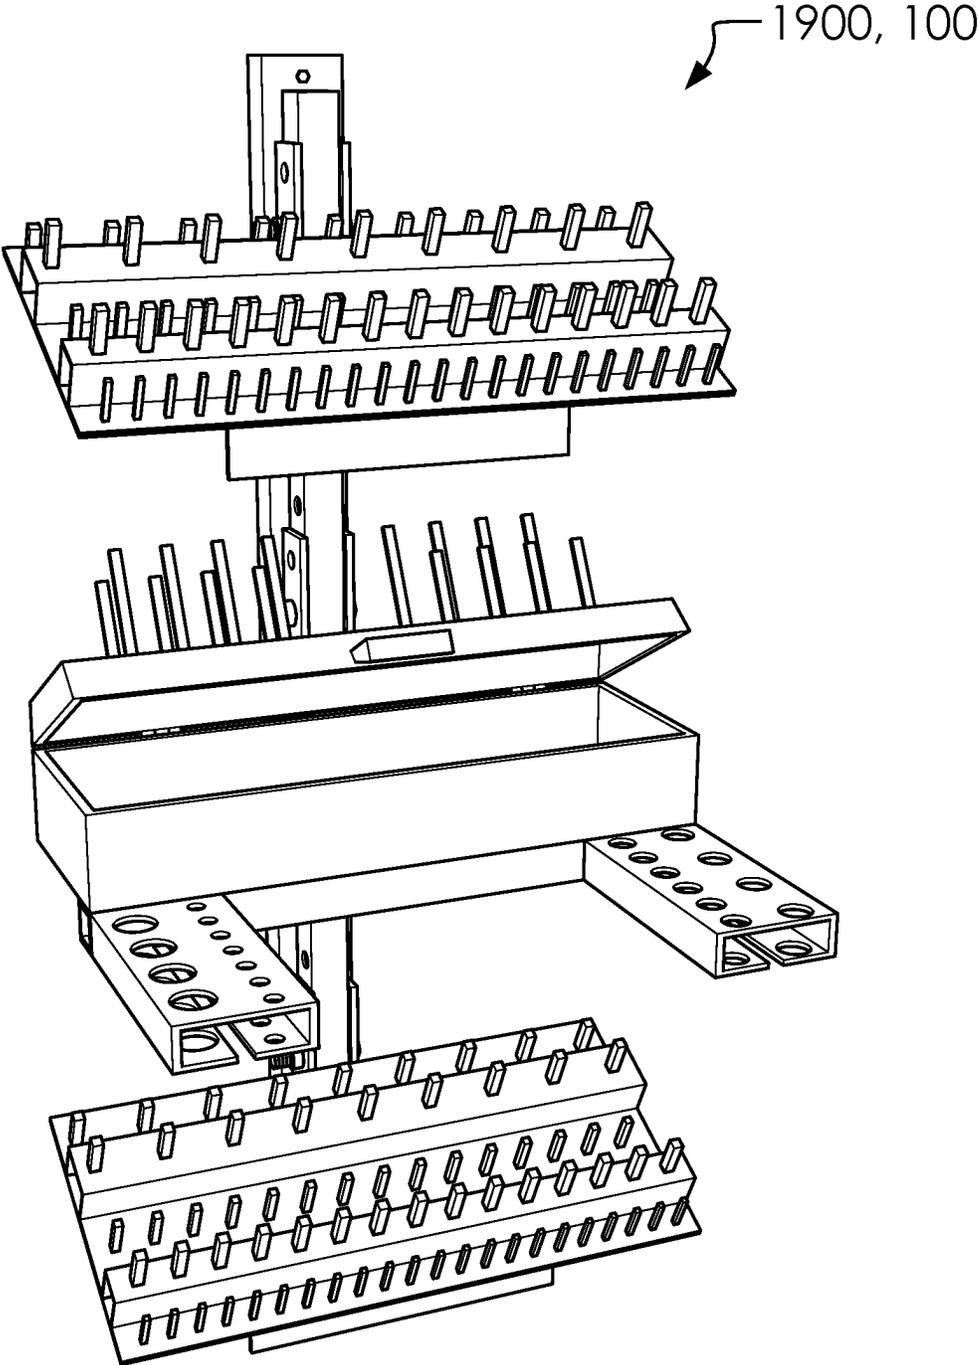


FIG. 19

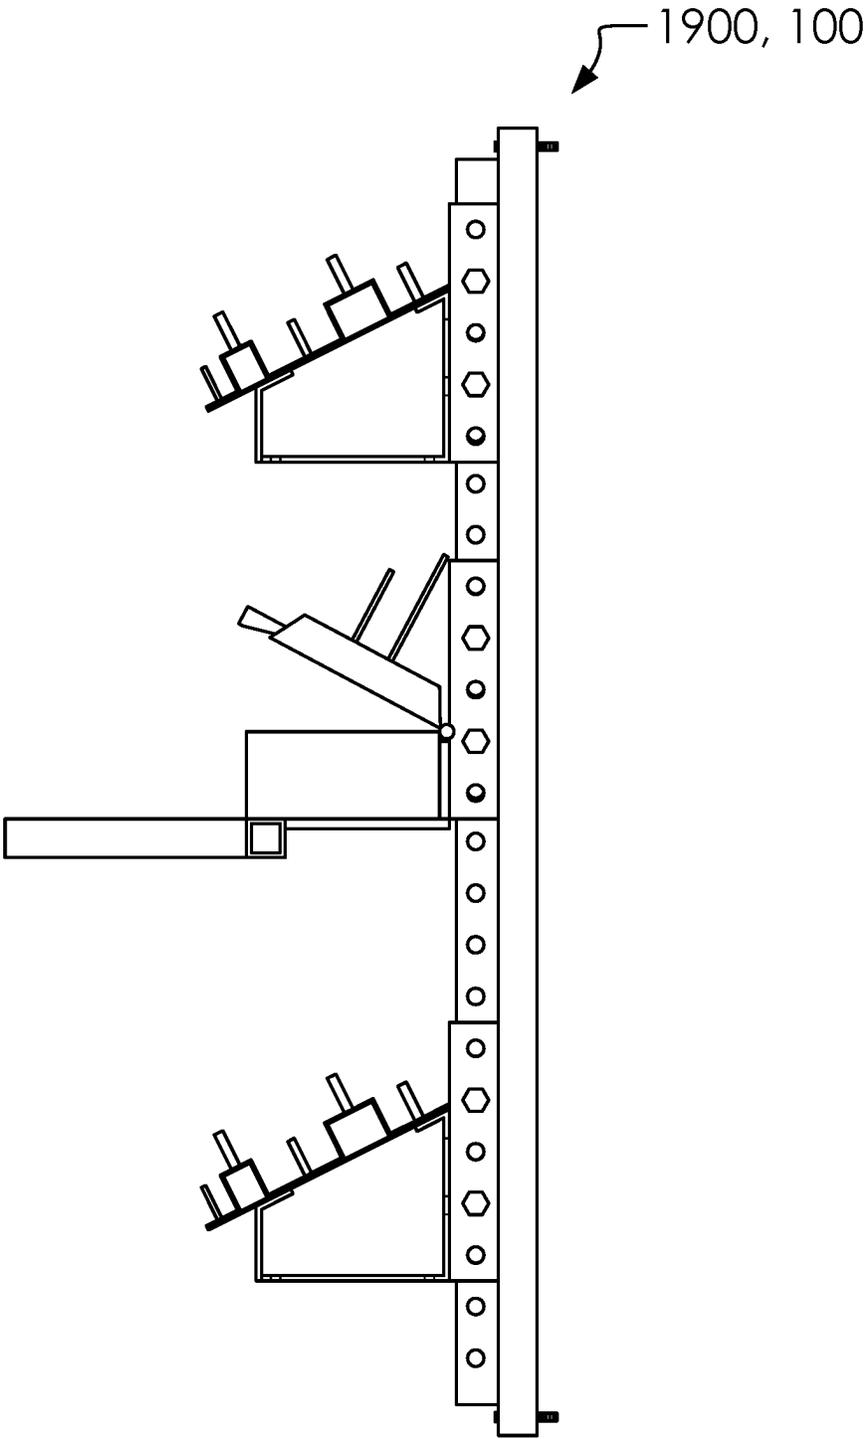


FIG. 20

1802

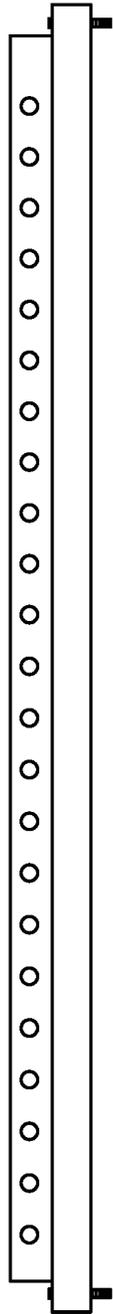


FIG. 21A




FIG. 21B

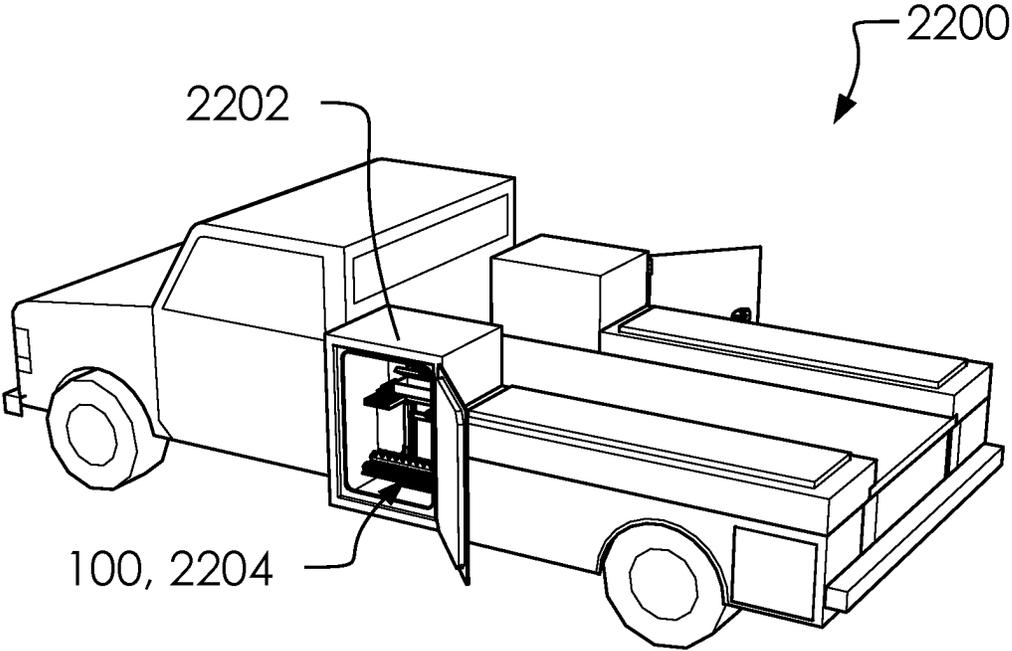


FIG. 22

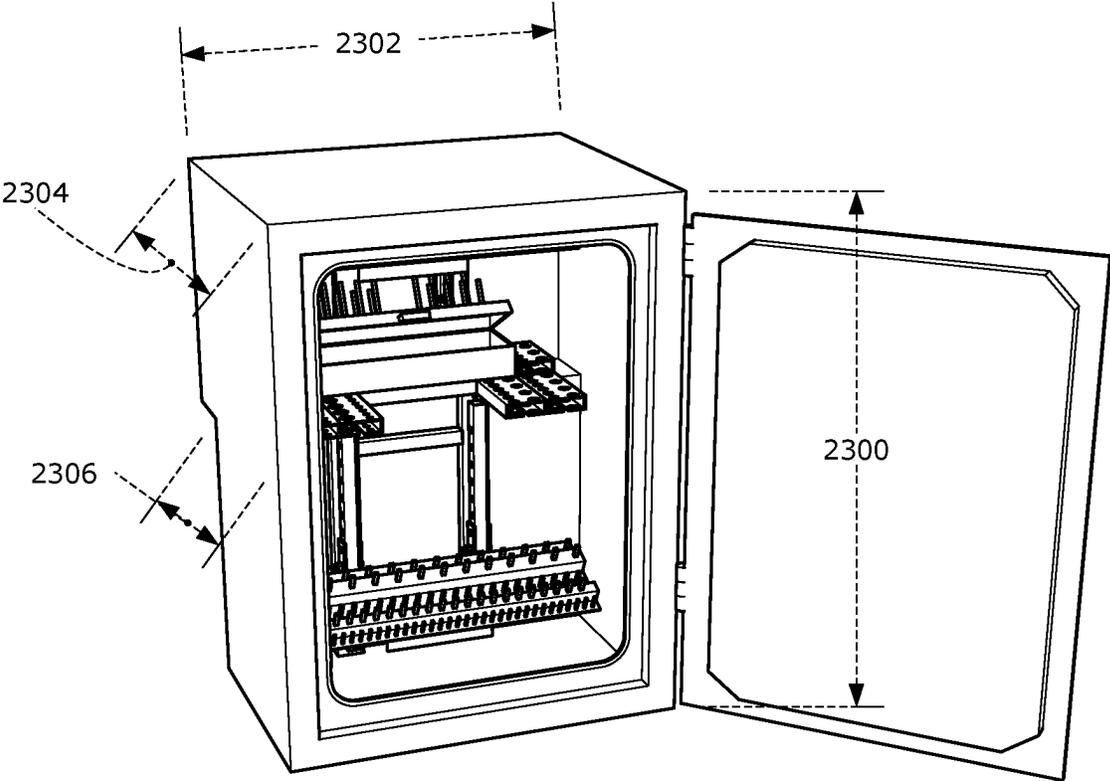


FIG. 23

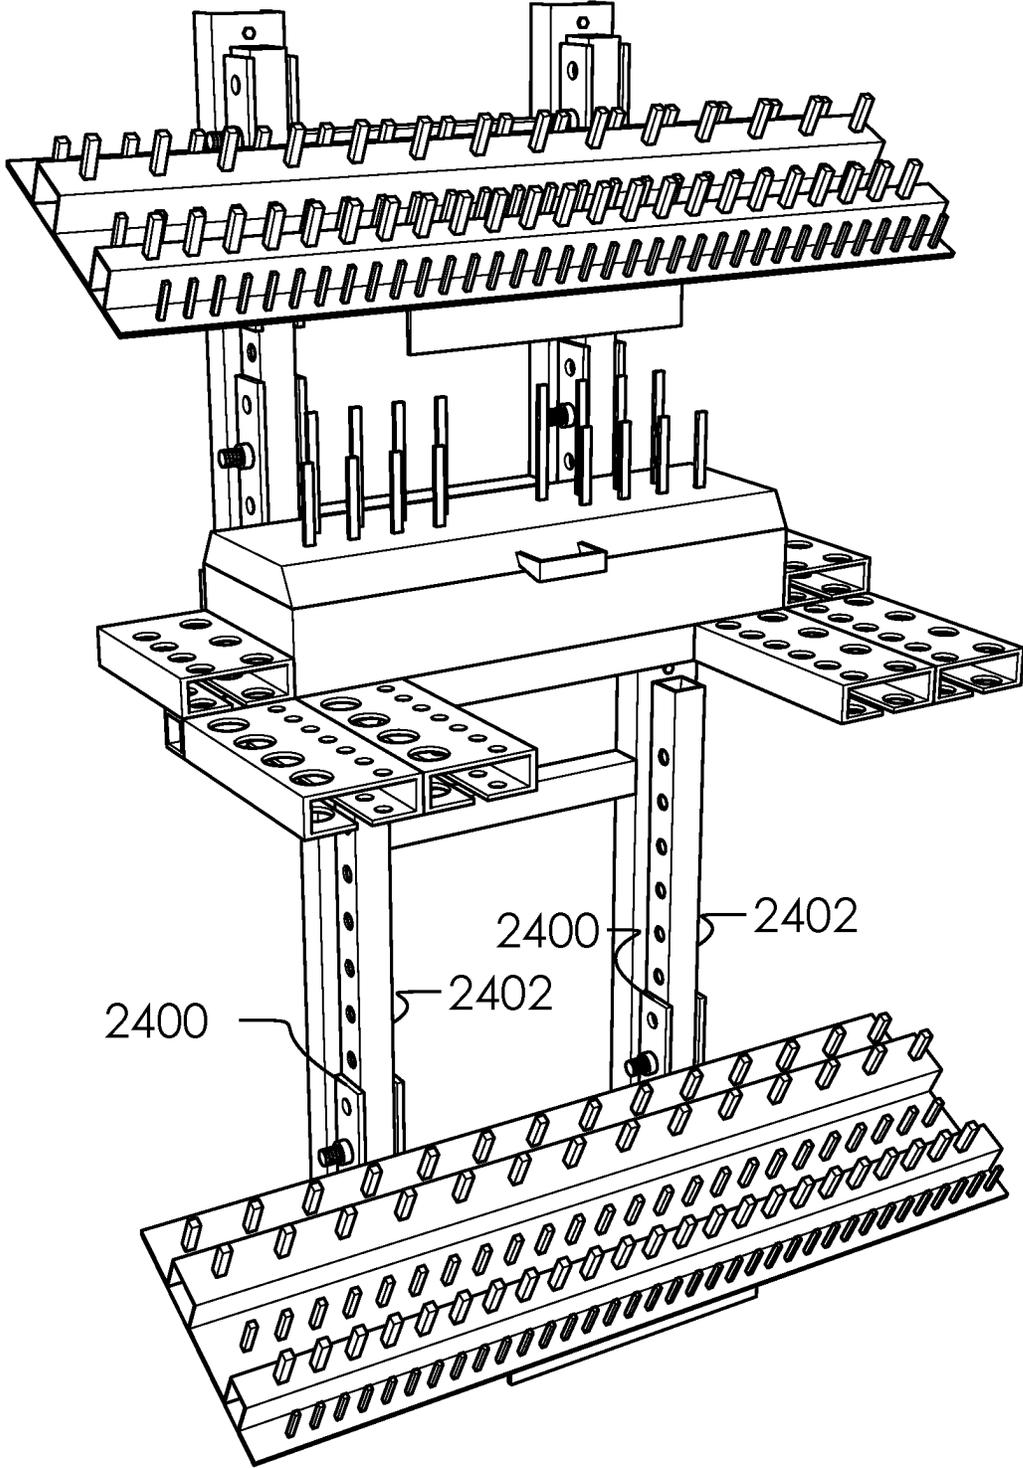


FIG. 24

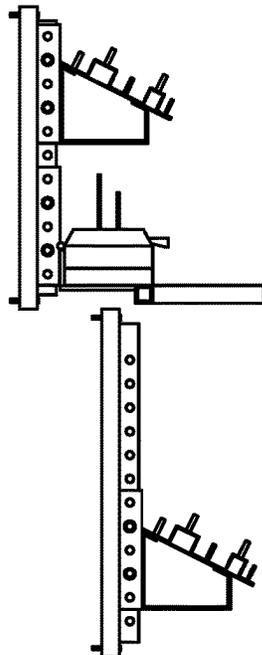


FIG. 25A

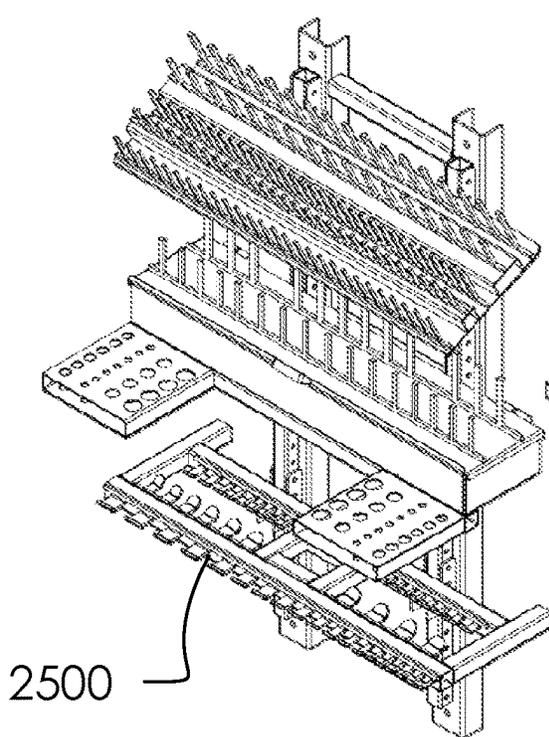


FIG. 25B

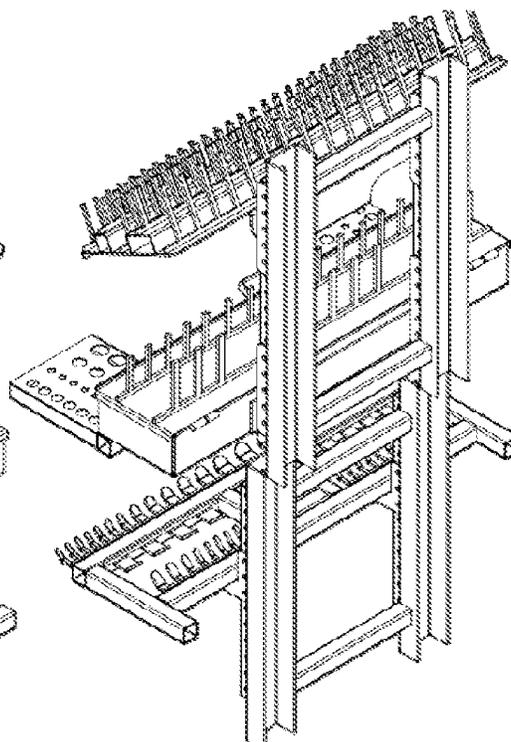


FIG. 25C

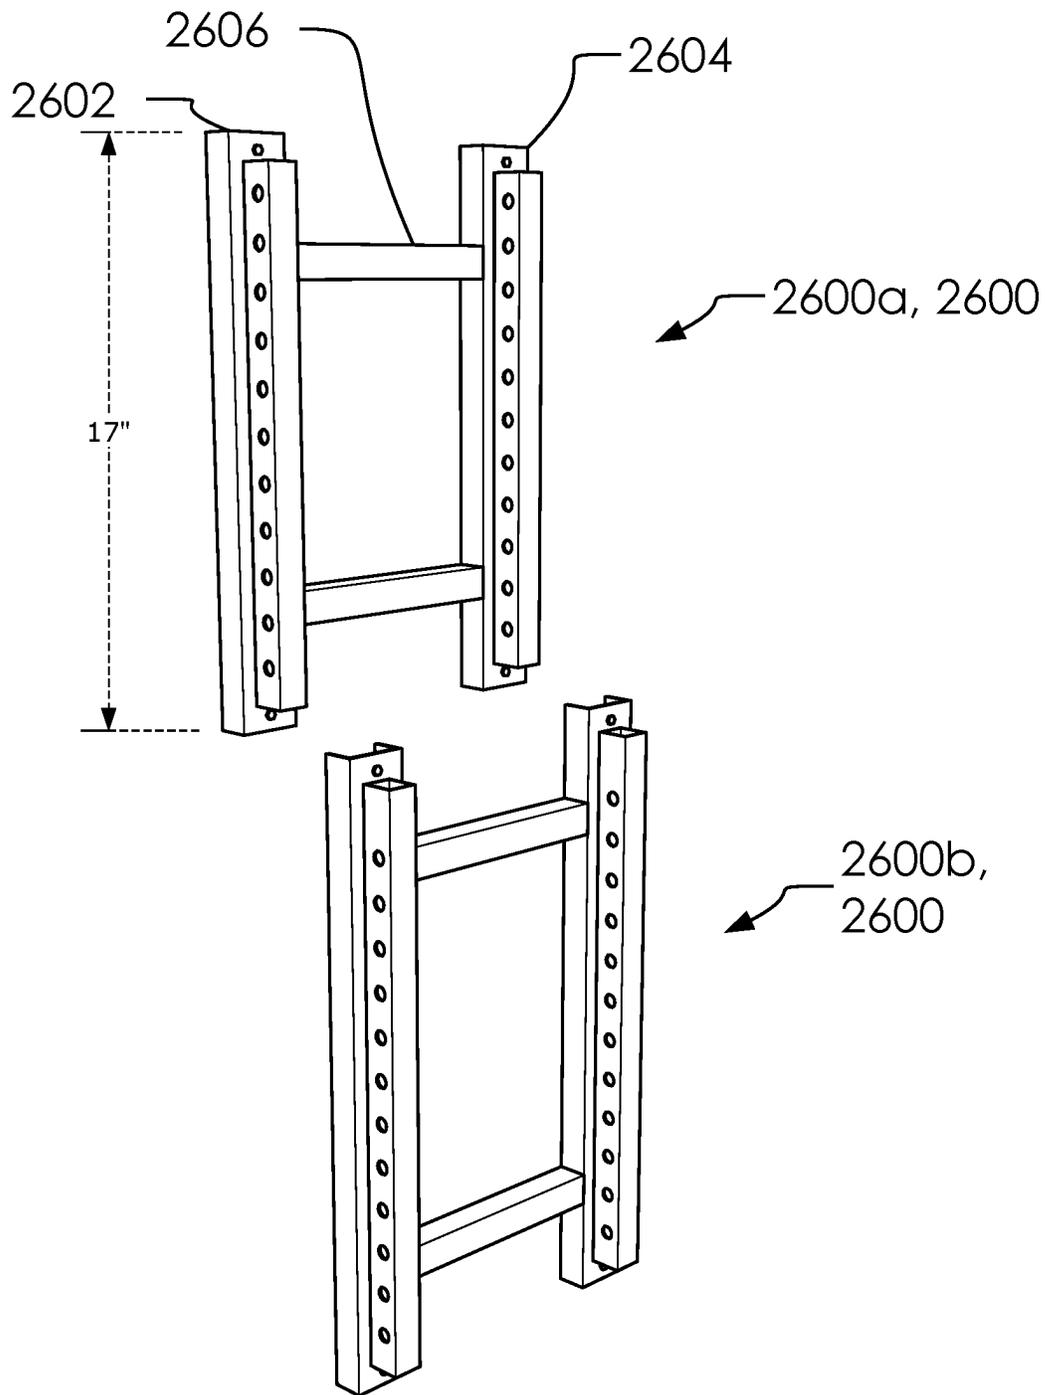


FIG. 26

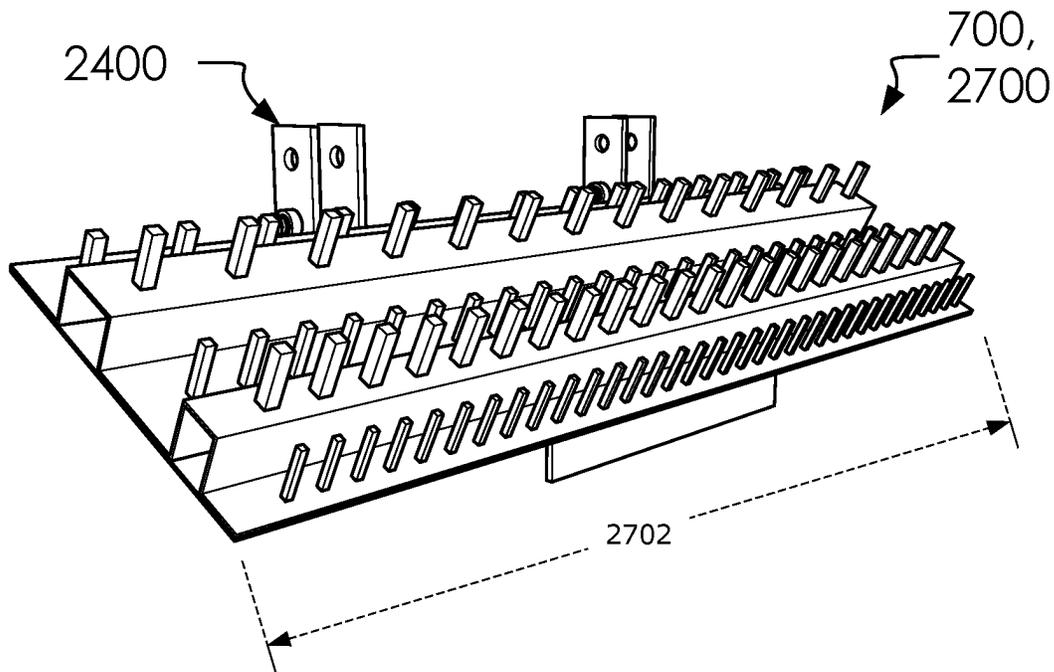


FIG. 27A

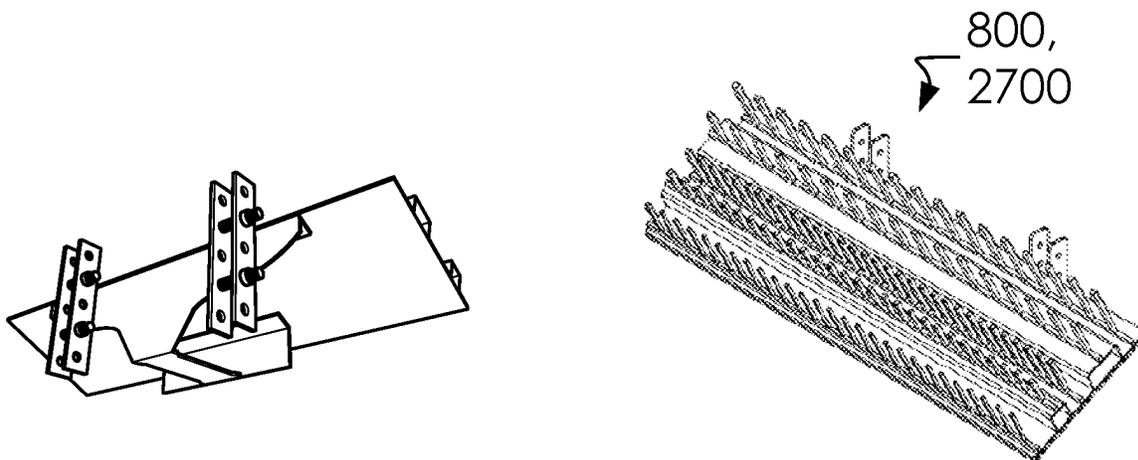


FIG. 27B

FIG. 27C

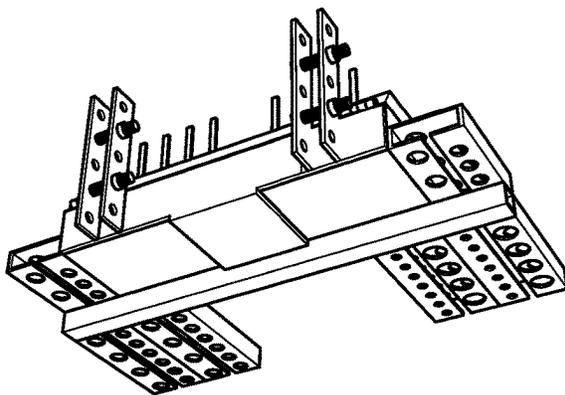
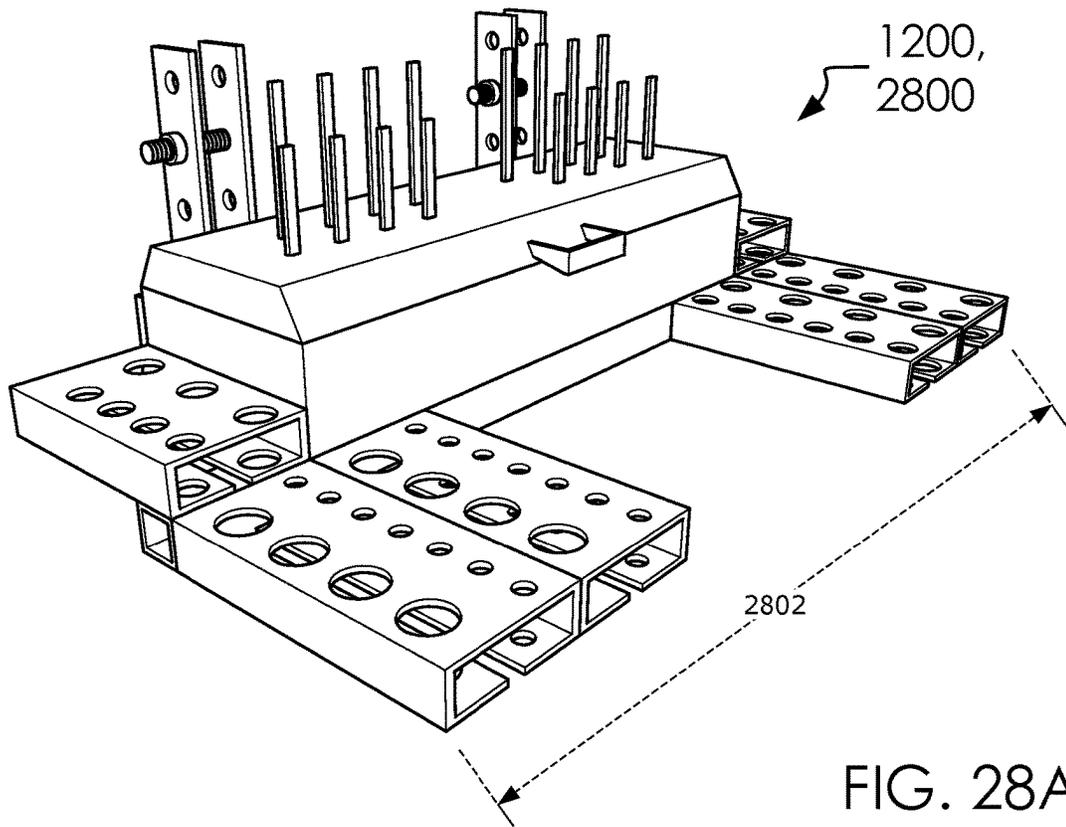


FIG. 28B

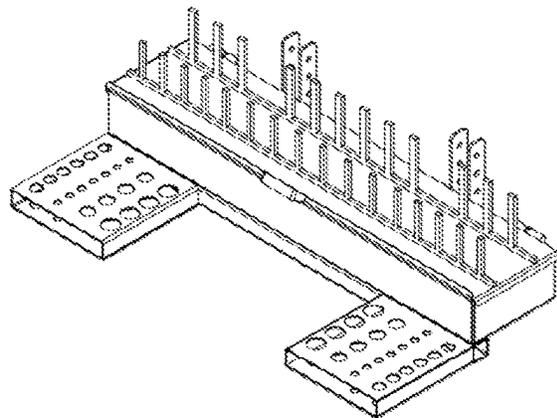


FIG. 28C

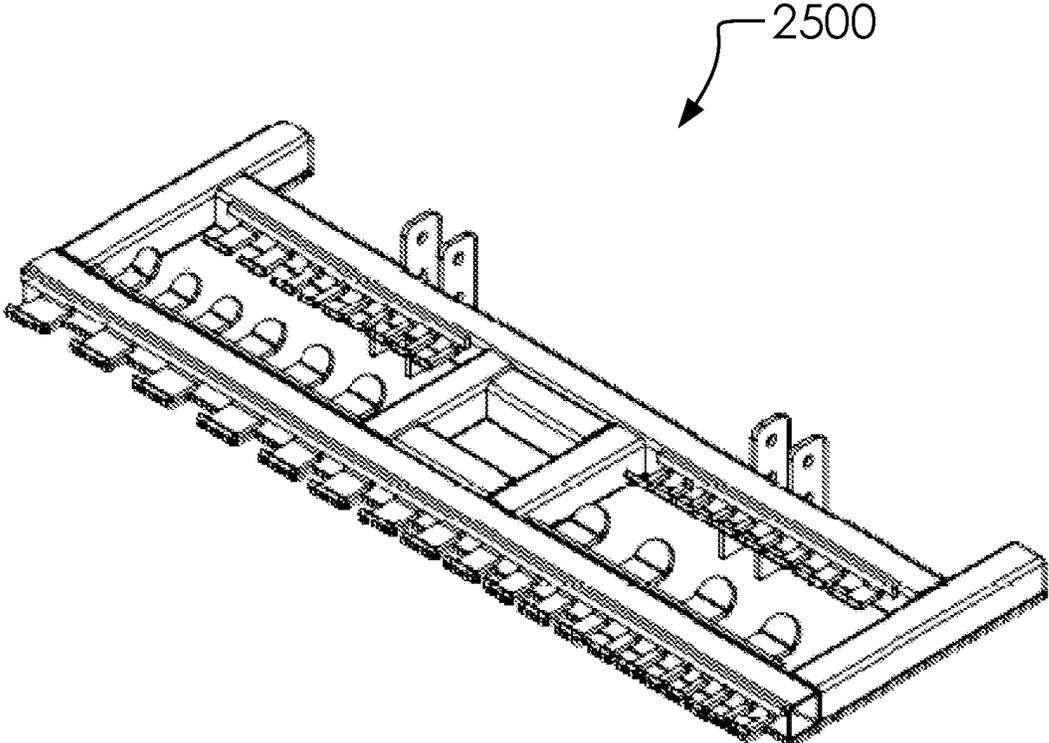


FIG. 29

TOOLBOX

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims benefit to U.S. patent application No. 63/008,433 filed on 2020 Apr. 10.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT (IF APPLICABLE)

Not applicable.

REFERENCE TO SEQUENCE LISTING, A TABLE, OR A COMPUTER PROGRAM LISTING COMPACT DISC APPENDIX (IF APPLICABLE)

Not applicable.

BACKGROUND OF THE INVENTION

Although not seen to anticipate the current system, examples of toolbox organizer systems known to the Applicant include: U.S. Pat. No. 6,619,772B2, U.S. Pat. No. 6,113,202A, 6,578,937B1, US20170057425A1, US20170182653A1, U.S. Pat. Nos. 5,740,883A, 9,914,209, and 5,125,518A.

As discussed below a toolbox accessory system **100** can have many advantages. One example comprises an arrangement of rails and accessory assemblies configured to maximize space utilization, versatility and safety within a utility box **104a** on a truck **102**.

BRIEF SUMMARY OF THE INVENTION

A toolbox accessory system for organizing and utilizing a utility box of a truck. Said toolbox accessory system comprises one or more rail assemblies attached to one or more back walls of said utility box. Said toolbox accessory system comprises one or more accessory assemblies configured to selectively attach to said one or more rail assemblies. Said one or more accessory assemblies are configured to selectively store tools within one or more utility boxes. Said one or more accessory assemblies are attached in a vertical configuration along said one or more back walls of said one or more utility boxes. A box shell comprises said one or more back walls, a top portion, a bottom portion, two side walls, and a front opening. Said one or more rail assemblies are arranged between said top portion and said bottom portion in a vertical configuration.

Said toolbox accessory system for organizing and utilizing said utility box of said truck. Said toolbox accessory system comprises said one or more rail assemblies attached to said one or more back walls of said utility box. Said toolbox accessory system comprises said one or more accessory assemblies configured to selectively attach to said one or more rail assemblies. Said one or more accessory assemblies are configured to selectively store tools within said one or more utility boxes. Said one or more accessory assemblies are attached in a vertical configuration along said one or more back walls of said one or more utility boxes. Said box shell comprises said one or more back walls, said top portion, said bottom portion, said two side walls, and said front opening. Said one or more rail assemblies are arranged between said top portion and said bottom portion in said vertical configuration. Said one or more back walls com-

prises a lower backwall and an upper backwall. Said lower backwall is set back a first depth and said upper backwall is set back a second depth. Said one or more back walls comprises a plurality of planar surfaces, as opposed to a single planar surface. Said one or more rail assemblies comprises a first rail assembly and a second rail assembly. Said first rail assembly attaches to said upper backwall and said second rail assembly is configured to attach to said lower backwall. Said one or more rail assemblies comprises at least a mounting rail. Said mounting rail comprises a width and a depth and a length. Said mounting rail is configured selectively attach to a portion of said one or more back walls and selectively receive and hold said one or more accessory assemblies. Said mounting rail comprises a side portion having one or more apertures. Said one or more apertures comprise at least a first aperture, and a second aperture. Said one or more accessory assemblies are configured to attach to said one or more apertures. each among said one or more accessory assemblies comprise a sliding bracket. Said sliding bracket is configured to selectively attach said one or more accessory assemblies to said one or more rail assemblies. Said sliding bracket comprises a first plate and a second plate arranged parallel to one another with one or more apertures for receiving and holding one or more fasteners. Said sliding bracket is configured to attach to said one or more rail assemblies by arranging said first plate and said second plate on either side of said mounting rail, and sliding a portion of said one or more fasteners through said one or more apertures in said first plate, a portion of said one or more apertures of said mounting rail, and said one or more apertures in said second plate.

Said toolbox accessory system for organizing and utilizing said utility box of said truck. Said toolbox accessory system comprises said one or more rail assemblies attached to said one or more back walls of said utility box. Said toolbox accessory system comprises said one or more accessory assemblies configured to selectively attach to said one or more rail assemblies. Said one or more accessory assemblies are configured to selectively store tools within said one or more utility boxes. Said one or more accessory assemblies are attached in a vertical configuration along said one or more back walls of said one or more utility boxes. Said box shell comprises said one or more back walls, said top portion, said bottom portion, said two side walls, and said front opening. Said one or more rail assemblies are arranged between said top portion and said bottom portion in said vertical configuration. Said toolbox accessory system comprises a wide configuration. Said wide configuration comprises said one or more accessory assemblies with wide configurations. A pegged tool holder assembly and a toolbox accessory assembly comprises two sliding brackets and a greater width for said wide configuration. Likewise, said one or more rail assemblies comprises a two parallel rails aligned on said one or more back walls for holding said one or more accessory assemblies. Said two parallel rails is split similar to said first rail assembly and said second rail assembly attached to said lower backwall and said upper backwall. Said two parallel rails comprises one or more sets of rails. Said one or more sets of rails comprises a first set of rails, and a second set of rails. each of said one or more sets of rails comprises a first rail and a second rail, arranged in parallel and with one or more support bars arranged between one another. Said one or more rail assemblies comprises at least said mounting rail. Said mounting rail comprises said width and said depth and said length. Said mounting rail is configured selectively attach to a portion of said one or more back walls and selectively receive and hold

said one or more accessory assemblies. Said mounting rail comprises said side portion having said one or more apertures. Said one or more apertures comprise at least said first aperture, and said second aperture. Said one or more accessory assemblies are configured to attach to said one or more apertures. Said one or more rail assemblies comprises a backing portion, and one or more fasteners. Said backing portion comprises a width, a length, and a depth. Said backing portion is attached to said mounting rail by welding the two parts together. Said one or more rail assemblies are configured to selectively attach to portions of said one or more back walls by attaching said mounting rail to said backing portion, and selectively attaching said backing portion to said one or more back walls with said one or more fasteners.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

FIG. 1 illustrates a perspective overview of a toolbox accessory system **100** mounted on a truck **102**.

FIG. 2 illustrates a perspective overview of a utility box **104a**, with a door **200**, in an open configuration **218**.

FIG. 3 illustrates a perspective cross-section view of said utility box **104a** with one or more rail assemblies **206** mounted on one or more back walls **204**.

FIGS. 4A and 4B illustrate a perspective overview and an elevated top view of a first rail assembly **206a**.

FIGS. 5A, 5B, and 5C illustrate a perspective overview of said one or more rail assemblies **206** with one or more accessory assemblies **208**.

FIG. 6 illustrates an elevated side view of said one or more rail assemblies **206** with said one or more accessory assemblies **208**.

FIGS. 7A and 7B illustrate a perspective overview and lower side view of a pegged tool holder assembly **700**.

FIGS. 8A and 8B illustrate a perspective overview and lower side view of a sliding bracket **702** and a support bracket **704**.

FIGS. 8C and 8D illustrate a perspective overview and top side view a pegged tool holder assembly **800**.

FIGS. 9A, 9B, 9C, and 9D illustrate an elevated frontside, first side, top side and first sideview of said sliding bracket **702** and said support bracket **704**.

FIGS. 10A, 10B and 10C illustrate an elevated frontside, first side, and top side view of a peg board **706**.

FIGS. 10D, 10E, 10F, and 10G illustrate an elevated frontside, perspective overview, elevated first side, and top side view of a tabbed accessory assembly **1000**.

FIGS. 11A, 11B and 11C illustrate an elevated frontside, first side, and top side view of said pegged tool holder assembly **700**.

FIGS. 12A and 12B illustrate a perspective overview of a toolbox accessory assembly **1200**.

FIGS. 13A, 13B, and 13C illustrate two perspective rear views and a perspective overview of said toolbox accessory assembly **1200** with a box **1202** in an open configuration **1204** and a closed configuration **1206**.

FIG. 14 illustrates a perspective overview of said sliding bracket **702**, a support bracket **1304** and one or more slotted plates **1208**.

FIGS. 15A and 15B illustrate an elevated top and front view of said toolbox accessory assembly **1200**.

FIG. 16 illustrates an elevated side view of said toolbox accessory assembly **1200**.

FIG. 17 illustrates a perspective overview of said toolbox accessory system **100** in a flat backed box configuration **1700**.

FIG. 18 illustrates a cross-section view of said flat backed box configuration **1700** with a flat back interior surface **1800** and a single rail assembly **1802**.

FIGS. 19 and 20 illustrate a perspective overview and elevated side view of said one or more accessory assemblies **208** attached to said single rail assembly **1802** in a stacked configuration **1900**, respectively.

FIGS. 21A and 21B illustrate an elevated side and front view of said single rail assembly **1802**.

FIG. 22 illustrates a perspective overview of a long bed truck **2200**.

FIG. 23 illustrates a perspective overview of a wide utility box configuration **2202**.

FIGS. 24 and 25A illustrate a perspective overview and an elevated side view of a wide configuration **2204** of said toolbox accessory system **100**, respectively.

FIGS. 25B, and 25C illustrate a perspective overview of said wide configuration **2204** comprising a drive socket holder assembly **2500**.

FIG. 26 illustrates a perspective overview a two parallel rails **2402**.

FIGS. 27A, 27B, and 27C illustrate a perspective overview and lower back side view of said pegged tool holder assembly **700** and said pegged tool holder assembly **800** in a wide configuration **2700**.

FIGS. 28A, 28B, and 28C illustrate a perspective overview, lower back side view, and a perspective overview of said toolbox accessory assembly **1200** in a wide configuration **2800**.

FIG. 29 illustrates a perspective overview of said drive socket holder assembly **2500**.

DETAILED DESCRIPTION OF THE INVENTION

The following description is presented to enable any person skilled in the art to make and use the invention as claimed and is provided in the context of the particular examples discussed below, variations of which will be readily apparent to those skilled in the art. In the interest of clarity, not all features of an actual implementation are described in this specification. It will be appreciated that in the development of any such actual implementation (as in any development project), design decisions must be made to achieve the designers' specific goals (e.g., compliance with system- and business-related constraints), and that these goals will vary from one implementation to another. It will also be appreciated that such development effort might be complex and time-consuming, but would nevertheless be a routine undertaking for those of ordinary skill in the field of the appropriate art having the benefit of this disclosure. Accordingly, the claims appended hereto are not intended to be limited by the disclosed embodiments, but are to be accorded their widest scope consistent with the principles and features disclosed herein.

FIG. 1 illustrates a perspective overview of a toolbox accessory system **100** mounted on a truck **102**.

In one embodiment, said truck **102** can comprise one or more utility boxes **104** (which can comprise a utility box **104a**, and a second utility box **104b**).

In one embodiment, said toolbox accessory system **100** can organize said one or more utility boxes **104**.

Said truck **102** can comprise a flat floor **106** at a rear portion of said truck **102**. In one embodiment, said one or more utility boxes **104** can attach to a side portion of said flat floor **106**.

In one embodiment, said truck **102** can comprise a flatbed truck, as is known in the art.

FIG. **2** illustrates a perspective overview of said utility box **104a**, with a door **200**, in an open configuration **218**.

In one embodiment, said one or more utility boxes **104** can comprise a compartment **202**, a box shell **220**, one or more back walls **204**, a front opening **210**, a height **212**, a depth **214**, and a width **216**. In one embodiment said one or more back walls **204** can comprise one or more interior walls of said one or more utility boxes.

In one embodiment, said toolbox accessory system **100** can selectively mount one or more accessory assemblies **208** (which can comprise a first accessory assembly **208a**, a second accessory assembly **208b**, and a third accessory assembly **208c**) on one or more rail assemblies **206** (which can comprise a first rail assembly **206a**, and a second rail assembly **206b**).

In one embodiment, said utility box **104a** can comprise said door **200** and said box shell **220** substantially enclosing said compartment **202**.

FIG. **3** illustrates a perspective cross-section view of said utility box **104a** with said one or more rail assemblies **206** mounted on said one or more back walls **204**.

In one embodiment, said one or more back walls **204** can comprise a lower backwall **300** and an upper backwall **302**, as illustrated. In one embodiment, said lower backwall **300** can be set back a first depth **304** and said upper backwall **302** can be set back a second depth **306**.

In one embodiment, said one or more back walls **204** can comprise a plurality of planar surfaces, as opposed to a single planar surface, as a consequence of constructing said box shell **220** to fit on said truck **102**. For example, as illustrated in FIG. **1**, said one or more utility boxes **104** can attach to a side portion of said flat floor **106**, and a horizontal shelf **308** between said one or more back walls **204** can be set substantially on and attach to said flat floor **106**. Accordingly, where said one or more back walls **204** comprise said lower backwall **300** and said upper backwall **302**, said one or more rail assemblies **206** can comprise said first rail assembly **206a** and said second rail assembly **206b**; wherein, said first rail assembly **206a** can attach to said upper backwall **302** and said second rail assembly **206b** can attach to said lower backwall **300**.

Said box shell **220** can comprise said one or more back walls **204**, a top portion **310**, a bottom portion **312**, two side walls **314**, and said front opening **210**.

Said one or more rail assemblies **206** can be arranged between said top portion **310** and said bottom portion **312** in a vertical configuration **316**.

FIGS. **4A** and **4B** illustrate a perspective overview and an elevated top view of said first rail assembly **206a**.

In one embodiment, said one or more rail assemblies **206** can comprise a mounting rail **402**, and one or more fasteners **404**. Said mounting rail **402** can comprise a width **412** and a depth **414**, which can comprise 1" by 1", and a length **416**. In one embodiment, said mounting rail **402** can be configured selectively attach to a portion of said one or more back walls **204** and selectively receive and hold said one or more accessory assemblies **208**.

In one embodiment, said one or more rail assemblies **206** can comprise a backing portion **400**. Said backing portion **400** can comprise a u-shaped bracket having a width **406**, a length **408**, and a depth **410**. In one embodiment, said

backing portion **400** can be attached to said mounting rail **402** by welding the two parts together. Accordingly, said mounting rail **402** can selectively attach to portions of said one or more back walls **204** by attaching said mounting rail **402** to said backing portion **400**, and selectively attaching said backing portion **400** to said one or more back walls **204** with said one or more fasteners **404**, as illustrated.

In one embodiment, said length **416** of said mounting rail **402** can be shorter than said length **408** of said backing portion **400**, leaving space on said backing portion **400** to have said one or more fasteners **404** at a first end **418** and a second end **420** of said backing portion **400**, as illustrated.

In one embodiment, said mounting rail **402** can comprise one or more apertures **422** (which can comprise a first aperture **422a**, and a second aperture **422b**) on a side portion **424** of said mounting rail **402**.

FIGS. **5A**, **5B**, and **5C** illustrate a perspective overview of said one or more rail assemblies **206** with said one or more accessory assemblies **208**.

In one embodiment, said one or more accessory assemblies **208** can selectively attach to said one or more rail assemblies **206** for arrangement and access within said one or more utility boxes **104**.

FIG. **6** illustrates an elevated side view of said one or more rail assemblies **206** with said one or more accessory assemblies **208**.

As here, said one or more rail assemblies **206** can be split to attach to said lower backwall **300** and said upper backwall **302**; wherein, said one or more accessory assemblies **208** can be attached to either of said one or more rail assemblies **206**, rather than in one stack.

FIGS. **7A** and **7B** illustrate a perspective overview and lower side view of a pegged tool holder assembly **700**.

In one embodiment, each among said one or more accessory assemblies **208** can comprise a sliding bracket **702**.

In one embodiment, each among said one or more accessory assemblies **208** can comprise a support bracket **704**. Said sliding bracket **702** can selectively attach to said one or more rail assemblies **206**, and said support bracket **704** can attach to said sliding bracket **702**. In one embodiment, said support bracket **704** can extend horizontally out from said sliding bracket **702** and support an accessory portion **802** of said one or more accessory assemblies **208**. In one embodiment, said accessory portion **802** can comprise useful parts of said one or more accessory assemblies **208** for organizing tools or objects within said one or more utility boxes **104**, such as plurality of pegs **708**.

In one embodiment, a portion of said one or more accessory assemblies **208** can comprise said pegged tool holder assembly **700**. For example, both said first accessory assembly **208a** and said third accessory assembly **208c** can comprise said pegged tool holder assembly **700**. Said pegged tool holder assembly **700** can comprise said sliding bracket **702**, said support bracket **704** and a peg board **706**. Said peg board **706** can comprise said plurality of pegs **708** arranged on one or more raised planes **710**.

Said sliding bracket **702** can comprise a first plate **712** and a second plate **714** arranged parallel to one another with one or more apertures **716** for receiving and holding one or more fasteners **718**.

Said sliding bracket **702** can attach to a backside **720** of said support bracket **704**, and said peg board **706** can attach to a top face **722** of said support bracket **704**. In one embodiment, said sliding bracket **702** is attached to said support bracket **704** by welding. In one embodiment, said peg board **706** is attached to said support bracket **704** by one or more fasteners **724**, as illustrated, or by welding.

In one embodiment, said sliding bracket **702** can attach to said one or more rail assemblies **206** by arranging said first plate **712** and said second plate **714** on either side of said mounting rail **402**, and sliding a portion of said one or more fasteners **718** through said one or more apertures **716** in said first plate **712**, a portion of said one or more apertures **422** of said mounting rail **402**, and said one or more apertures **716** in said second plate **714**.

FIGS. **8A** and **8B** illustrate a perspective overview and lower side view of said sliding bracket **702** and said support bracket **704**.

FIGS. **8C** and **8D** illustrate a perspective overview and top side view of a pegged tool holder assembly **800**.

In one embodiment, said pegged tool holder assembly **800** and said pegged tool holder assembly **700** can be substantially similar but for the arrangement of said plurality of pegs **708**, as illustrated.

FIGS. **9A**, **9B**, **9C**, and **9D** illustrate an elevated frontside, first side, top side and first view sideview of said sliding bracket **702** and said support bracket **704**.

In one embodiment, said support bracket **704** can comprise a mounting surface **900**. In one embodiment, said mounting surface **900** can comprise a sloped face at a slope angle **902** so as to present said accessory portion **802** for visual inspection to the end user, as is known in the art.

In one embodiment, said mounting surface **900** can comprise one or more top surfaces of said support bracket **704**. For example, as illustrated, said mounting surface **900** has a break.

FIGS. **10A**, **10B** and **10C** illustrate an elevated frontside, first side, and top side view of said peg board **706**.

FIGS. **10D**, **10E**, **10F**, and **10G** illustrate an elevated frontside, perspective overview, elevated first side, and top side view of a tabbed accessory assembly **1000**.

FIGS. **11A**, **11B** and **11C** illustrate an elevated frontside, first side, and top side view of said pegged tool holder assembly **700**.

FIGS. **12A** and **12B** illustrate a perspective overview of a toolbox accessory assembly **1200**.

Said toolbox accessory assembly **1200** can comprise a box **1202**, one or more slotted plates **1208**, and said sliding bracket **702**. In one embodiment, said box **1202** can comprise a plurality of pegs **1210** with a hinged lid **1212**. Said plurality of pegs **1210** can be arranged on a top surface **1214** of said hinged lid **1212**.

Said box **1202** can comprise an open configuration **1204** and a closed configuration **1206**.

Said one or more slotted plates **1208** can comprise a plurality of slots **1216** arranged and aligned on a bottom plane **1218** and a top plane **1220**, as illustrated.

Said toolbox accessory assembly **1200** can comprise a width **1222**, a gap **1224** between said one or more slotted plates **1208** can comprise a gap width **1226**, and each of said one or more slotted plates **1208** can comprise a width **1228**.

FIGS. **13A**, **13B**, and **13C** illustrate two perspective rear views and a perspective overview of said toolbox accessory assembly **1200** with said box **1202** in said open configuration **1204** and said closed configuration **1206**.

Said box **1202** can comprise a lower portion **1300** being attached to said hinged lid **1212** with a hinge **1302**. In one embodiment, said hinge **1302** can comprise two hinges, as illustrated.

In one embodiment, said toolbox accessory assembly **1200** can comprise a support bracket **1304**. Said support bracket **1304** can attach to said sliding bracket **702** and said box **1202**.

As shown in FIG. **13C**, said box **1202** can comprise a modified box with a substantially more squared configuration of said hinged lid **1212**.

In the case of said toolbox accessory assembly **1200**, said support bracket **704** can comprise said lower portion **1300**, as illustrated.

In one embodiment, said hinged lid **1212** can comprise a front lip **1306**, as illustrated. Said front lip **1306** can flip up so as to create a barrier which can prevent small items from inadvertently rolling off the front edge of said hinged lid **1212**.

FIG. **14** illustrates a perspective overview of said sliding bracket **702**, said support bracket **1304** and said one or more slotted plates **1208**.

Illustrated here are portions of said lower portion **1300** without said box **1202**.

In one embodiment, said one or more slotted plates **1208** can comprise a first slotted plate **1400a**, and a second slotted plate **1400b**.

Said support bracket **1304** can comprise a horizontal portion **1402** and a vertical portion **1404**.

Said lower portion **1300** can further comprise a horizontal support bar **1406**. In one embodiment, said horizontal portion **1402** can attach to said horizontal support bar **1406**, said vertical portion **1404** can attach to said sliding bracket **702**, and said one or more slotted plates **1208** can attach to said horizontal support bar **1406**. In one embodiment, said first slotted plate **1400a** can attach to a first end **1408** of said horizontal support bar **1406** and said second slotted plate **1400b** can attach to a second end **1410** of said horizontal support bar **1406**. In one embodiment, a weld can be used to hold each of said one or more slotted plates **1208**, said horizontal support bar **1406**, said support bracket **1304**, and said sliding bracket **702** together.

In one embodiment, said horizontal support bar **1406** can comprise a width equal to that of said width **1222** for all said lower portion **1300**.

FIGS. **15A** and **15B** illustrate an elevated top and front view of said toolbox accessory assembly **1200**.

FIG. **16** illustrates an elevated side view of said toolbox accessory assembly **1200**.

FIG. **17** illustrates a perspective overview of said toolbox accessory system **100** in a flat backed box configuration **1700**.

FIG. **18** illustrates a cross-section view of said flat backed box configuration **1700** with a flat back interior surface **1800** and a single rail assembly **1802**.

FIGS. **19** and **20** illustrate a perspective overview and elevated side view of said one or more accessory assemblies **208** attached to said single rail assembly **1802** in a stacked configuration **1900**, respectively.

In one embodiment, said one or more utility boxes **104** can comprise said flat backed box configuration **1700** wherein said one or more back walls **204** consist of only said flat back interior surface **1800**. Wherein, said one or more rail assemblies **206** can comprise of only said first rail assembly **206a** also referred to as said single rail assembly **1802**.

FIGS. **21A** and **21B** illustrate an elevated side and front view of said single rail assembly **1802**.

FIG. **22** illustrates a perspective overview of a long bed truck **2200**.

In one embodiment, said long bed truck **2200** can be similar to said truck **102**, but said one or more utility boxes **104** can comprise a wide utility box configuration **2202**, as illustrated. Wherein, said toolbox accessory system **100** may

need to be modified to fit within said wide utility box configuration **2202** with a wide configuration **2204**.

FIG. **23** illustrates a perspective overview of said wide utility box configuration **2202**.

Said wide utility box configuration **2202** of said one or more utility boxes **104** can comprise a height **2300**, a width **2302**, a first depth **2304** and a second depth **2306**, as illustrated.

FIGS. **24** and **25A** illustrate a perspective overview and an elevated side view of said wide configuration **2204** of said toolbox accessory system **100**, respectively.

In one embodiment, said toolbox accessory system **100** can comprise said wide configuration **2204**. Said wide configuration **2204** can comprise said one or more accessory assemblies **208** with wide configurations. For example, said pegged tool holder assembly **700** and said toolbox accessory assembly **1200** can comprise a two sliding brackets **2400** and a greater width for said wide configuration **2204**. Likewise, said one or more rail assemblies **206** can comprise a two parallel rails **2402** aligned on said one or more back walls **204** for holding said one or more accessory assemblies **208**.

As illustrated, said two parallel rails **2402** can be split similar to said first rail assembly **206a** and said second rail assembly **206b** attached to said lower backwall **300** and said upper backwall **302**, as discussed above.

FIGS. **25B**, and **25C** illustrate a perspective overview of said wide configuration **2204** comprising a drive socket holder assembly **2500**.

In one embodiment, said drive socket holder assembly **2500** can receive and hold sockets for a socket wrench, as is known in the art.

FIG. **26** illustrates a perspective overview said two parallel rails **2402**.

In one embodiment, said two parallel rails **2402** can comprise one or more sets of rails **2600**. **2600**/can comprise a first set of rails **2600a**, and a second set of rails **2600b**. each of said one or more sets of rails **2600** can comprise a first rail **2602** and a second rail **2604**, arranged in parallel and with one or more support bars **2606** arranged between one another.

In one embodiment, said two parallel rails **2402** can comprise a single set of said one or more sets of rails **2600**, arranged along a single back surface of said one or more utility boxes **104**, as discussed herein.

In one embodiment, each among said one or more sets of rails **2600** can comprise one or more rail lengths **2608**. In one embodiment, said one or more rail lengths **2608** can comprise a first rail length **2608a** for said first set of rails **2600a** and a second rail length **2608b** for said second set of rails **2600b**. One feature of said toolbox accessory system **100** can comprise adjusting the dimensions of said one or more sets of rails **2600** and or said one or more rail assemblies **206** to fit those of said one or more back walls **204** of said utility box **104a**. Accordingly, said toolbox accessory system **100** can comprise a versatility not found in other tool box organizers found on the market. Since said one or more accessory assemblies **208** are secured to said one or more back walls **204** by way of said one or more rail assemblies **206**, said toolbox accessory system **100** is known to be safer and more versatile than prior tool box systems. Likewise, because said one or more rail assemblies **206** can be efficiently arranged withing said utility box **104a**, space within said utility box **104a** is better utilized.

FIGS. **27A**, **27B**, and **27C** illustrate a perspective overview and lower back side view of said pegged tool holder assembly **700** and said pegged tool holder assembly **800** in a wide configuration **2700**.

In one embodiment, said wide configuration **2700** of said pegged tool holder assembly **700** can comprise an increased width **2702**, additional said plurality of pegs **708**, and said two sliding brackets **2400**.

FIGS. **28A**, **28B**, and **28C** illustrate a perspective overview, lower back side view, and a perspective overview of said toolbox accessory assembly **1200** in a wide configuration **2800**.

In one embodiment, said wide configuration **2800** of said toolbox accessory assembly **1200** can comprise an increased width **2802** (as compared with said width **1222**), and the addition of more of said one or more slotted plates **1208**, as illustrated.

As shown in FIG. **28C**, said box **1202** can comprise a squared off version of said hinged lid **1212**, as discussed above.

FIG. **29** illustrates a perspective overview of said drive socket holder assembly **2500**.

Parts discussed in this patent include:

said toolbox accessory system **100**,
 said truck **102**,
 said one or more utility boxes **104**,
 said utility box **104a**,
 said second utility box **104b**,
 said flat floor **106**,
 said door **200**,
 said compartment **202**,
 said one or more back walls **204**,
 said one or more rail assemblies **206**,
 said first rail assembly **206a**,
 said second rail assembly **206b**,
 said one or more accessory assemblies **208**,
 said first accessory assembly **208a**,
 said second accessory assembly **208b**,
 said third accessory assembly **208c**,
 said front opening **210**,
 said height **212**,
 said depth **214**,
 said width **216**,
 said open configuration **218**,
 said box shell **220**,
 said lower backwall **300**,
 said upper backwall **302**,
 said first depth **304**,
 said second depth **306**,
 said horizontal shelf **308**,
 said top portion **310**,
 said bottom portion **312**,
 said two side walls **314**,
 said vertical configuration **316**,
 said backing portion **400**,
 said mounting rail **402**,
 said one or more fasteners **404**,
 said width **406**,
 said length **408**,
 said depth **410**,
 said width **412**,
 said depth **414**,
 said length **416**,
 said first end **418**,
 said second end **420**,
 said one or more apertures **422**,
 said first aperture **422a**,

11

said second aperture **422b**,
said side portion **424**,
said pegged tool holder assembly **700**,
said sliding bracket **702**,
said support bracket **704**,
said peg board **706**,
said plurality of pegs **708**,
said one or more raised planes **710**,
said first plate **712**,
said second plate **714**,
said one or more apertures **716**,
said one or more fasteners **718**,
said backside **720**,
said top face **722**,
said one or more fasteners **724**,
said pegged tool holder assembly **800**,
said accessory portion **802**,
said mounting surface **900**,
said slope angle **902**,
said tabbed accessory assembly **1000**,
said toolbox accessory assembly **1200**,
said box **1202**,
said open configuration **1204**,
said closed configuration **1206**,
said one or more slotted plates **1208**,
said plurality of pegs **1210**,
said hinged lid **1212**,
said top surface **1214**,
said plurality of slots **1216**,
said bottom plane **1218**,
said top plane **1220**,
said width **1222**,
said gap **1224**,
said gap width **1226**,
said width **1228**,
said lower portion **1300**,
said hinge **1302**,
said support bracket **1304**,
said first slotted plate **1400a**,
said second slotted plate **1400b**,
said horizontal portion **1402**,
said vertical portion **1404**,
said horizontal support bar **1406**,
said first end **1408**,
said second end **1410**,
said flat backed box configuration **1700**,
said flat back interior surface **1800**,
said single rail assembly **1802**,
said stacked configuration **1900**,
said long bed truck **2200**,
said wide utility box configuration **2202**,
said wide configuration **2204**,
said height **2300**,
said width **2302**,
said first depth **2304**,
said second depth **2306**,
said two sliding brackets **2400**,
said two parallel rails **2402**,
said drive socket holder assembly **2500**,
said one or more sets of rails **2600**,
said first set of rails **2600a**,
said second set of rails **2600b**,
said first rail **2602**,
said second rail **2604**,
said one or more support bars **2606**,
said wide configuration **2700**,
said increased width **2702**,

12

said wide configuration **2800**,
and
said increased width **2802**.

The following description of said toolbox accessory system **100** is included to ensure all subject matter found in the original claims will also be found in the specification.

Said toolbox accessory system **100** for organizing and utilizing said utility box **104a** of said truck **102**. Said toolbox accessory system **100** comprises said one or more rail assemblies **206** attached to said one or more back walls **204** of said utility box **104a**. Said toolbox accessory system **100** comprises said one or more accessory assemblies **208** configured to selectively attach to said one or more rail assemblies **206**. Said one or more accessory assemblies **208** can be configured to selectively store tools within said one or more utility boxes **104**. Said one or more accessory assemblies **208** can be attached in a vertical configuration along said one or more back walls **204** of said one or more utility boxes **104**. Said box shell **220** comprises said one or more back walls **204**, said top portion **310**, said bottom portion **312**, said two side walls **314**, and said front opening **210**. Said one or more rail assemblies **206** can be arranged between said top portion **310** and said bottom portion **312** in said vertical configuration **316**.

Said one or more back walls **204** comprises said lower backwall **300** and said upper backwall **302**. Said lower backwall **300** can be set back said first depth **304** and said upper backwall **302** can be set back said second depth **306**. Said one or more back walls **204** comprises a plurality of planar surfaces, as opposed to a single planar surface. Said one or more rail assemblies **206** comprises said first rail assembly **206a** and said second rail assembly **206b**. Said first rail assembly **206a** attaches to said upper backwall **302** and said second rail assembly **206b** can be configured to attach to said lower backwall **300**.

Said one or more rail assemblies **206** comprises at least said mounting rail **402**. Said mounting rail **402** comprises said width **412** and said depth **414** and said length **416**. Said mounting rail **402** can be configured selectively attach to a portion of said one or more back walls **204** and selectively receive and hold said one or more accessory assemblies **208**. Said mounting rail **402** comprises said side portion **424** having said one or more apertures **422**. Said one or more apertures **422** comprise at least said first aperture **422a**, and said second aperture **422b**. Said one or more accessory assemblies **208** can be configured to attach to said one or more apertures **422**.

Said one or more rail assemblies **206** comprises said backing portion **400**, and said one or more fasteners **404**. Said backing portion **400** comprises said width **406**, said length **408**, and said depth **410**. Said backing portion **400** can be attached to said mounting rail **402** by welding the two parts together. Said one or more rail assemblies **206** can be configured to selectively attach to portions of said one or more back walls **204** by attaching said mounting rail **402** to said backing portion **400**, and selectively attaching said backing portion **400** to said one or more back walls **204** with said one or more fasteners **404**.

Said backing portion **400** a u-shaped bracket.
each among said one or more accessory assemblies **208** comprise said sliding bracket **702**. Said sliding bracket **702** can be configured to selectively attach said one or more accessory assemblies **208** to said one or more rail assemblies **206**.

Said sliding bracket **702** comprises said first plate **712** and said second plate **714** arranged parallel to one another with

13

said one or more apertures **716** for receiving and holding said one or more fasteners **718**.

Said sliding bracket **702** can be configured to attach to said one or more rail assemblies **206** by arranging said first plate **712** and said second plate **714** on either side of said mounting rail **402**, and sliding a portion of said one or more fasteners **718** through said one or more apertures **716** in said first plate **712**, a portion of said one or more apertures **422** of said mounting rail **402**, and said one or more apertures **716** in said second plate **714**.

each among said one or more accessory assemblies **208** comprises said support bracket **704** and said accessory portion **802**. Said sliding bracket **702** can be configured to selectively attach to said one or more rail assemblies **206**. Said support bracket **704** can be configured to attach to said sliding bracket **702**. Said accessory portion **802** comprises useful parts of said one or more accessory assemblies **208** for organizing tools or objects within said one or more utility boxes **104**.

Said one or more accessory assemblies **208** comprises said pegged tool holder assembly **700**. Said accessory portion **802** of said pegged tool holder assembly **700** comprises said plurality of pegs **708**.

Said one or more accessory assemblies **208** comprises said tabbed accessory assembly **1000**. Said accessory portion **802** of said pegged tool holder assembly **700** comprises a plurality of pegs.

Said one or more accessory assemblies **208** comprises said toolbox accessory assembly **1200**. Said accessory portion **802** of said toolbox accessory assembly **1200** comprises at least said box **1202**.

Said toolbox accessory assembly **1200** comprises said box **1202**, said one or more slotted plates **1208**, and said sliding bracket **702**. Said box **1202** comprises said plurality of pegs **1210** with said hinged lid **1212**. Said plurality of pegs **1210** can be arranged on said top surface **1214** of said hinged lid **1212**. Said box **1202** comprises said open configuration **1204** and said closed configuration **1206** said one or more slotted plates **1208** comprises said plurality of slots **1216** arranged and aligned on said bottom plane **1218** and said top plane **1220**, as illustrated. Said toolbox accessory assembly **1200** comprises said width **1222**, said gap **1224** between said one or more slotted plates **1208** comprises said gap width **1226**, and each of said one or more slotted plates **1208** comprises said width **1228**.

Said box **1202** comprises said lower portion **1300** being attached to said hinged lid **1212** with said hinge **1302**.

Said support bracket **704** can be configured to extend horizontally out from said sliding bracket **702** and support said accessory portion **802** of said one or more accessory assemblies **208**.

Various changes in the details of the illustrated operational methods are possible without departing from the scope of the following claims. Some embodiments may combine the activities described herein as being separate steps. Similarly, one or more of the described steps may be omitted, depending upon the specific operational environment the method is being implemented in. It is to be understood that the above description is intended to be illustrative, and not restrictive. For example, the above-described embodiments may be used in combination with each other. Many other embodiments will be apparent to those of skill in the art upon reviewing the above description. The scope of the invention should, therefore, be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled. In the appended claims, the terms “including” and “in

14

which” are used as the plain-English equivalents of the respective terms “comprising” and “wherein.”

The invention claimed is:

1. A toolbox accessory system for organizing and utilizing a utility box of a truck, wherein:

said toolbox accessory system comprises one or more rail assemblies attached to one or more back walls of said utility box;

said toolbox accessory system comprises one or more accessory assemblies configured to selectively attach to said one or more rail assemblies;

said one or more accessory assemblies are configured to selectively store tools within said utility box;

said one or more accessory assemblies are attached in a substantially vertical configuration along said one or more back walls of said utility box;

said utility box comprises a box shell having said one or more back walls, a top portion, a bottom portion, two side walls, and a front opening;

said one or more rail assemblies are arranged between said top portion and said bottom portion in a vertical configuration;

said one or more back walls comprise a lower backwall and an upper backwall;

said lower backwall is set back a first depth and said upper backwall is set back a second depth;

said one or more back walls comprise a plurality of planar surfaces, as opposed to a single planar surface;

said one or more rail assemblies comprises a first rail assembly and a second rail assembly; and

said first rail assembly attaches to said upper backwall and said second rail assembly is configured to attach to said lower backwall.

2. The toolbox accessory system of claim 1, wherein: said utility box comprises a flat backed box configuration wherein said one or more back walls consist of only a flat back interior surface;

wherein, said one or more rail assemblies comprises of only said first rail assembly also referred to as a single rail assembly; and

said single rail assembly extends between said top portion and said bottom portion of said box shell.

3. The toolbox accessory system of claim 1, wherein: said one or more rail assemblies comprises at least a mounting rail;

said mounting rail comprises a width and a depth and a length;

said mounting rail is configured selectively attach to a portion of said one or more back walls and selectively receive and hold said one or more accessory assemblies;

said mounting rail comprises a side portion having one or more apertures;

said one or more apertures comprise at least a first aperture, and a second aperture; and

said one or more accessory assemblies are configured to attach to said one or more apertures.

4. The toolbox accessory system of claim 3, wherein: said one or more rail assemblies comprises a backing portion, and one or more fasteners;

said backing portion comprises a width, a length, and a depth;

said backing portion is attached to said mounting rail by welding the two parts together;

said one or more rail assemblies are configured to selectively attach to portions of said one or more back walls by

15

attaching said mounting rail to said backing portion, and selectively attaching said backing portion to said one or more back walls with said one or more fasteners.

5 **5.** The toolbox accessory system of claim 4, wherein: said backing portion a C-bracket.

6. The toolbox accessory system of claim 3, wherein: each among said one or more accessory assemblies comprise a sliding bracket; and said sliding bracket is configured to selectively attach said one or more accessory assemblies to said one or more rail assemblies.

7. The toolbox accessory system of claim 6, wherein: said sliding bracket comprises a first plate and a second plate arranged parallel to one another with one or more apertures for receiving and holding one or more fasteners.

8. The toolbox accessory system of claim 7, wherein: said sliding bracket is configured to attach to said one or more rail assemblies by arranging said first plate and said second plate on either side of said mounting rail, and sliding a portion of said one or more fasteners through said one or more apertures in said first plate, a portion of said one or more apertures of said mounting rail, and said one or more apertures in said second plate.

9. The toolbox accessory system of claim 1, wherein: each among said one or more accessory assemblies comprises a support bracket a sliding bracket and an accessory portion; said sliding bracket is configured to selectively attach to said one or more rail assemblies; said support bracket is configured to attach to said sliding bracket; and said accessory portion comprises useful parts of said one or more accessory assemblies for organizing tools or objects within said utility box.

10. The toolbox accessory system of claim 9, wherein: said one or more accessory assemblies comprises a pegged tool holder assembly; and said accessory portion of said pegged tool holder assembly comprises plurality of pegs.

11. The toolbox accessory system of claim 9, wherein: said one or more accessory assemblies comprises a tabbed accessory assembly; and said accessory portion of said pegged tool holder assembly comprises a plurality of pegs.

12. The toolbox accessory system of claim 9, wherein: said one or more accessory assemblies comprises a toolbox accessory assembly; and said accessory portion of said toolbox accessory assembly comprises at least a box.

13. The toolbox accessory system of claim 12, wherein: said toolbox accessory assembly comprises said box, one or more slotted plates, and said sliding bracket; said box comprises a plurality of pegs with a hinged lid; said plurality of pegs is arranged on a top surface of said hinged lid; said box comprises an open configuration and a closed configuration; said one or more slotted plates comprises a plurality of slots arranged and aligned on a bottom plane and a top plane, as illustrated; and

65

16

said toolbox accessory assembly comprises a width, a gap between said one or more slotted plates comprises a gap width, and each of said one or more slotted plates comprises a width.

14. The toolbox accessory system of claim 13, wherein: said box comprises a lower portion being attached to said hinged lid with a hinge.

15. The toolbox accessory system of claim 9, wherein: said support bracket is configured to extend horizontally out from said sliding bracket and support said accessory portion of said one or more accessory assemblies.

16. The toolbox accessory system of claim 1, wherein: said pegged tool holder assembly and said toolbox accessory assembly comprise two sliding brackets; and said one or more rail assemblies comprises two parallel rails aligned on said one or more back walls for holding said one or more accessory assemblies.

17. The toolbox accessory system of claim 16, wherein: said two parallel rails are split with a first portion of said two parallel rails attached to said lower backwall and a second portion of said two parallel rails attached to said upper backwall; said two parallel rails comprises a first set of rails, and a second set of rails arranged in parallel; said two parallel rails comprise one or more support bars arranged between one another.

18. A toolbox accessory system for organizing and utilizing a utility box of a truck, wherein: said toolbox accessory system comprises one or more rail assemblies attached to one or more interior walls of said utility box; said toolbox accessory system comprises one or more accessory assemblies configured to selectively attach to said one or more rail assemblies; said one or more accessory assemblies are configured to selectively store tools within said utility box; said one or more accessory assemblies are attached in a substantially vertical configuration along said one or more interior walls of said utility box; said utility box comprises a box shell having said one or more interior walls, a top portion, a bottom portion, two side walls, and a front opening; said one or more rail assemblies are arranged between said top portion and said bottom portion in a vertical configuration; said one or more rail assemblies comprises at least a mounting rail; said mounting rail comprises a width and a depth and a length; said mounting rail is configured selectively attach to a portion of said one or more interior walls and selectively receive and hold said one or more accessory assemblies; said mounting rail comprises a side portion having one or more apertures; said one or more apertures comprise at least a first aperture, and a second aperture; said one or more accessory assemblies are configured to attach to said one or more apertures; said one or more rail assemblies comprises a backing portion, and one or more fasteners; said backing portion comprises a width, a length, and a depth; said backing portion is attached to said mounting rail by welding the two parts together;

17

said one or more rail assemblies are configured to selectively attach to portions of said one or more interior walls by
 attaching said mounting rail to said backing portion, and
 selectively attaching said backing portion to said one or more interior walls with said one or more fasteners.
 19. A toolbox accessory system for organizing and utilizing a utility box of a truck, wherein:
 said toolbox accessory system comprises one or more rail assemblies attached to one or more back walls of said utility box;
 said toolbox accessory system comprises one or more accessory assemblies configured to selectively attach to said one or more rail assemblies;
 said one or more accessory assemblies are configured to selectively store tools within said utility box;
 said one or more accessory assemblies are attached in a substantially vertical configuration along said one or more back walls of said utility box;
 said utility box comprises a box shell having said one or more back walls, a top portion, a bottom portion, two side walls, and a front opening;
 said one or more rail assemblies are arranged between said top portion and said bottom portion in a vertical configuration;
 each among said one or more accessory assemblies comprises a support bracket, a sliding bracket and an accessory portion;
 said sliding bracket is configured to selectively attach to said one or more rail assemblies;

18

said support bracket is configured to attach to said sliding bracket; and
 said accessory portion comprises useful parts of said one or more accessory assemblies for organizing tools or objects within said utility box.
 20. A toolbox accessory system for organizing and utilizing a utility box of a truck, wherein:
 said toolbox accessory system comprises one or more rail assemblies attached to one or more back walls of said utility box;
 said toolbox accessory system comprises one or more accessory assemblies configured to selectively attach to said one or more rail assemblies;
 said one or more accessory assemblies are configured to selectively store tools within said utility box;
 said one or more accessory assemblies are attached in a substantially vertical configuration along said one or more back walls of said utility box;
 said utility box comprises a box shell having said one or more back walls, a top portion, a bottom portion, two side walls, and a front opening;
 said one or more rail assemblies are arranged between said top portion and said bottom portion in a vertical configuration;
 said pegged tool holder assembly and said toolbox accessory assembly comprise two sliding brackets; and
 said one or more rail assemblies comprises two parallel rails aligned on said one or more back walls for holding said one or more accessory assemblies.

* * * * *