



US009163456B2

(12) **United States Patent**  
**Price**

(10) **Patent No.:** **US 9,163,456 B2**  
(45) **Date of Patent:** **Oct. 20, 2015**

(54) **TIRE STEP SYSTEM AND METHOD**

(56) **References Cited**

(71) Applicant: **Barry Price**, Shamrock, TX (US)

U.S. PATENT DOCUMENTS

(72) Inventor: **Barry Price**, Shamrock, TX (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

387,045	A *	7/1888	Braun	.....	182/33.2
2,805,703	A *	9/1957	Wise	.....	182/33.3
4,541,507	A *	9/1985	Gibellato	.....	182/86
5,072,955	A *	12/1991	Holland et al.	.....	280/32.5
D356,164	S *	3/1995	Rinke	.....	D25/64
D376,784	S	12/1996	Miller		
5,669,463	A *	9/1997	Robertson	.....	182/116
6,044,928	A	4/2000	Law et al.		
2006/0157301	A1	7/2006	Embretsen		
2010/0012431	A1 *	1/2010	Ehnes	.....	182/150
2010/0122871	A1	5/2010	Gottlinger		

(21) Appl. No.: **14/200,021**

(22) Filed: **Mar. 7, 2014**

\* cited by examiner

(65) **Prior Publication Data**

US 2015/0252617 A1 Sep. 10, 2015

*Primary Examiner* — Alvin Chin-Shue  
(74) *Attorney, Agent, or Firm* — Shannon L Warren

(51) **Int. Cl.**

- E06C 1/39** (2006.01)
- E06C 1/38** (2006.01)
- E06C 1/397** (2006.01)
- E06C 7/18** (2006.01)
- B60R 3/00** (2006.01)

(57) **ABSTRACT**

A vehicle step is disclosed comprising a frame and a plurality of steps. Said vehicle step comprises a first side, a second side, a front, and a back. Said frame supports said plurality of steps. Said plurality of steps comprise, at least, a first step and an adjustable step. Said first step serves as a platform for a user of said vehicle step to gain access to said adjustable step. Said adjustable step comprises a one or more hinges. Said adjustable step is rotateably attached to said frame such that said back of said vehicle step can be placed near a wheel, and said adjustable step can rotate on said one or more hinges over and rest on a top portion of said wheel.

(52) **U.S. Cl.**


CPC . **E06C 1/38** (2013.01); **B60R 3/007** (2013.01);  
**E06C 1/39** (2013.01); **E06C 1/397** (2013.01);  
**E06C 7/183** (2013.01)

(58) **Field of Classification Search**

CPC ..... E06C 7/48; E06C 1/34; E06C 1/39;  
E06C 1/397; B60R 3/007

See application file for complete search history.

**3 Claims, 11 Drawing Sheets**

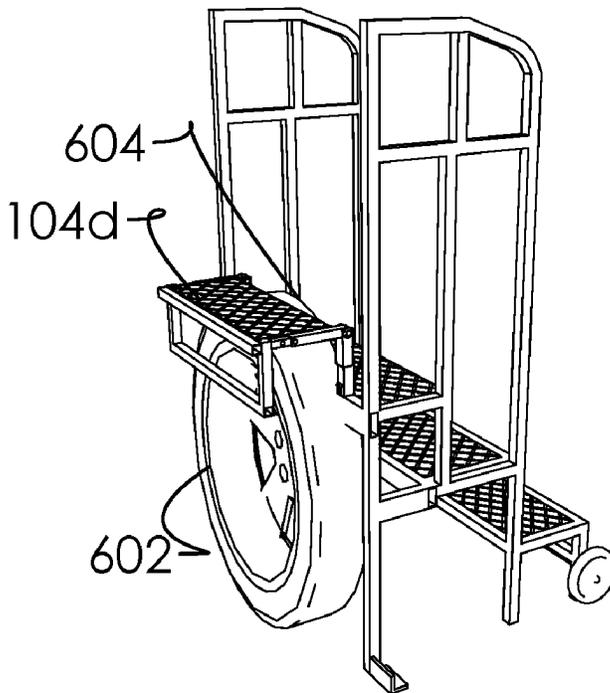

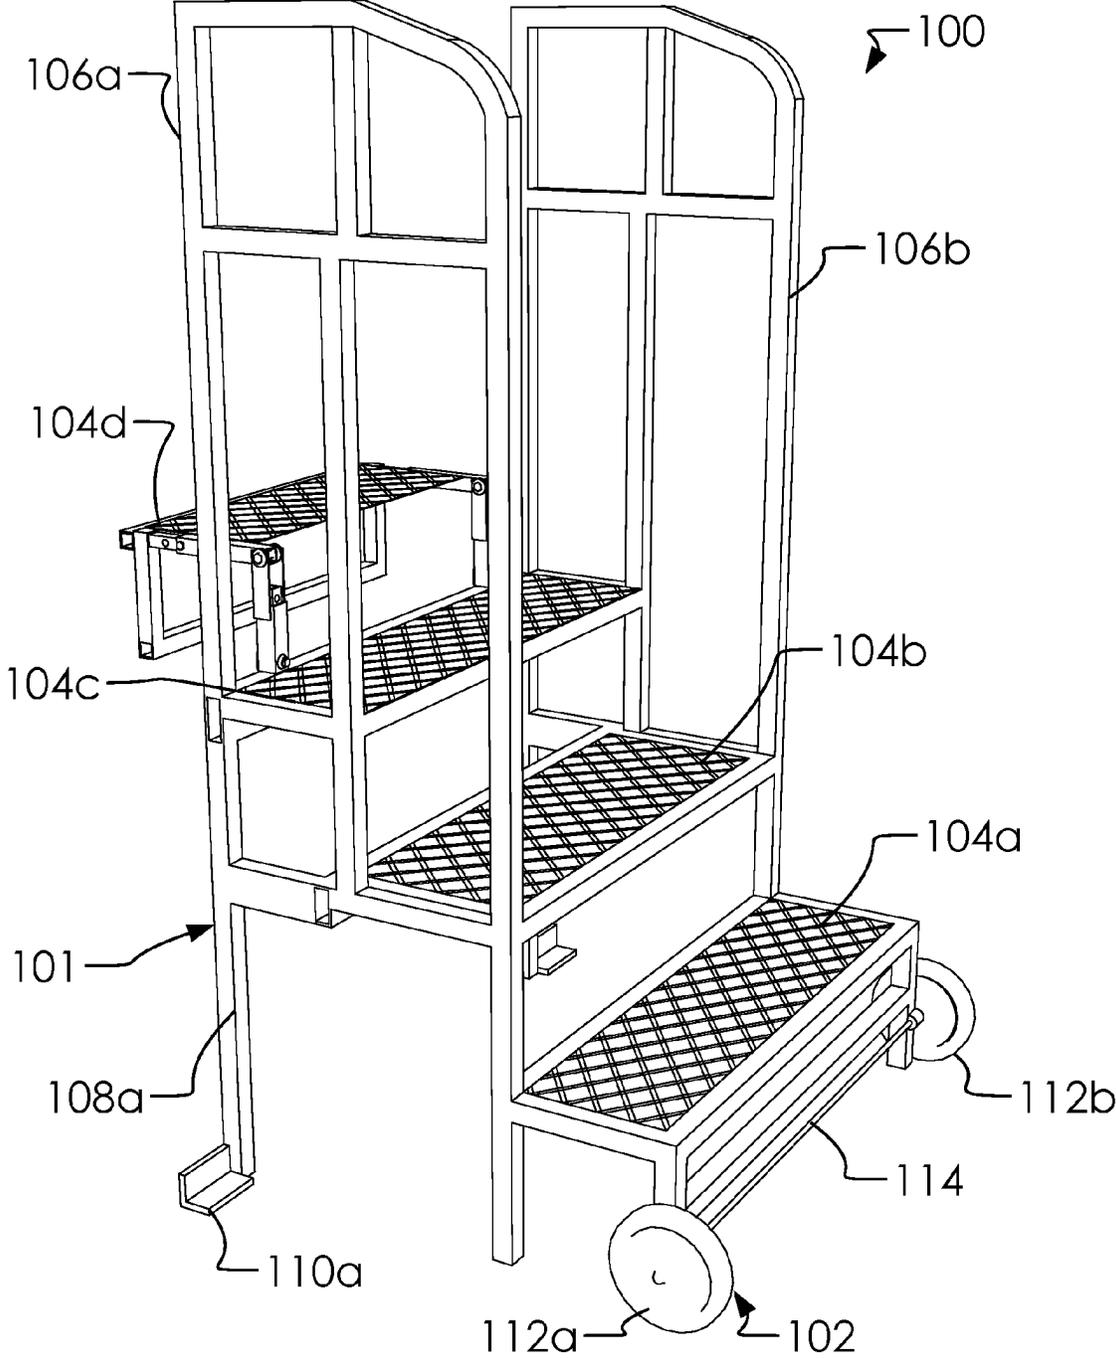


Fig. 1A

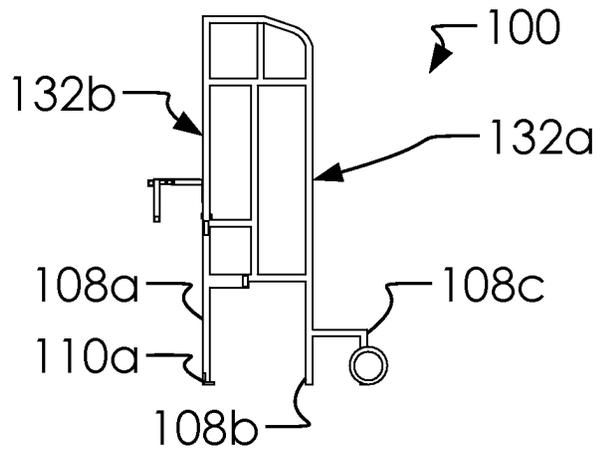


Fig. 1B

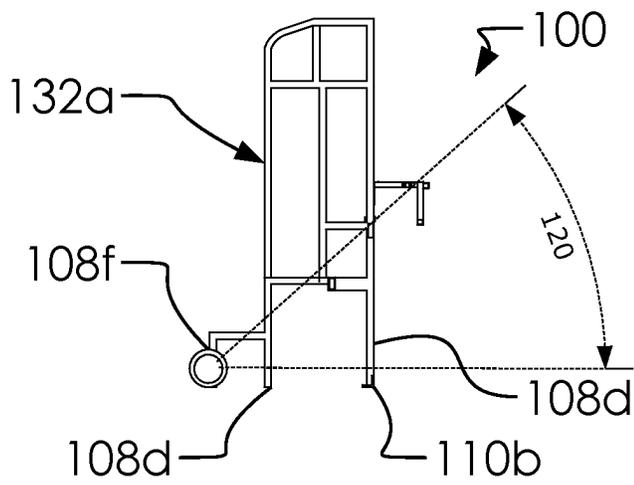


Fig. 1C

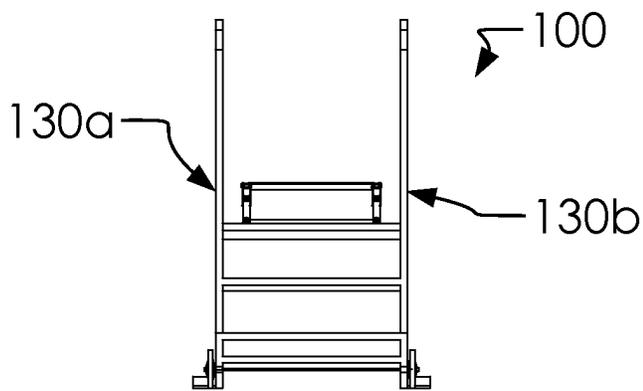


Fig. 1D

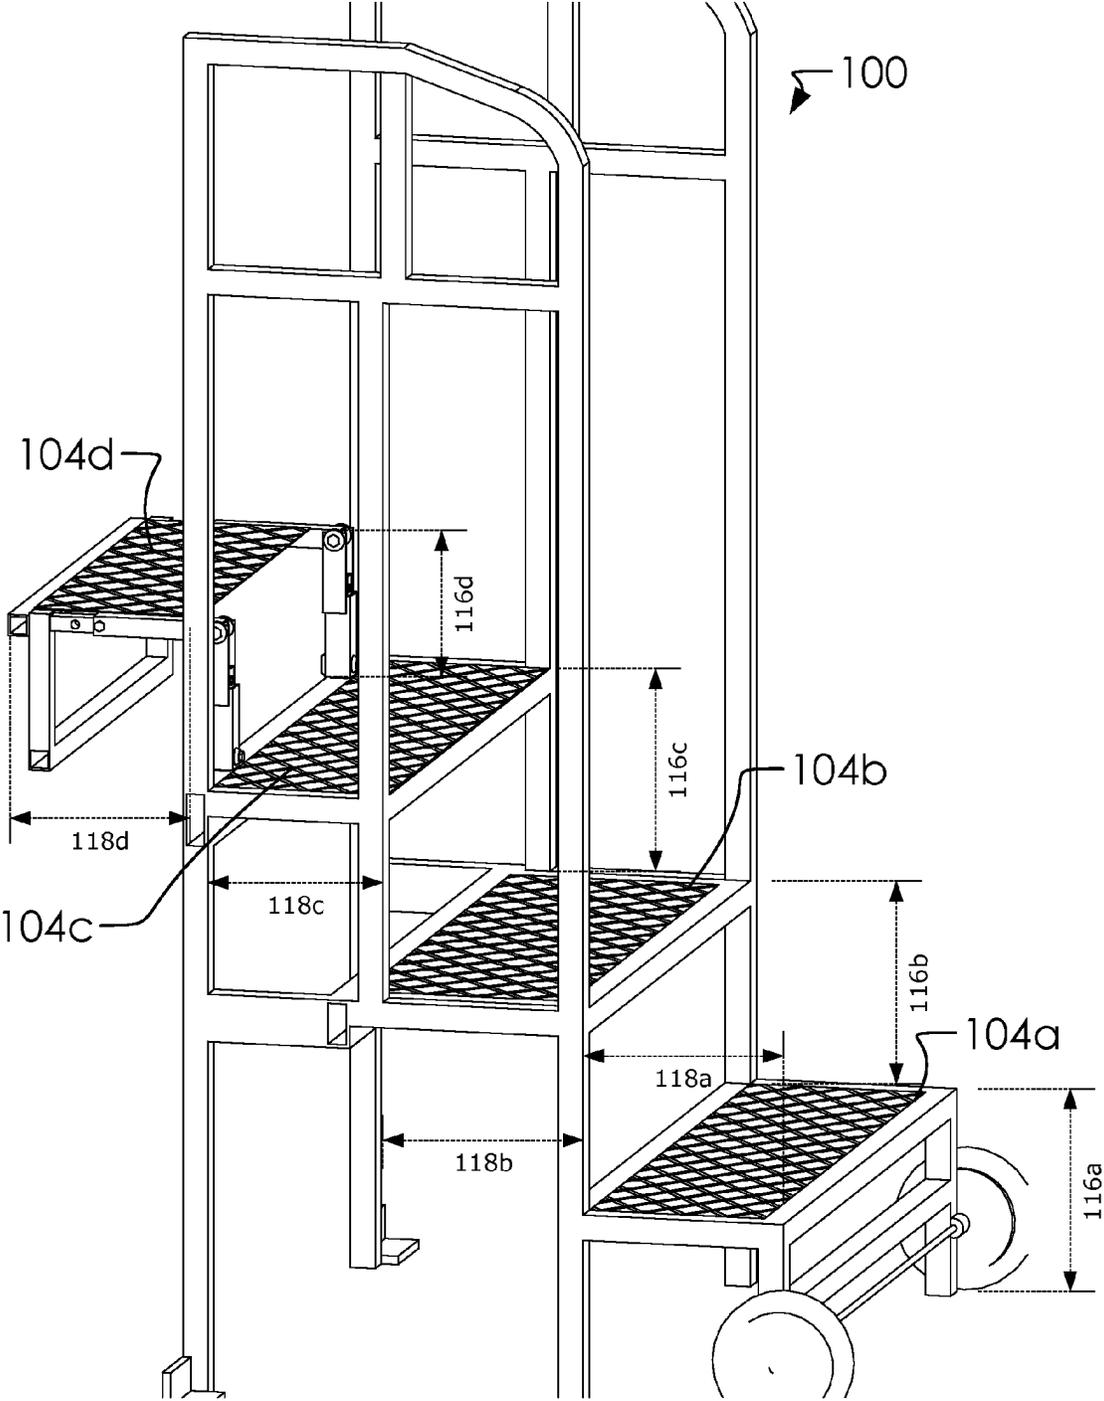


Fig. 1E

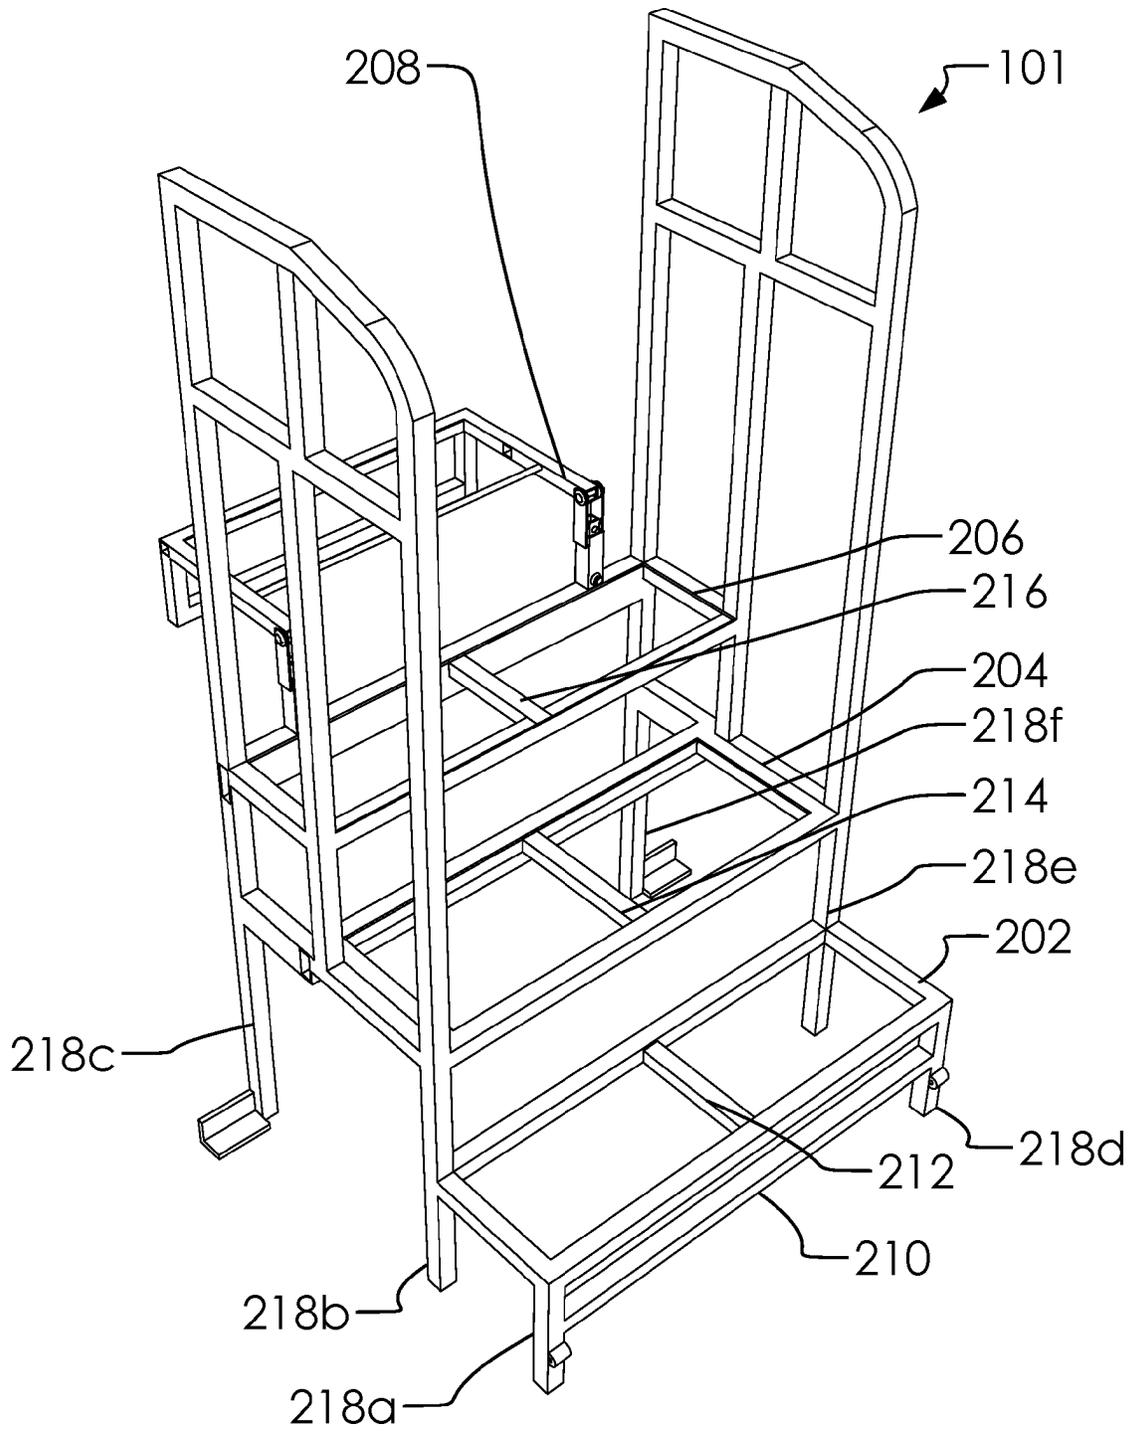


Fig. 2A

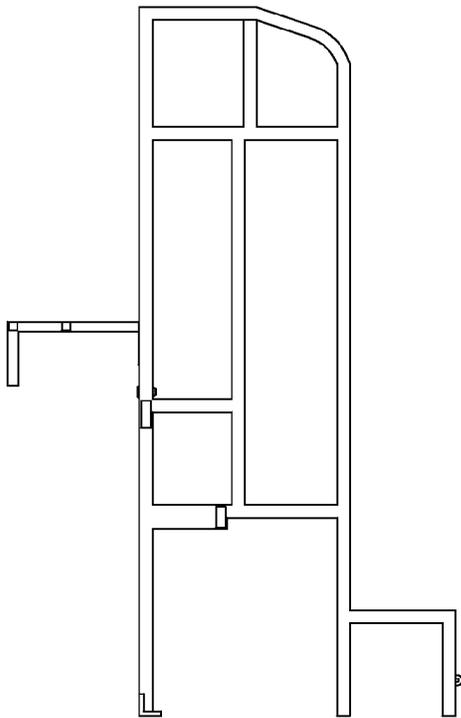


Fig. 2B

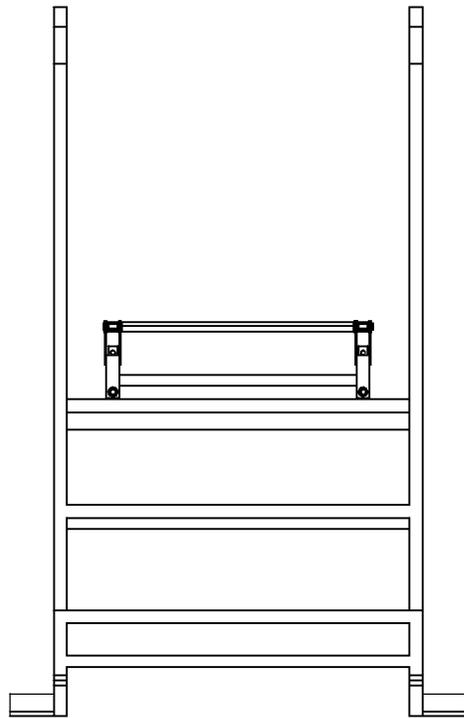


Fig. 2C

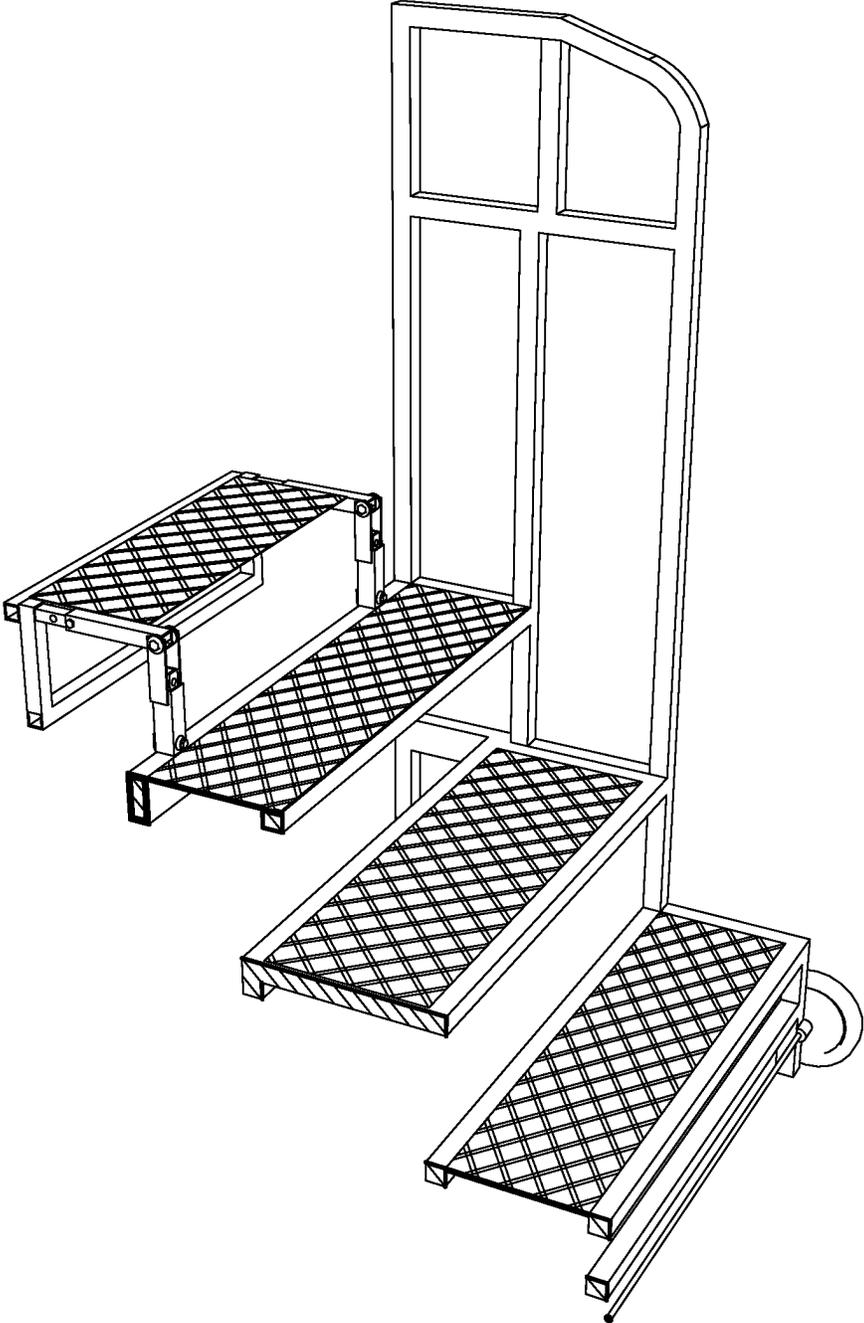


Fig. 3

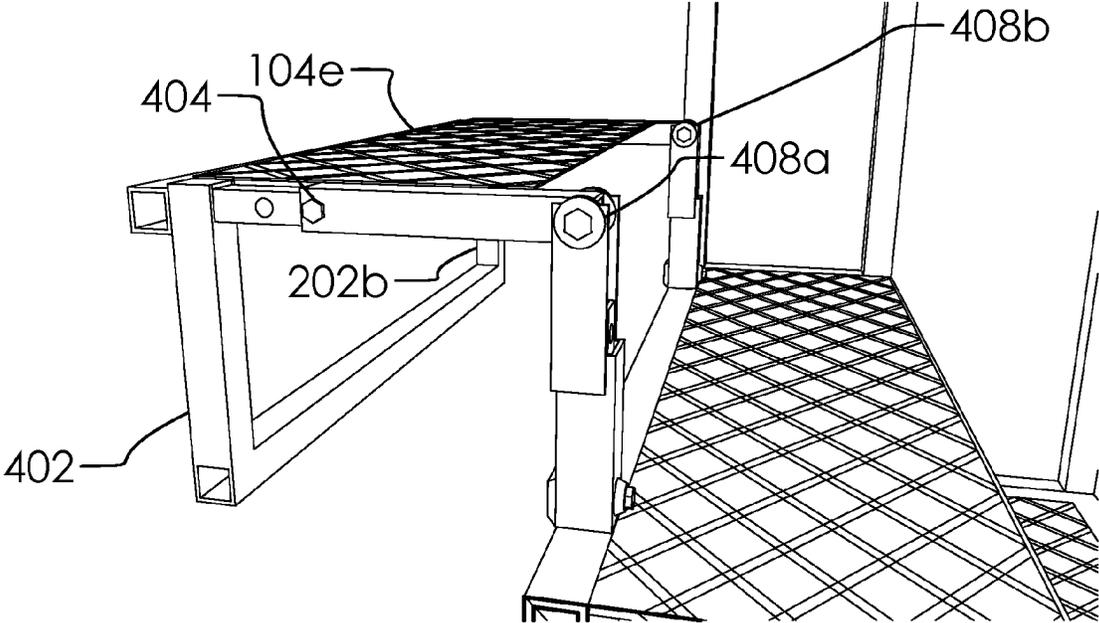


Fig. 4A

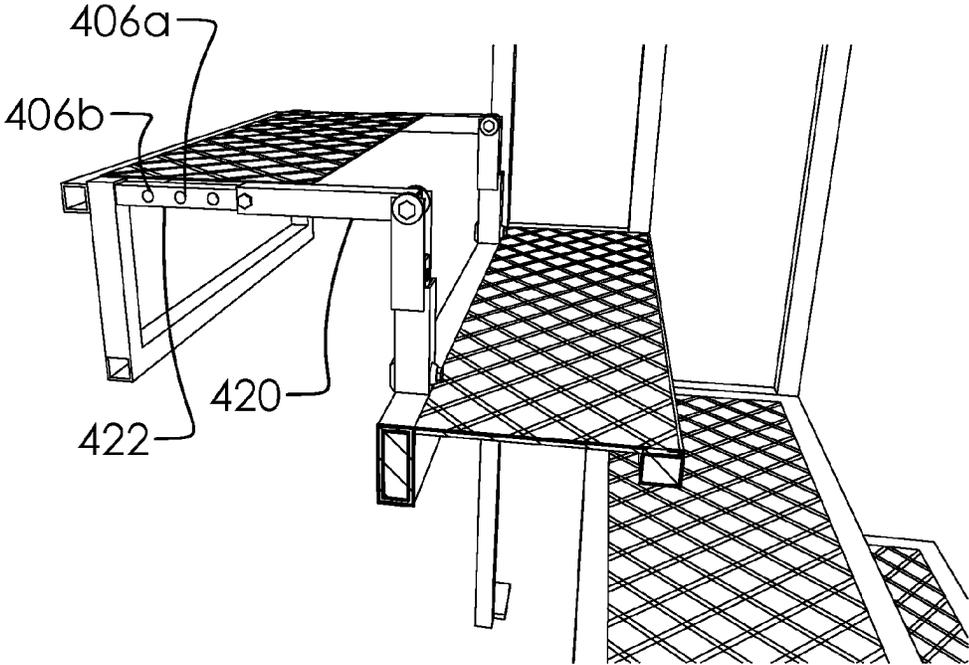


Fig. 4B

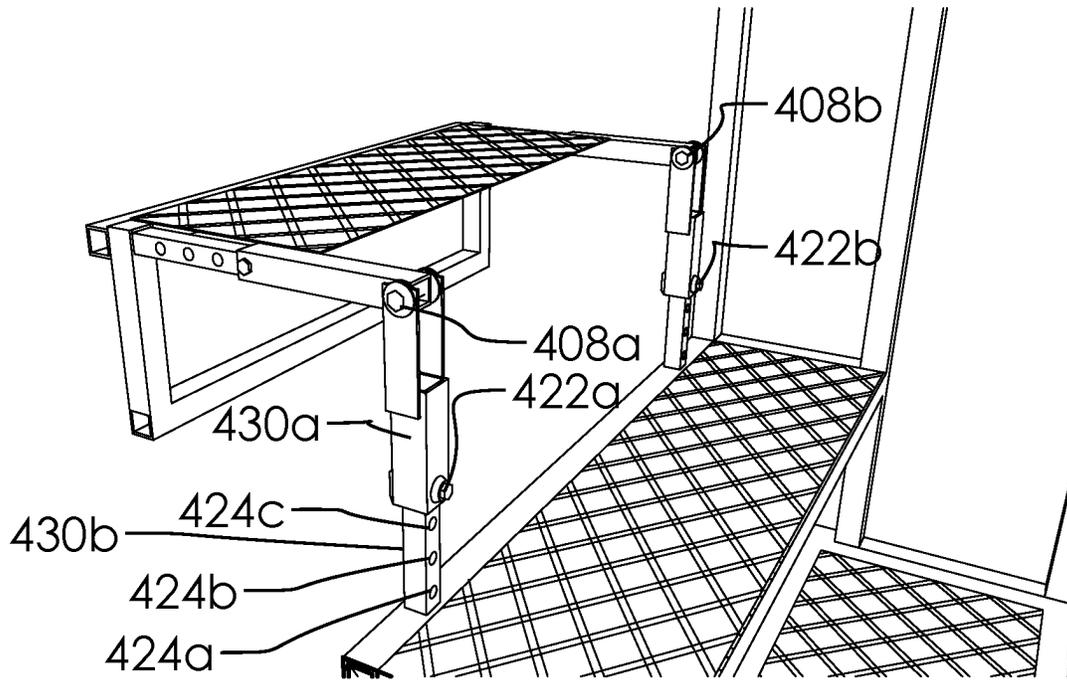


Fig. 4C

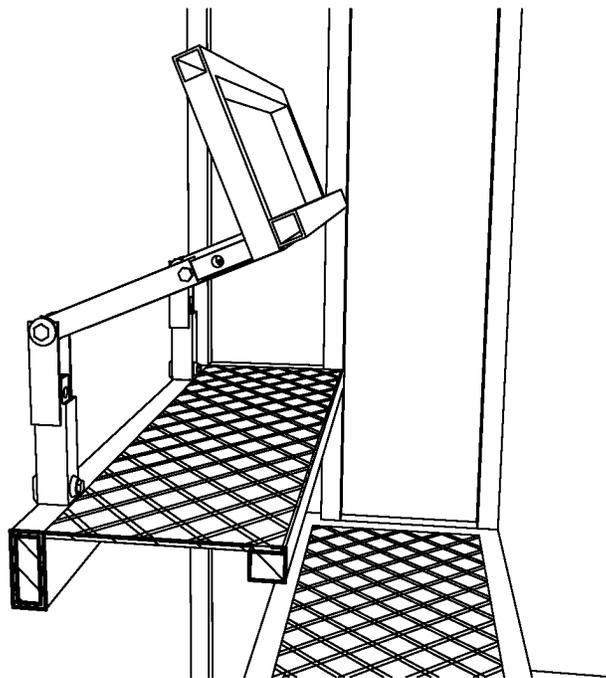


Fig. 4D

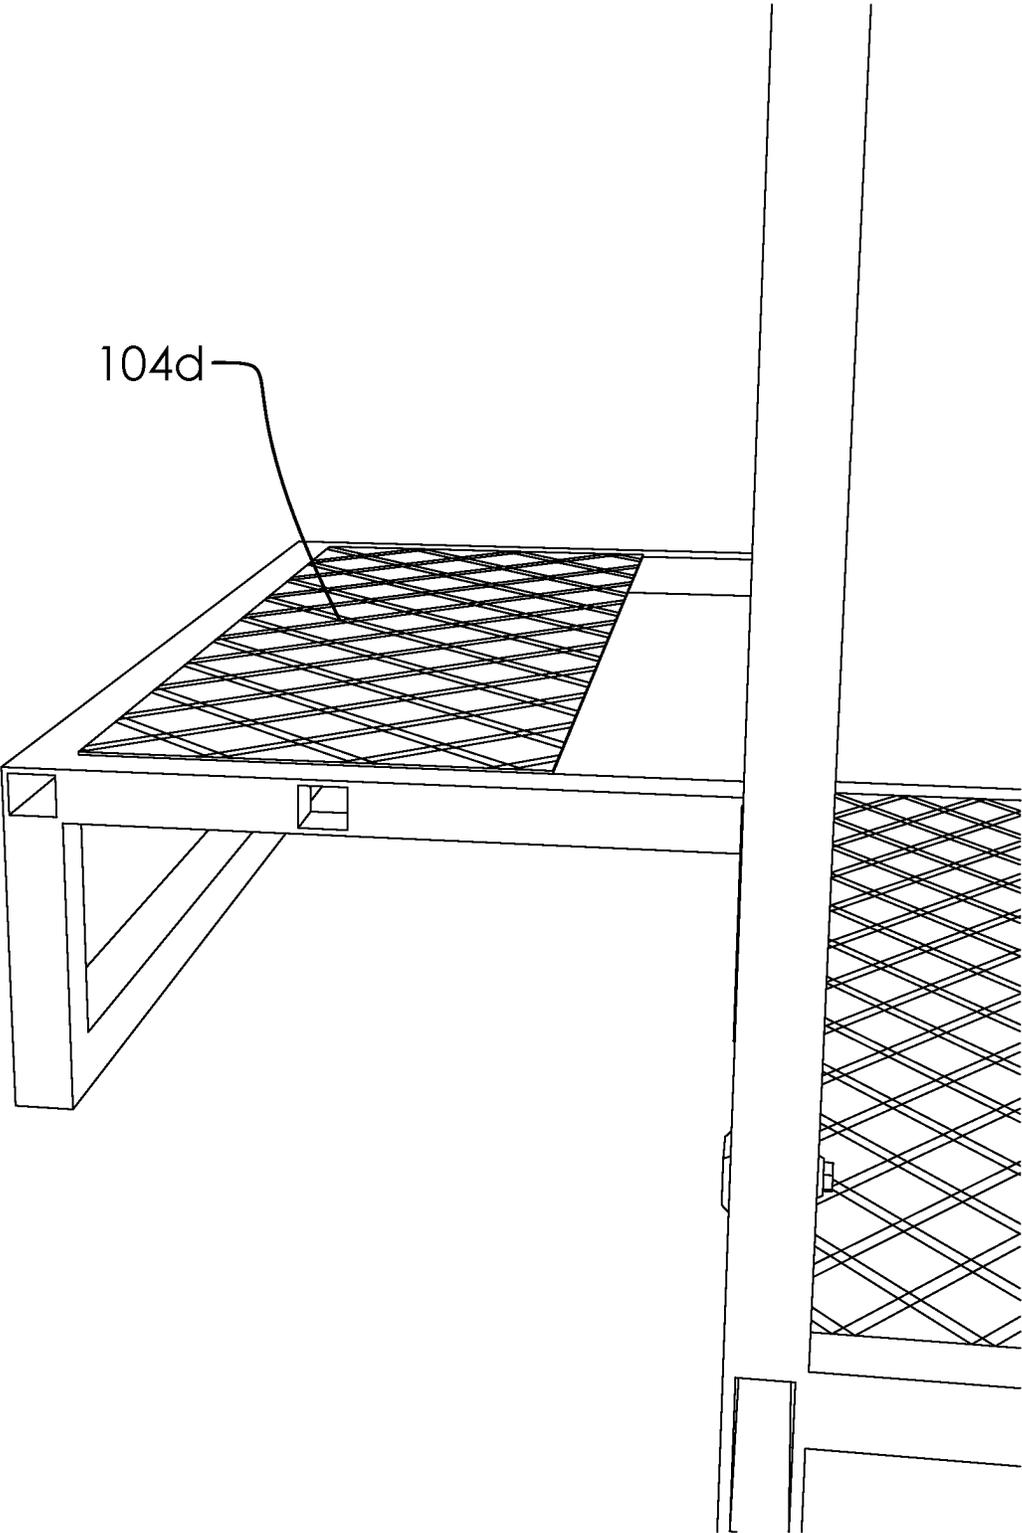


Fig. 4E

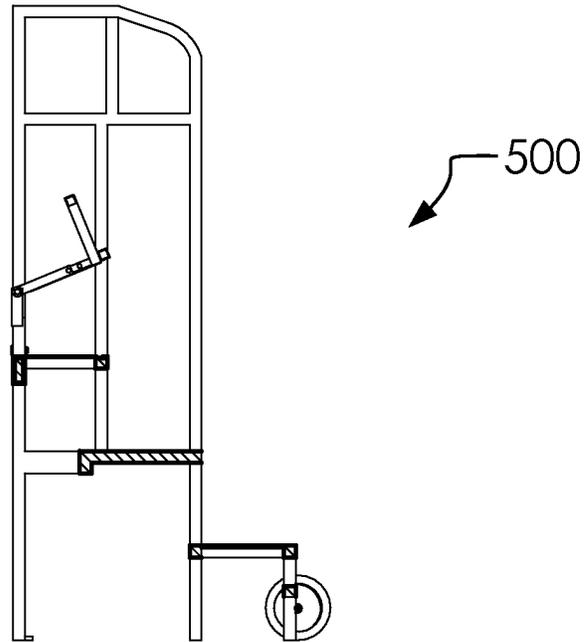


Fig. 5A

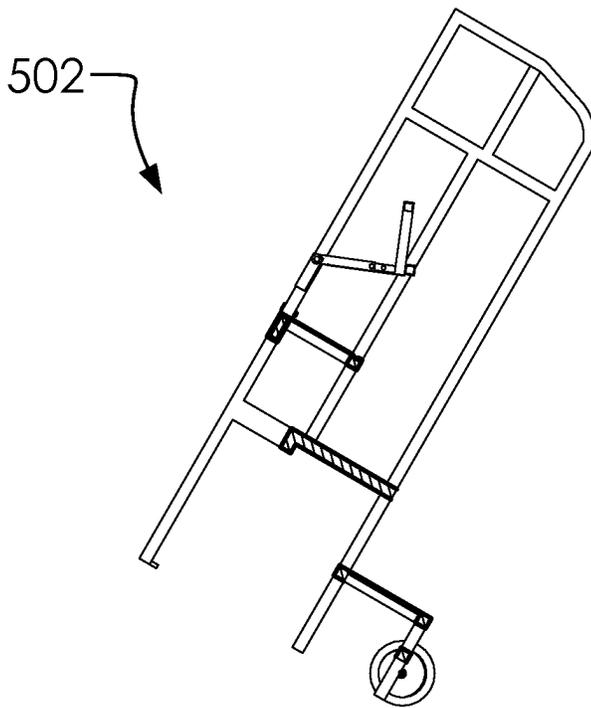


Fig. 5B

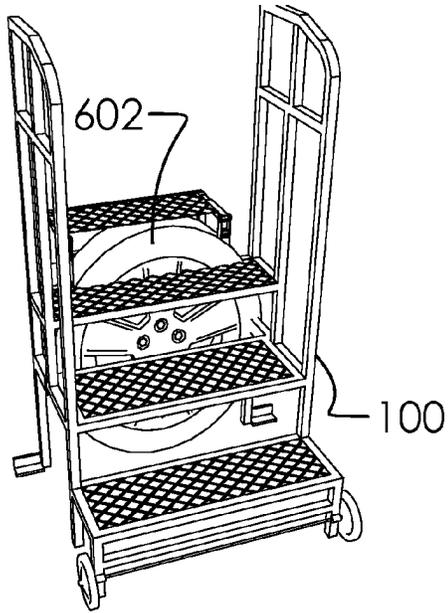


Fig. 6A

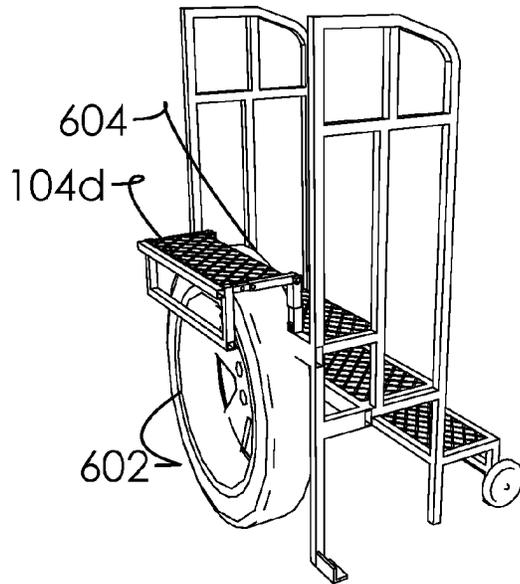


Fig. 6B

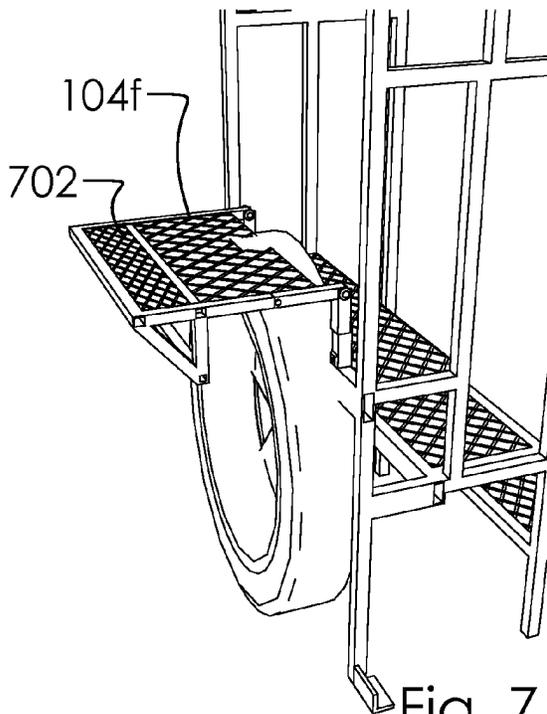


Fig. 7A

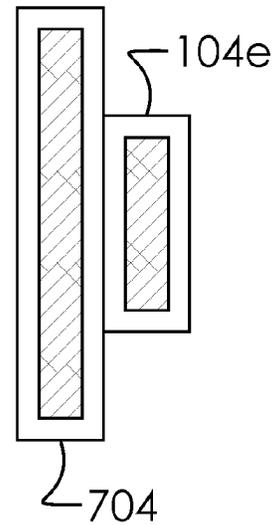


Fig. 7B

## TIRE STEP SYSTEM AND METHOD

## BACKGROUND

The current disclosure relates generally to an improved tire step system and method. Examples of truck steps can be found in U.S. Patent or U.S. Pat. No. 5,669,463, Ser. No. 10/905,670, D376,784, Ser. No. 12/404,639, U.S. Pat. No. 6,044,928. None of the known patents are seen to anticipate the current claims.

## SUMMARY

A vehicle step is disclosed comprising a frame and a plurality of steps. Said vehicle step comprises a first side, a second side, a front, and a back. Said frame supports said plurality of steps. Said plurality of steps comprise, at least, a first step and an adjustable step. Said first step serves as a platform for a user of said vehicle step to gain access to said adjustable step. Said adjustable step comprises a one or more hinges. Said adjustable step is rotatably attached to said frame such that said back of said vehicle step can be placed near a wheel, and said adjustable step can rotate on said one or more hinges over and rest on a top portion of said wheel.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1A, 1B, 1C 1D and 1E illustrate a perspective overview, an elevated first side view, an elevated second side view, an elevated front view of a vehicle step and an isometric elevated overview.

FIGS. 2A, 2B and 2C illustrate a perspective overview, an elevated side view and an elevated front view of said frame.

FIG. 3 illustrates a perspective overview of a cross-section view of said vehicle step.

FIGS. 4A and 4B illustrate a perspective view of an adjustable step in a horizontally contracted position and an expanded position, respectively.

FIGS. 4C and 4D illustrate a perspective view of said adjustable step in a vertically expanded position and a retracted position, respectively.

FIG. 4E illustrates a detailed perspective overview of said adjustable step.

FIGS. 5A and 5B illustrate a left side view of said vehicle step with said adjustable step retracted and said vehicle step in movement, respectively.

FIGS. 6A and 6B illustrate a perspective overview and a perspective rear view said vehicle step aligned with a wheel.

FIGS. 7A and 7B illustrate a perspective rear view said vehicle step with an adjustable step, and an elevated top view of an adjustable step.

## DETAILED DESCRIPTION

Described herein is a vehicle step system and method. The following description is presented to enable any person skilled in the art to make and use the invention as claimed and is provided in the context of the particular examples discussed below, variations of which will be readily apparent to those skilled in the art. In the interest of clarity, not all features of an actual implementation are described in this specification. It will be appreciated that in the development of any such actual implementation (as in any development project), design decisions must be made to achieve the designers' specific goals (e.g., compliance with system- and business-related constraints), and that these goals will vary from one implementation to another. It will also be appreciated that such devel-

opment effort might be complex and time-consuming, but would nevertheless be a routine undertaking for those of ordinary skill in the field of the appropriate art having the benefit of this disclosure. Accordingly, the claims appended hereto are not intended to be limited by the disclosed embodiments, but are to be accorded their widest scope consistent with the principles and features disclosed herein.

FIGS. 1A, 1B, 1C 1D and 1E illustrate a perspective overview, an elevated first side view, an elevated second side view, an elevated front view of a vehicle step **100** and an isometric elevated overview. In one embodiment, said vehicle step **100** can permit ease of access to serviceable areas of vehicles (such as semi-trucks) by using a tire of a vehicle for support. In one embodiment, said vehicle step **100** can comprise a frame **101** comprising a wheel assembly **102**, a plurality of steps and a one or more handrails. In one embodiment, said plurality of steps can comprise a first step **104a**, a second step **104b**, a third step **104c** and an adjustable step **104d**. In one embodiment, said one or more handrails can comprise a first handrail **106a** and a second handrail **106b**. In one embodiment, said one or more handrails can comprise a portion of said frame **101**. In one embodiment, said plurality of steps can attach to said frame **101**. In one embodiment, said frame **101** can comprise a one or more legs comprising a first leg **108a**, a second leg **108b**, a third leg **108c**, and a fourth leg **108d**. In one embodiment, said one or more legs can comprise a one or more feet comprising a first foot **110a** and a second foot **110b** which can be attached to the bottom of said first leg **108a** and said fourth leg **108d**, respectively. In one embodiment, said one or more feet can provide further stabilization of said vehicle step **100**. In one embodiment, said wheel assembly **102** can comprise a first wheel **112a** and a second wheel **112b** connected by an axle **114**. In one embodiment, said wheel assembly **102** can attach to said frame **101** at the base of said third step **104c**. In one embodiment, said wheel assembly can permit said vehicle step **100** to be transported without lifting said vehicle step **100** off the ground. In one embodiment, said plurality of steps can be separated by a one or more step heights (comprising a first height **116a**, a second height **116b**, a third height **116c** and a fourth height **116d**). In one embodiment, said one or more step spacings can all be equal pursuant to OSHA regulations. Likewise, said plurality of steps can each comprise equal width and depth. In one embodiment, said first height **116a**, said second height **116b**, said third height **116c** can be equal, and said fourth height **116d** can be variable, as discussed below, and therefore can be set to be equal to said first height **116a**. In one embodiment, said plurality of steps can each comprise a step depth (said first step **104a** can comprise a first step depth **118a**, said second step **104b** can comprise a second step depth **118b**, said third step **104c** can comprise a third step depth **118c**, and said adjustable step **104d** can comprise a fourth step depth **118d**), as illustrated. In one embodiment, said first step depth **118a**, said second step depth **118b** and said third step depth **118c** can be substantially identical to said **116a-116c**; consequently, a slope **120** of said plurality of steps can be about 45 degrees.

Said vehicle step **100** comprises a first side **130a**, a second side **130b**, a front **132a** and a back **132b**.

FIGS. 2A, 2B and 2C illustrate a perspective overview, an elevated side view and an elevated front view of said frame **101**. In one embodiment, said frame **101** can comprise a one or more horizontal portions, a one or more vertical portions, a one or more step frames, said one or more legs. In one embodiment, said one or more step frames can comprise a first step frame **202**, a second step frame **204**, a third step frame **206**, and an adjustable step frame **208**. In one embodiment, said one or more step frames can comprise four of said

one or more horizontal portions arranged in a substantially rectangular pattern and further comprise a support across a central portion of said rectangular pattern. In one embodiment, said first step frame **202** can comprise a support **212**; said second step frame **204** can comprise a support **214**; and said third step frame **206** can comprise a support **216**. In one embodiment, said one or more vertical portions can comprise a first vertical portion **218a**, a second vertical portion **218b**, a third vertical portion **218c**, a fourth vertical portion **218d**, a fifth vertical portion **218e**, and a sixth vertical portion **218f**. In one embodiment, said one or more step frames can attach to said one or more vertical portions, as illustrated or as known in the art. In one embodiment, said one or more horizontal portions can comprise a cross bar **210** between said first vertical portion **218a** and said fourth vertical portion **218d**.

FIG. 3 illustrates a perspective overview of a cross-section view of said vehicle step **100**. Detailed versions of this cross-section view of said vehicle step **100** will be used for FIG. 4A-4E, as follows.

FIGS. 4A and 4B illustrate a perspective view of an adjustable step **104e** in a horizontally contracted position and a horizontally expanded position, respectively. In one embodiment, said plurality of steps can comprise said adjustable step **104e** which can be similar to said adjustable step **104d** described and illustrated above. In one embodiment, a bracket **402** can be attached to the end of said adjustable step **104e**. In one embodiment, said bracket **402** can limit movement of said vehicle step **100** by securing onto the inside wall of a supporting truck tire to prevent said vehicle step **100** from moving away. In one embodiment, said adjustable step **104e** adjustments can be secured by a fastener **404**. In one embodiment, said fastener **404** can be used on one or both sides of said adjustable step **104e**. In one embodiment, said fastener **404** can securely fixate said adjustable step **104e** at certain positions based on the location of a plurality of adjustment holes (such as an adjustment hole **406a** and an adjustment hole **406b**). In one embodiment, more or less of said plurality of adjustment holes may be used to include one or more adjustable lengths of said adjustable step **104e**. In one embodiment, said adjustable step **104d** can comprise an outer tubing **420** and an inner tubing **422**. In one embodiment, said adjustable step **104e** can be adjusted horizontally by disengaging said fastener **404**, pushing or pulling said adjustable step **104e** to desired position, and locking said adjustable step **104e** into said plurality of adjustment holes. In one embodiment, said adjustable step **104e** can be adjusted to permit proper clearance of said bracket **402** over a width of a tire. In one embodiment, said adjustable step **104e** can comprise a one or more hinges, which can comprise a first hinge **408a** and a second hinge **408b**. Said adjustable step **104d** can comprise an outer tubing **430a** and an inner tubing **430b**; which function in a telescoping manner. For example, in one embodiment, said inner tubing **422** can comprise a smaller external width and height (external dimensions) than said outer tubing **420** has as internal width and height, as illustrated. Thus, said inner tubing **422** can be configured to selectively slide into and out of said outer tubing **420**. In one embodiment, said plurality of adjustment holes can be used to affix said inner tubing **422** to said outer tubing **420**, as is known in the art.

FIGS. 4C and 4D illustrate a perspective view of said adjustable step **104e** in a vertically horizontally expanded position and a vertically retracted position, respectively. In one embodiment, vertical positions of said adjustable step **104e** can be secured by a fastener **422a** and a fastener **422b**. In one embodiment, said one or more fasteners can securely fixate said adjustable step **104e** in predefined vertical posi-

tions based on the location of adjustment hole **424a**, adjustment hole **424b**, and adjustment hole **424c**. In one embodiment, said adjustment hole **424a**, said adjustment hole **424b**, and said adjustment hole **424c** can be mirrored so that said adjustment holes exist on both left and right sides of said adjustable step **104e**. In one embodiment, said adjustable step **104e** can be adjusted vertically by disengaging said fastener **422a** and said fastener **422b**, lifting or pushing down on said adjustable step **104e** to desired position based on said plurality of adjustment holes, and reengaging said fastener **422a** and said fastener **422b**. In one embodiment, said adjustable step **104e** can be adjusted to permit proper clearance of tire height in order to use said vehicle step **100**.

In one embodiment, said adjustable step **104e** is secured to remainder of said vehicle step **100** by said one or more hinges. In one embodiment, said vehicle step **100** is placed in desired position next to the truck wheel and said adjustable step **104e** can be rotated so that said bracket **402** is located next to the inside wall of the truck wheel and the top of said adjustable step **104e** (or said adjustable step **104d**) sits on or above the truck wheel. In one embodiment, said adjustable step **104e** can be rotated back so that said adjustable step **104e** sits above said first step **104a** so that said vehicle step **100** can be moved away from a truck or stored away.

FIG. 4E illustrates a detailed perspective overview of said adjustable step **104d**.

FIGS. 5A and 5B illustrate a left side view of said vehicle step **100** with said adjustable step **104e** retracted and said vehicle step **100** in movement, respectively. In one embodiment, said adjustable step **104e** can be retracted from truck tire and placed in a condensed configuration **500**. In one embodiment, said vehicle step **100** can be in said condensed configuration **500** prior and after use and during storage of said vehicle step **100**. In one embodiment, said vehicle step **100** can be in a movement configuration **502**. In one embodiment, said vehicle step **100** can be in said movement configuration **502** by first being in said condensed configuration **500**, holding said handrail **106**, tilting said vehicle step **100**, and moving said vehicle step **100** by using said wheel **112a** and said wheel **112b**. In one embodiment, said movement configuration **502** can be placed back into said condensed configuration **500** after said vehicle step **100** has reached a desired location.

FIGS. 6A and 6B illustrate a perspective overview and a perspective rear view said vehicle step **100** aligned with a wheel **602**. In one embodiment, said adjustable step **104d** can rotate on said one or more hinges and rest on a top portion **604** of said wheel **602**. In one embodiment, said adjustable step **104d** can be configured to selectively rotate on said one or more hinges on a substantially horizontal axis between a non-engaged configuration (such as illustrated in FIG. 5A) and an engaged configuration (as illustrated in FIG. 6A); said vehicle step **100** can be configured to selectively attach to said wheel **602** of a vehicle by aligning a portion of said plurality of steps next to said wheel **602** with said vehicle step **100** in said non-engaged configuration, rotating said adjustable step **104d** on said one or more hinges so as to set a portion of said adjustable step onto a top portion **604** of said wheel **602**, and placing said adjustable step **104d** into said engaged configuration.

FIGS. 7A and 7B illustrate a perspective rear view said vehicle step **100** with an adjustable step **104e**, and an elevated top view of an adjustable step **104f**.

Various changes in the details of the illustrated operational methods are possible without departing from the scope of the following claims. Some embodiments may combine the activities described herein as being separate steps. Similarly,

5

one or more of the described steps may be omitted, depending upon the specific operational environment the method is being implemented in. It is to be understood that the above description is intended to be illustrative, and not restrictive. For example, the above-described embodiments may be used in combination with each other. Many other embodiments will be apparent to those of skill in the art upon reviewing the above description. The scope of the invention should, therefore, be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled. In the appended claims, the terms “including” and “in which” are used as the plain-English equivalents of the respective terms “comprising” and “wherein.”

The invention claimed is:

**1.** A vehicle step comprising:  
 a frame and a plurality of steps;  
 said vehicle step comprises a first side, a second side, a front, and a back;  
 said frame supports said plurality of steps;  
 said plurality of steps comprise, at least, a first step and an adjustable step;  
 said first step serves as a platform for a user of said vehicle step to gain access to said adjustable step;  
 said adjustable step comprises a one or more hinges;  
 said adjustable step is rotateably attached to said frame;  
 said adjustable step is configured to selectively rotate on said one or more hinges on a substantially horizontal axis between a non-engaged configuration and an engaged configuration; and  
 said vehicle step is configured to selectively attach to a wheel of a vehicle by  
 aligning a portion of said plurality of steps next to said wheel with said adjustable step in said non-engaged configuration,  
 rotating said adjustable step on said one or more hinges so as to set a portion of said adjustable step onto a top portion of said wheel, and  
 placing said adjustable step into said engaged configuration; wherein, one or more handrails are arranged along said first side and said second side of said vehicle step; and said one or more handrails are attached to said frame; wherein said frame comprises one or more horizontal portions, one or more vertical portions, one or more step frames, and one or more legs; wherein, said one or more step frames comprise a first step frame and an adjustable step frame; said one or more step frames support said one or more steps; said first step frame supports said first step; said

6

adjustable step frame supports said adjustable step; said one or more vertical portions support said vehicle step at, at least, four corners of said frame; and said one or more step frames attach to said one or more vertical portions; wherein, said one or more step frames comprise four of said one or more horizontal portions arranged in a substantially rectangular pattern and further comprise a support across a central portion of said rectangular pattern; wherein, said adjustable step comprises a horizontally contracted position and an horizontally expanded position; said adjustable step comprises a plurality of adjustment holes and a fastener; said adjustable step comprises an outer tubing and an inner tubing; said inner tubing telescopes from within said outer tubing; said fastener selectively fixes said outer tubing to said inner tubing by aligning two among said plurality of adjustment holes and inserting said fastener therein; said horizontally contracted position comprises a larger portion of said inner tubing within said outer tubing, and said horizontally expanded position the inverse; said adjustable step comprises a vertically expanded position and a vertically retracted position; said adjustable step comprises a plurality of adjustment holes and a fastener; said adjustable step comprises an outer tubing and an inner tubing; said inner tubing telescopes from within said outer tubing; said fastener selectively fixes said outer tubing to said inner tubing by aligning two among said plurality of adjustment holes and inserting said fastener therein; and said retracted position comprises a larger portion of said inner tubing within said outer tubing, and said vertically horizontally expanded position the inverse.

**2.** The vehicle step of claim **1** further comprising:  
 a wheel assembly attached at said front of said vehicle step to provide a tool for moving said vehicle step; and  
 said wheel assembly is attached to a portion of a one or more vertical portions of said frame.

**3.** The vehicle step of claim **1** wherein:  
 said adjustable step comprises a three or more edges and a substantially planar shape;  
 said three or more edges comprise a rotating edge being aligned between said one or more hinges; and  
 said adjustable step rotates around said rotating edge when transitioning between said engaged configuration and said non-engaged configuration.

\* \* \* \* \*