



US009089375B2

(12) **United States Patent**
Smith et al.

(10) **Patent No.:** **US 9,089,375 B2**
(45) **Date of Patent:** **Jul. 28, 2015**

(54) **COMBINED INTRAMEDULLARY AND
EXTRAMEDULLARY SURGICAL AIMING
SYSTEM AND METHOD**

(58) **Field of Classification Search**
USPC 606/86 R, 86 B, 87, 104, 915
See application file for complete search history.

(71) Applicants: **Joel Smith**, San Diego, CA (US); **Aaron
Osborne**, Redding, CA (US); **Brian
Chalkin**, Tulsa, OK (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

(72) Inventors: **Joel Smith**, San Diego, CA (US); **Aaron
Osborne**, Redding, CA (US); **Brian
Chalkin**, Tulsa, OK (US)

4,465,065	A	8/1984	Gotfried
5,366,457	A	11/1994	McGuire et al.
5,458,654	A	10/1995	Tepic
5,658,283	A	8/1997	Huebner
5,853,415	A	12/1998	Bertin et al.
5,928,234	A	7/1999	Manspeizer
6,514,253	B1	2/2003	Yao
6,527,775	B1	3/2003	Warburton
6,579,293	B1	6/2003	Chandran
6,692,496	B1	2/2004	Wardlaw
6,706,046	B2	3/2004	Orbay et al.
6,746,453	B2	6/2004	Deloge et al.
7,488,323	B2	2/2009	Bacastow et al.
7,588,577	B2	9/2009	Fencl et al.
7,621,920	B2	11/2009	Claypool et al.

(73) Assignee: **Interfix, LLC**, Redding, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/306,683**

(22) Filed: **Jun. 17, 2014**

(65) **Prior Publication Data**

US 2015/0105779 A1 Apr. 16, 2015

Related U.S. Application Data

(60) Provisional application No. 61/890,240, filed on Oct.
12, 2013, provisional application No. 61/934,692,
filed on Jan. 31, 2014.

(51) **Int. Cl.**

A61B 17/68	(2006.01)
A61B 17/58	(2006.01)
A61B 17/60	(2006.01)
A61F 2/00	(2006.01)
A61F 2/46	(2006.01)
A61F 5/00	(2006.01)
A61B 17/80	(2006.01)
A61B 17/90	(2006.01)

(52) **U.S. Cl.**

CPC **A61B 17/808** (2013.01); **A61B 17/80**
(2013.01); **A61B 2017/90** (2013.01)

(Continued)

Primary Examiner — Sameh Boles


(74) *Attorney, Agent, or Firm* — Shannon L Warren

(57)

ABSTRACT

A surgical aiming system is disclosed comprising a one or more fixation plates, an aiming assembly, a one or more nails and a plurality of screws. Said aiming assembly comprising a channeling assembly and a plurality of channels. Said one or more fixation plates comprising a plurality of plate apertures capable of receiving a portion of said plurality of screws. Said plurality of channels in said aiming assembly are capable of aligning a portion of said plurality of screws with said plurality of plate apertures in a first fixation plate. Said plurality of channels receive and align said plurality of screws as they are secured to said first bone. Said first fixation plate being extramedullary attached to a portion of said surface of said first bone; and said plurality of channels of said aiming assembly being aligned to identify a one or more intramedullary locations within said first bone.

9 Claims, 27 Drawing Sheets

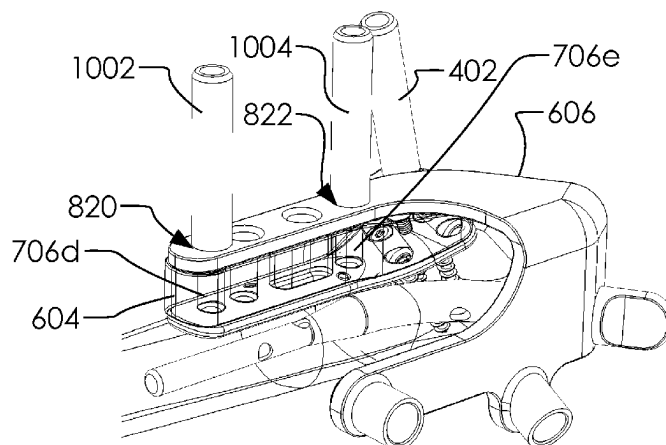

(56)

References Cited

U.S. PATENT DOCUMENTS

7,648,508	B2	1/2010	Lutz et al.	8,114,093	B2	2/2012	Matthys
7,686,808	B2	3/2010	Orbay et al.	8,142,432	B2	3/2012	Matityahu
7,727,236	B2	6/2010	Choe et al.	8,162,950	B2	4/2012	Digester et al.
7,771,441	B2	8/2010	Cerundolo	8,282,638	B2	10/2012	Choe et al.
7,833,230	B2	11/2010	Cerundolo	8,439,932	B2	5/2013	Sheffer
7,837,689	B2	11/2010	Leyden et al.	8,679,130	B2 *	3/2014	Smith et al. 606/96
8,034,056	B2	10/2011	Fencl et al.	2003/0055428	A1	3/2003	Swanson
				2003/0216742	A1	11/2003	Wetzler et al.
				2011/0106086	A1	5/2011	Laird

* cited by examiner

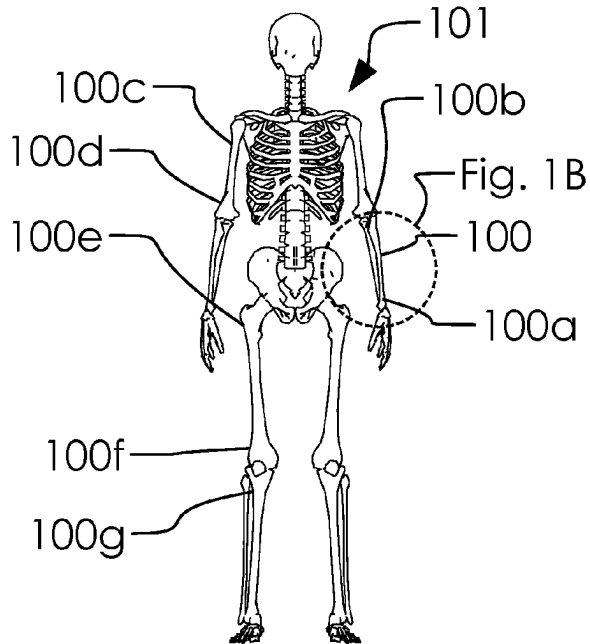


Fig. 1A

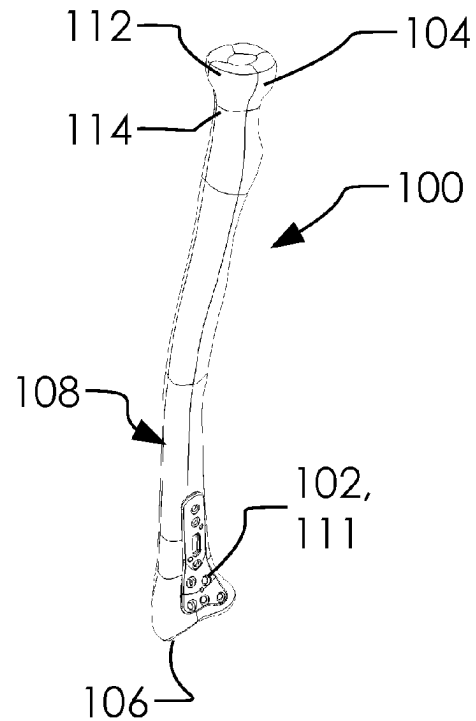


Fig. 1B

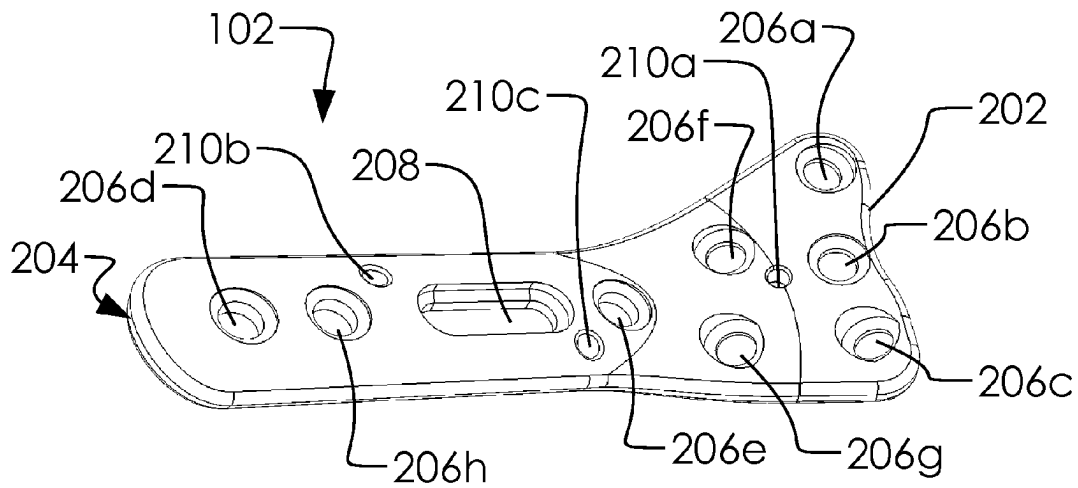


Fig. 2A

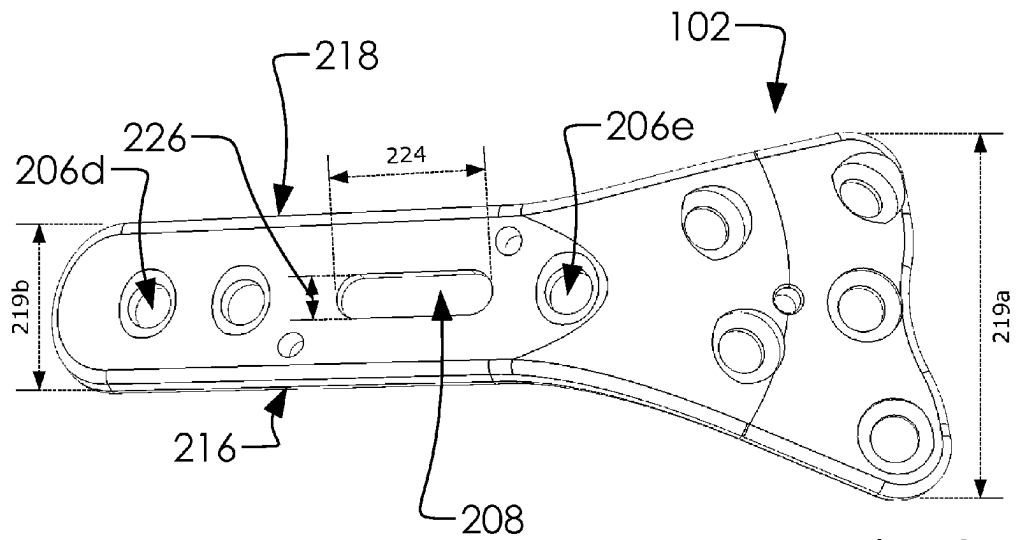


Fig. 2B

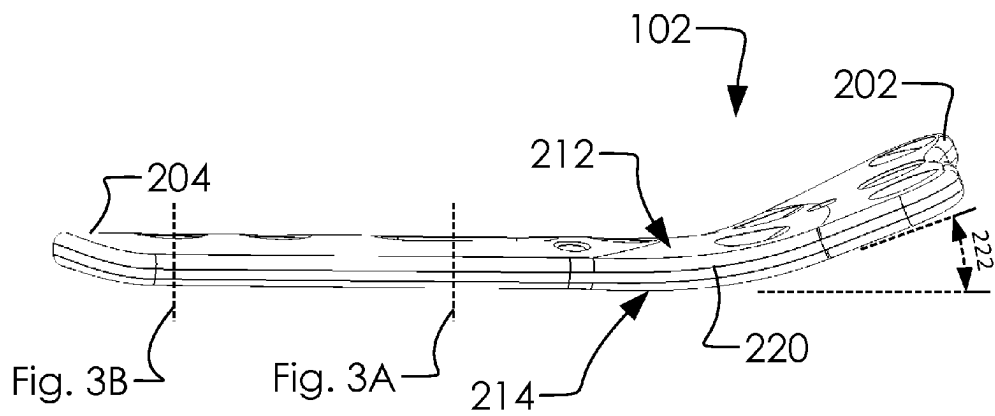


Fig. 2C

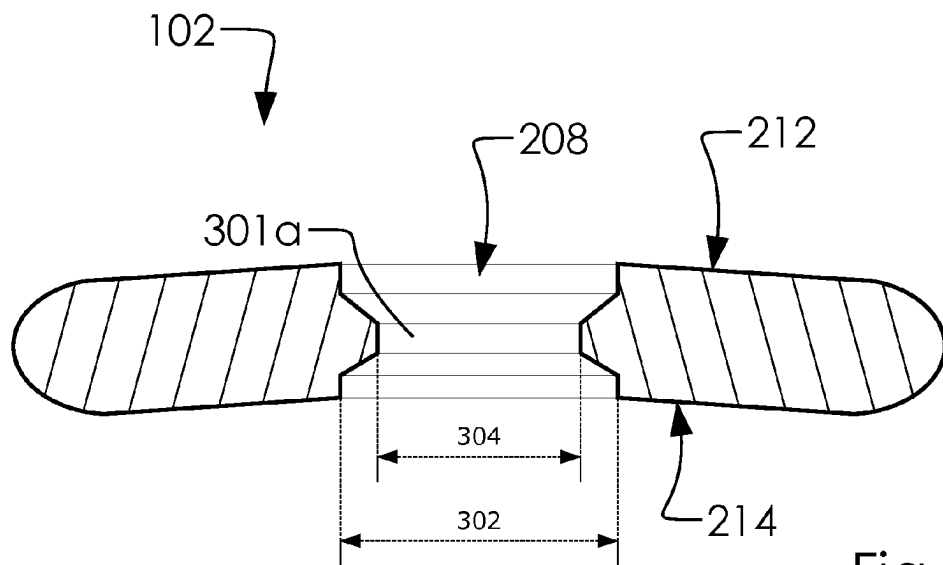


Fig. 3A

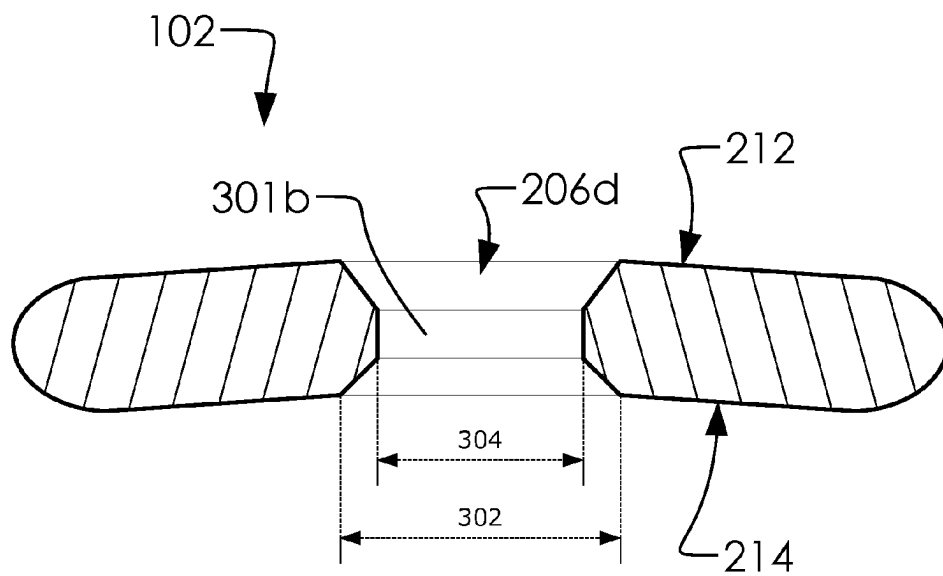
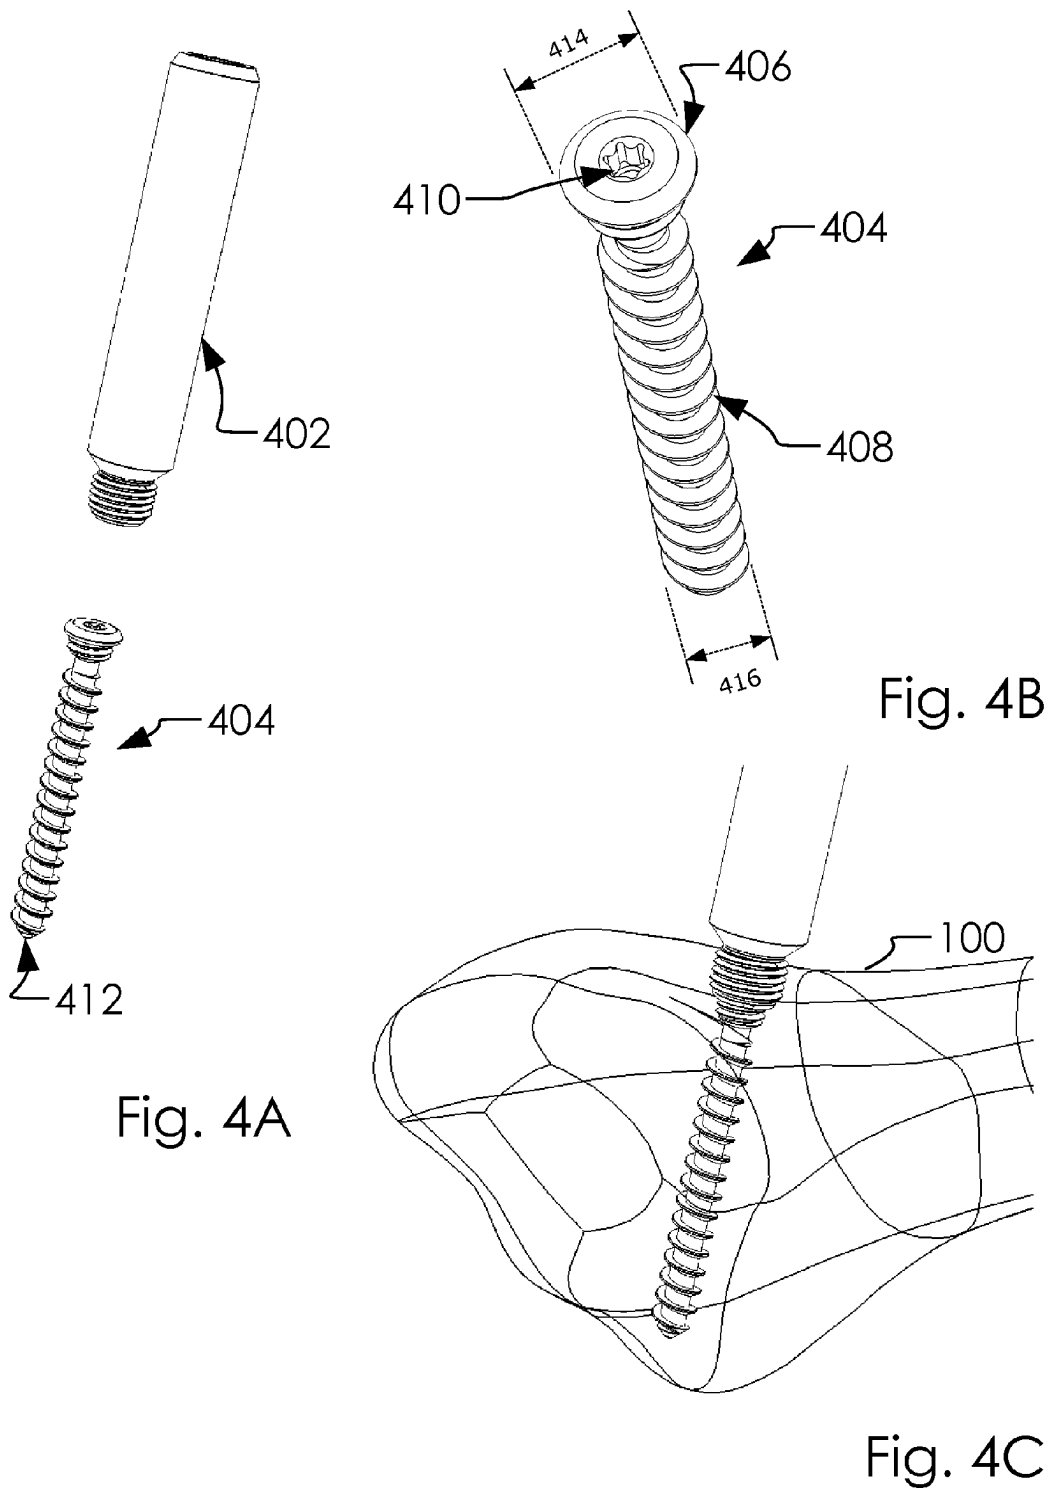


Fig. 3B



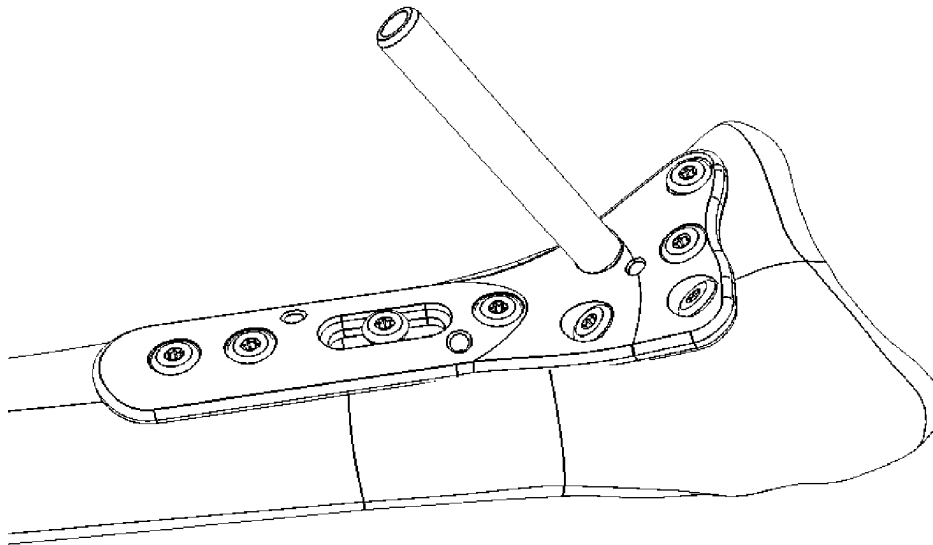


Fig. 5A

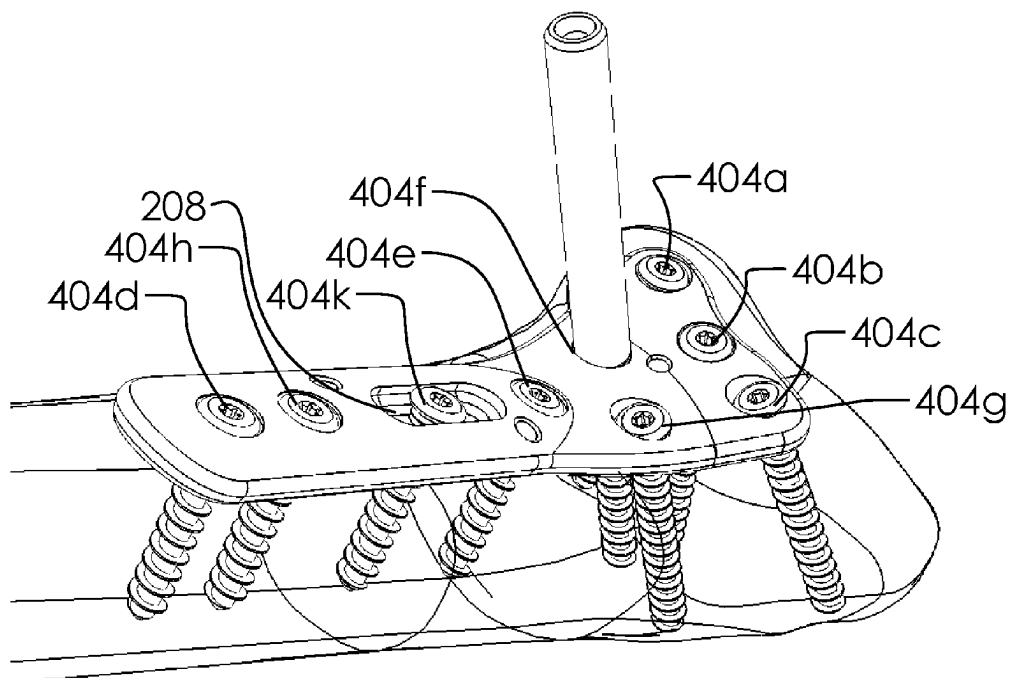
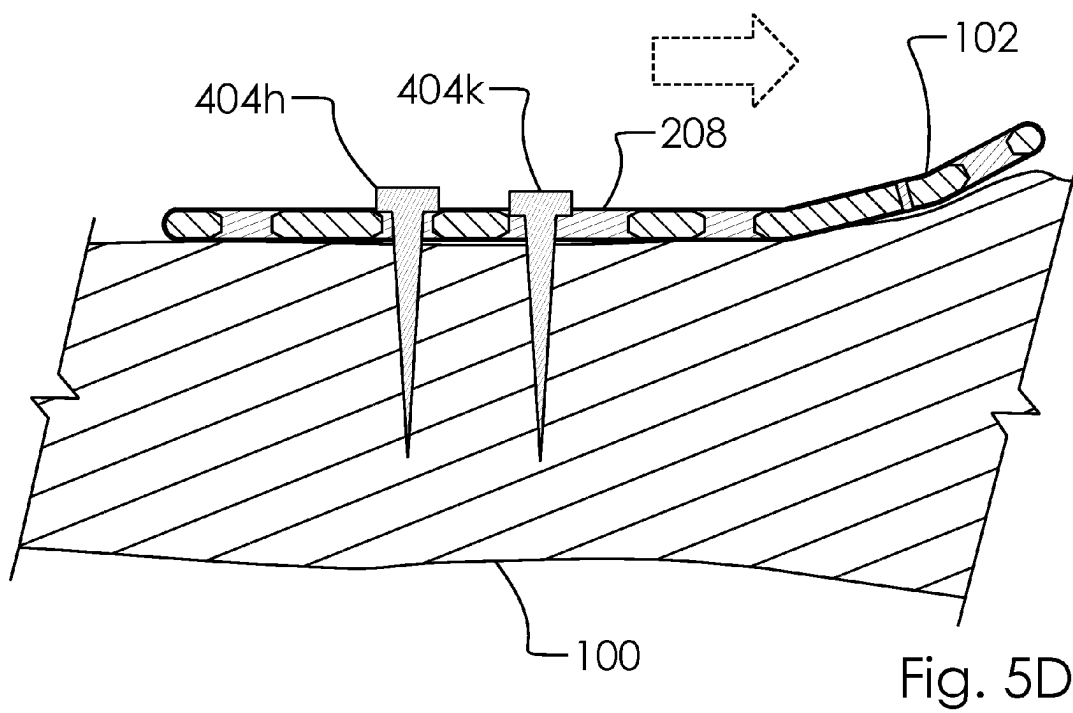
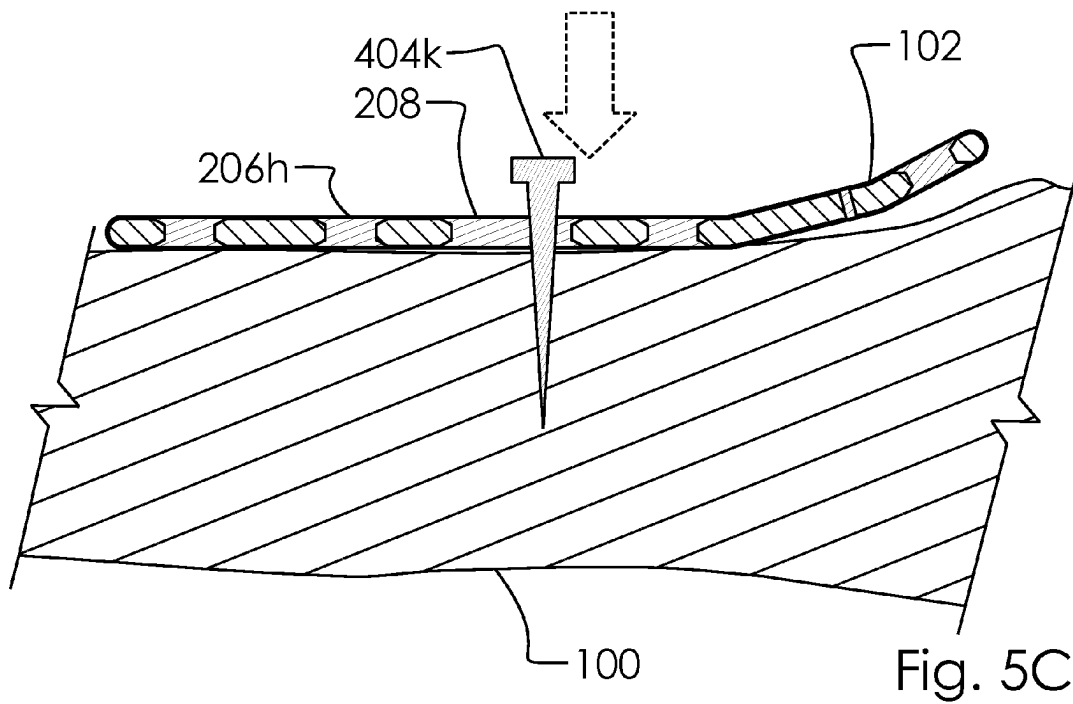


Fig. 5B



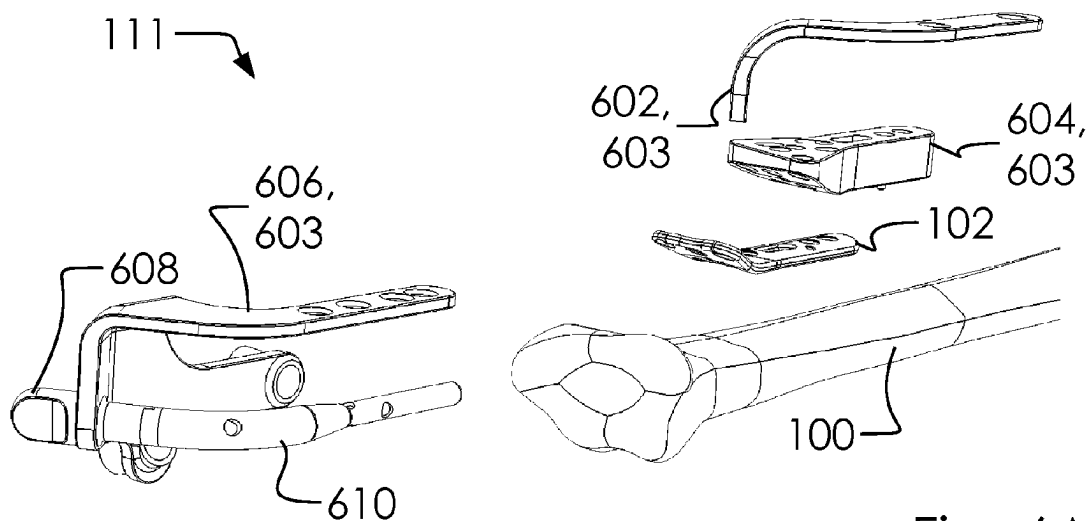


Fig. 6A

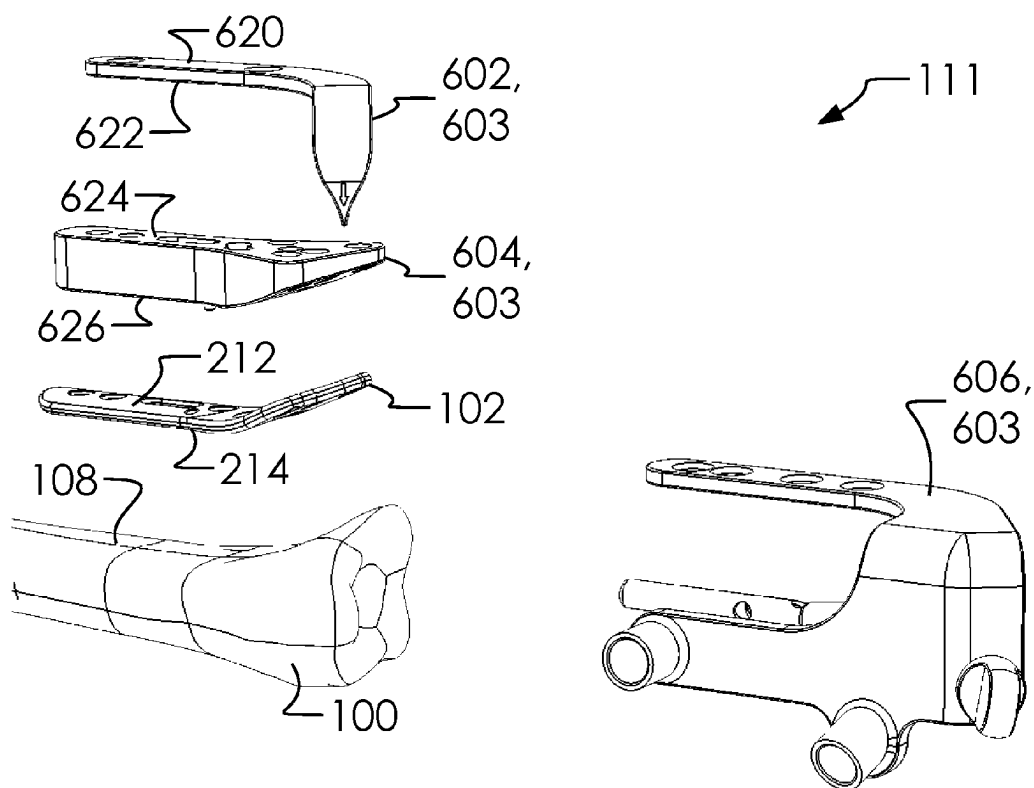


Fig. 6B

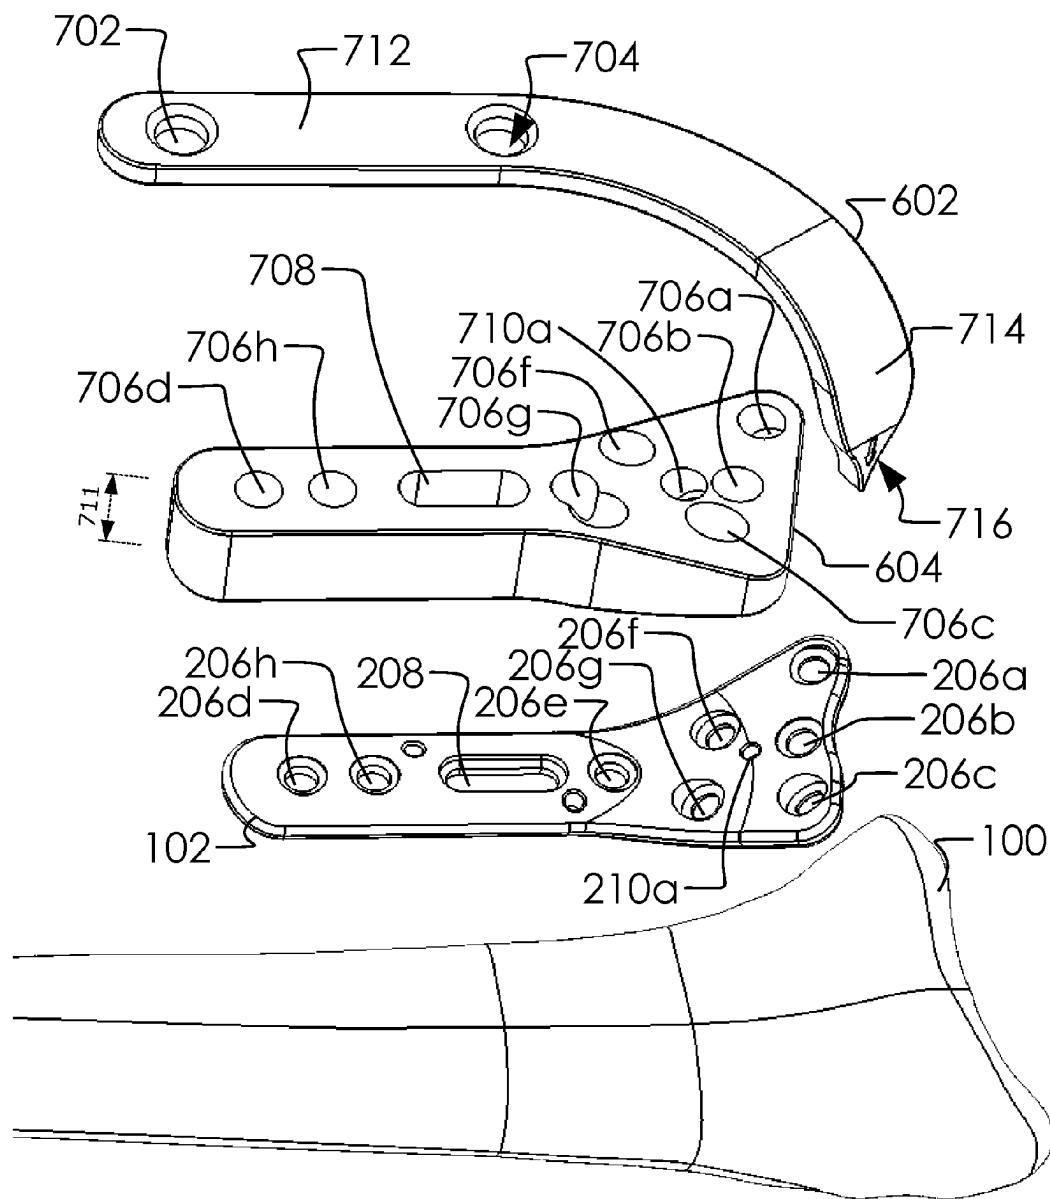


Fig. 7A

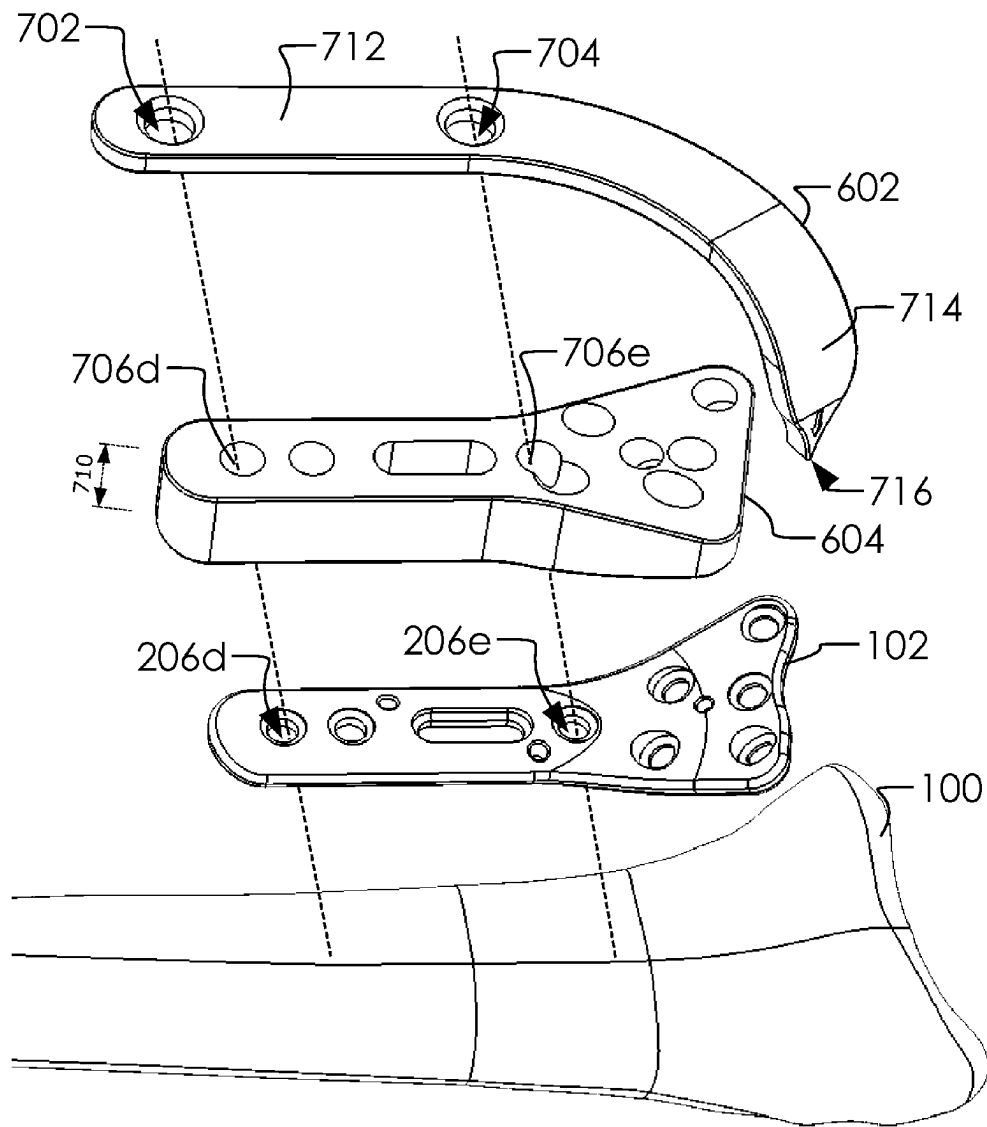


Fig. 7B

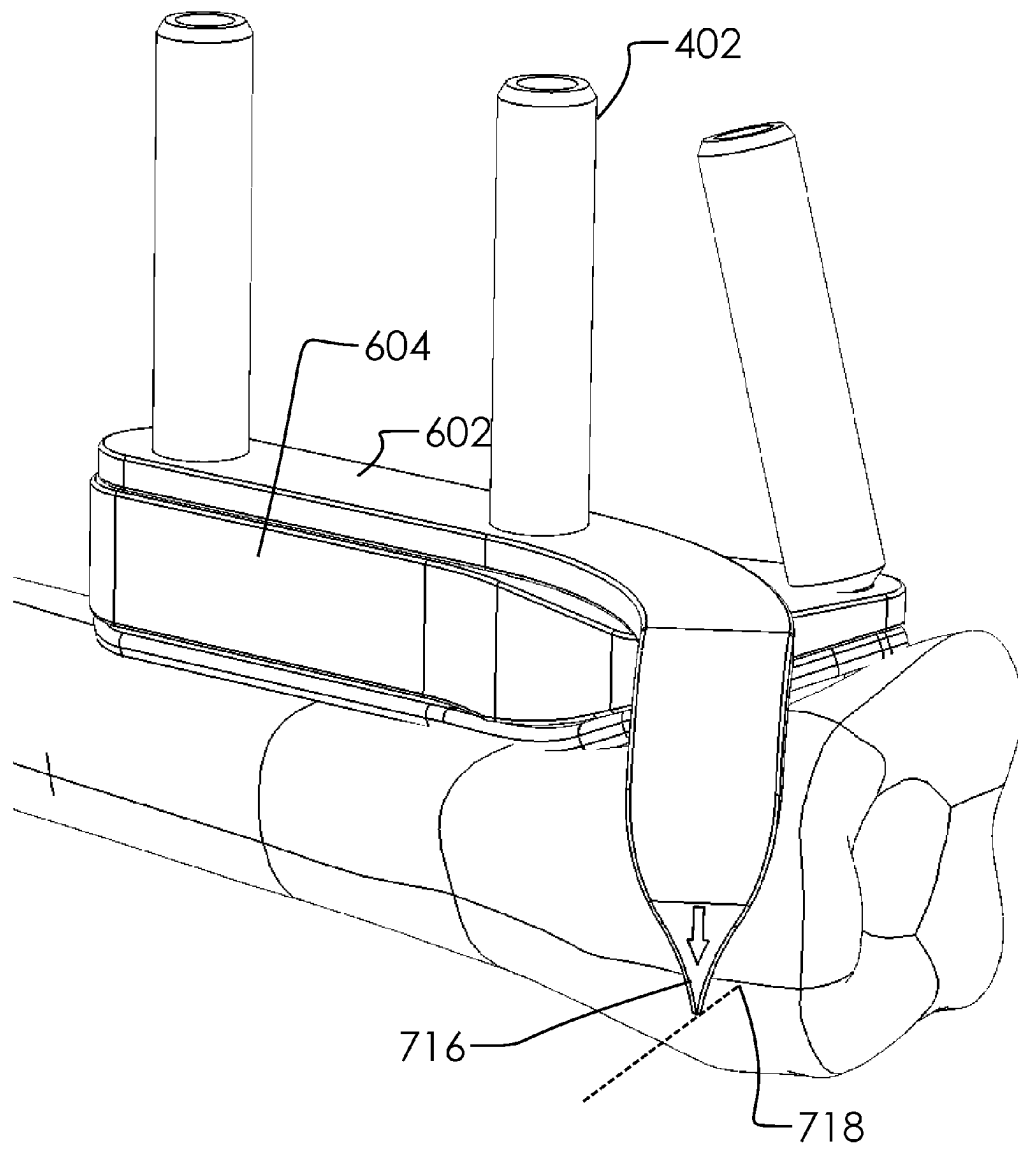


Fig. 7C

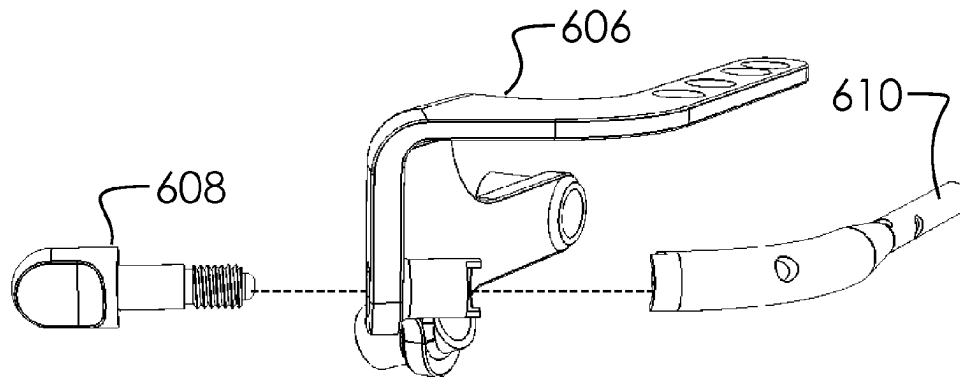


Fig. 8A

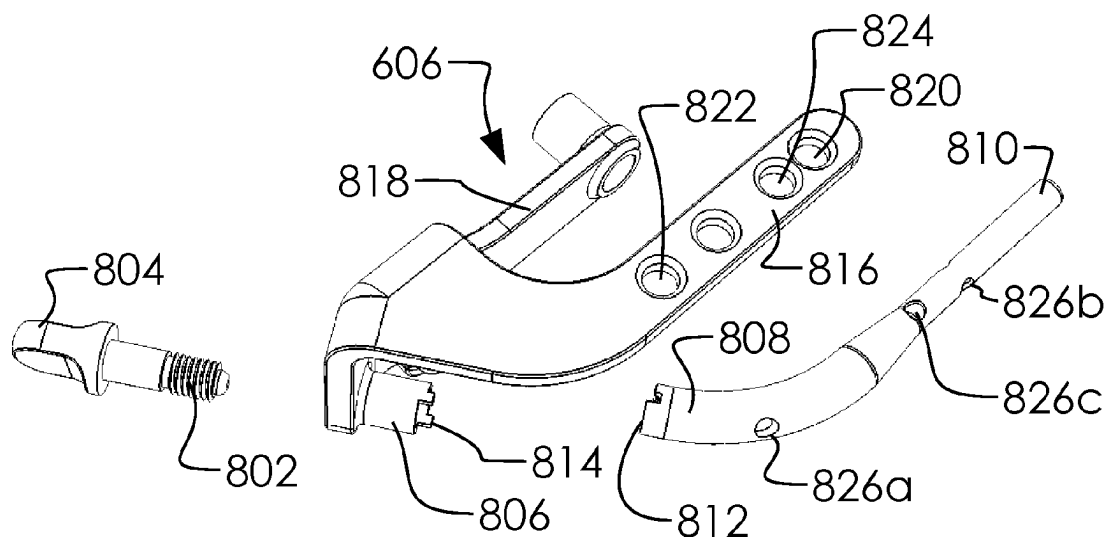


Fig. 8B

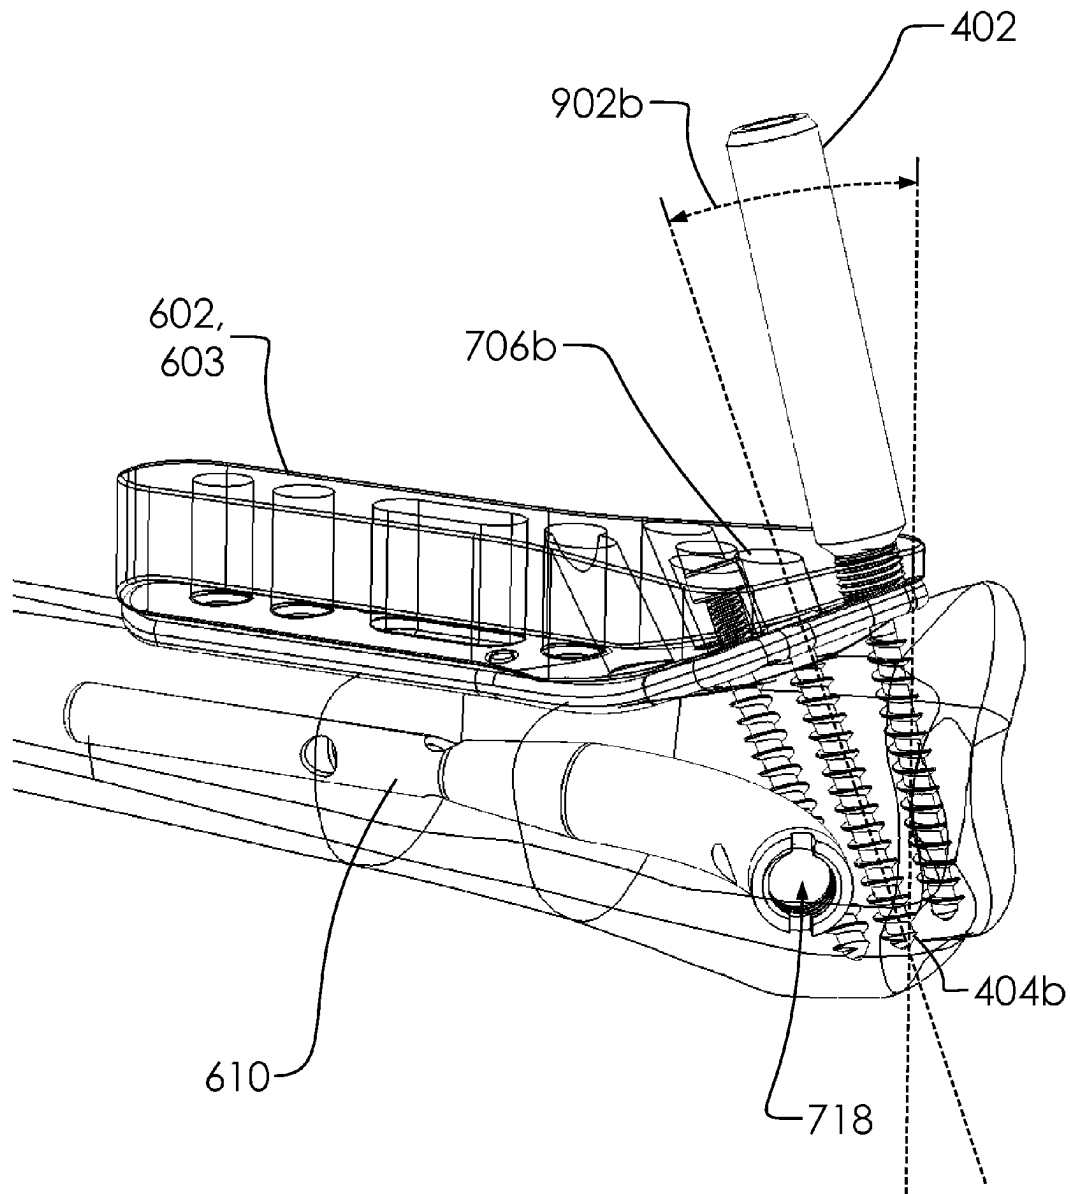


Fig. 9

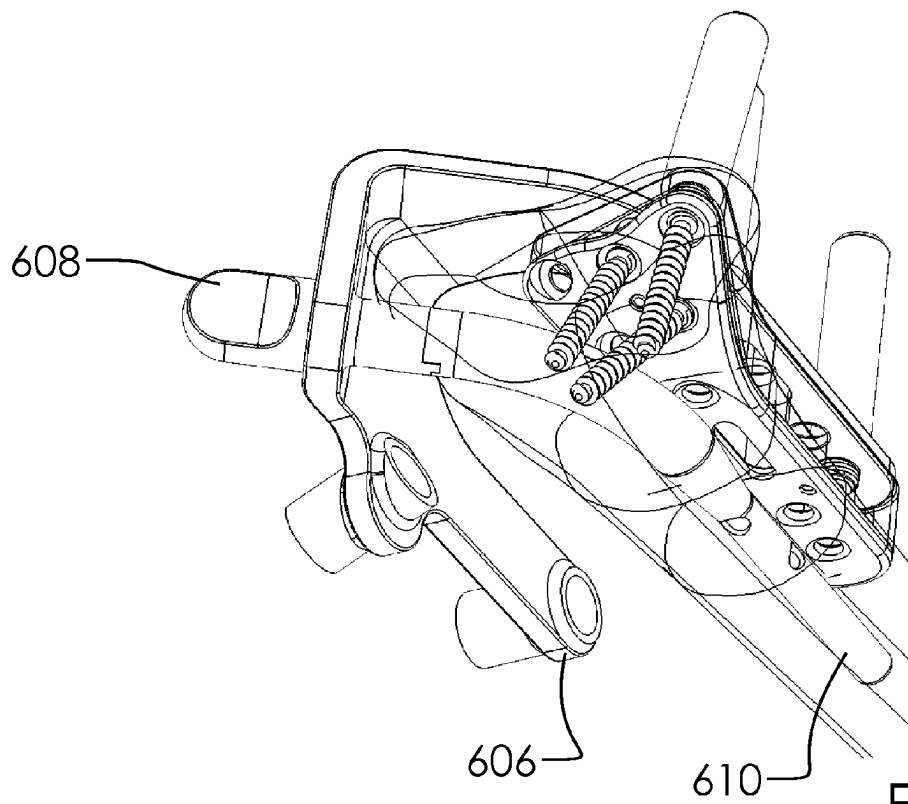


Fig. 10A

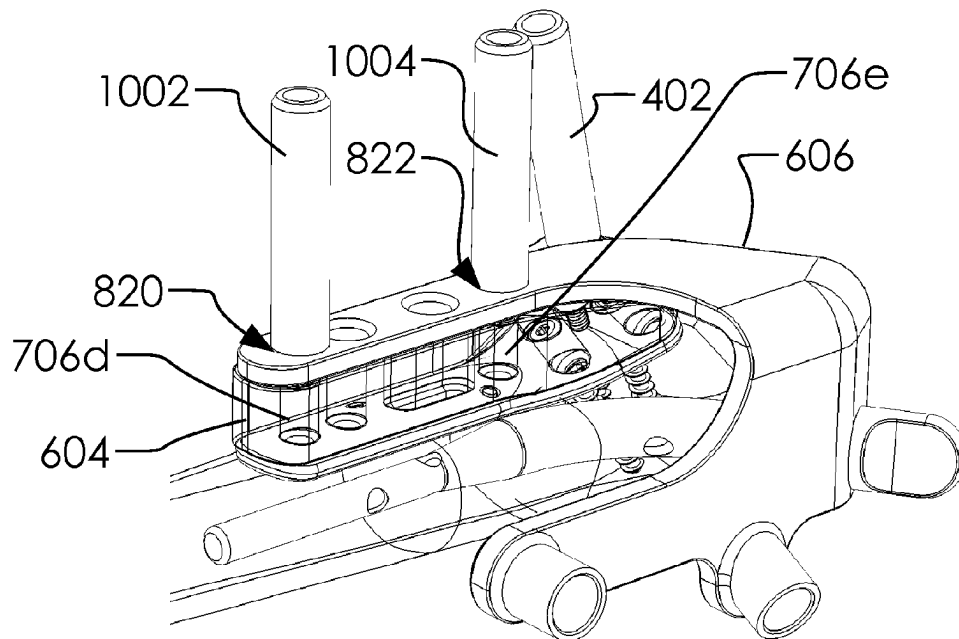
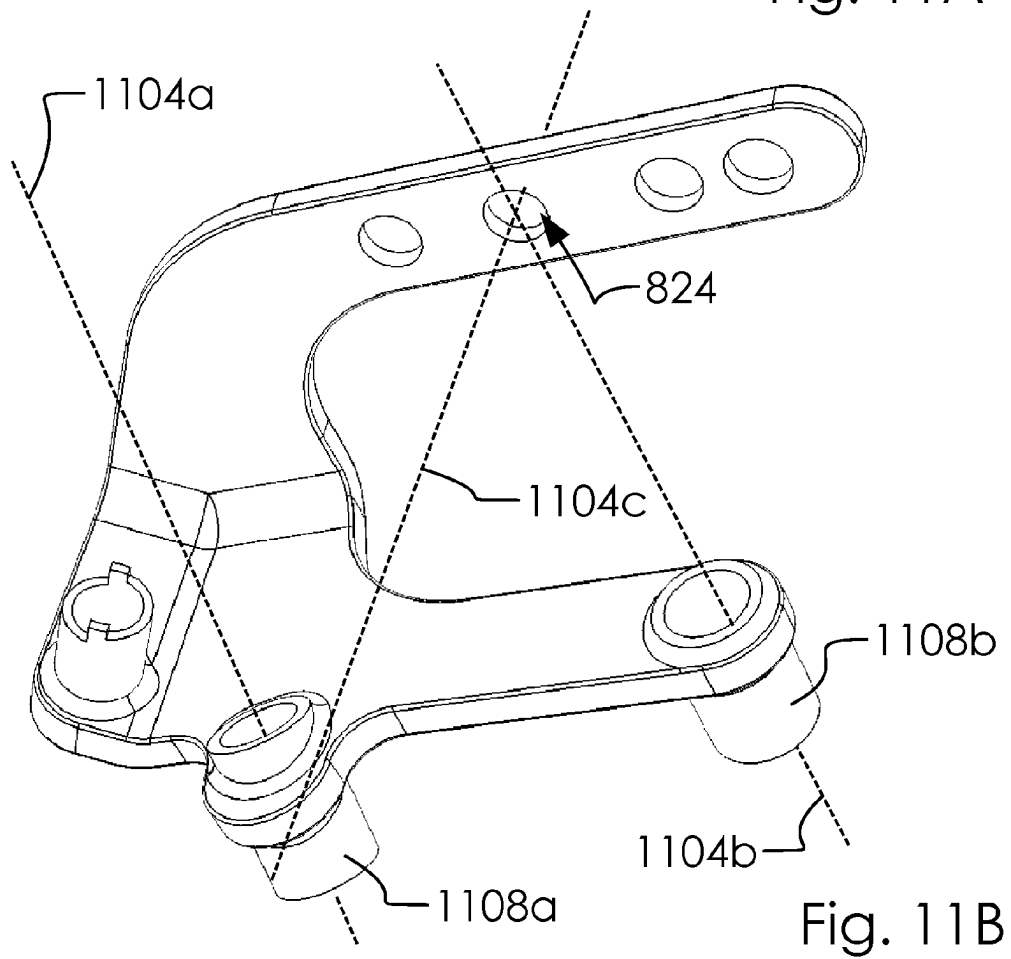
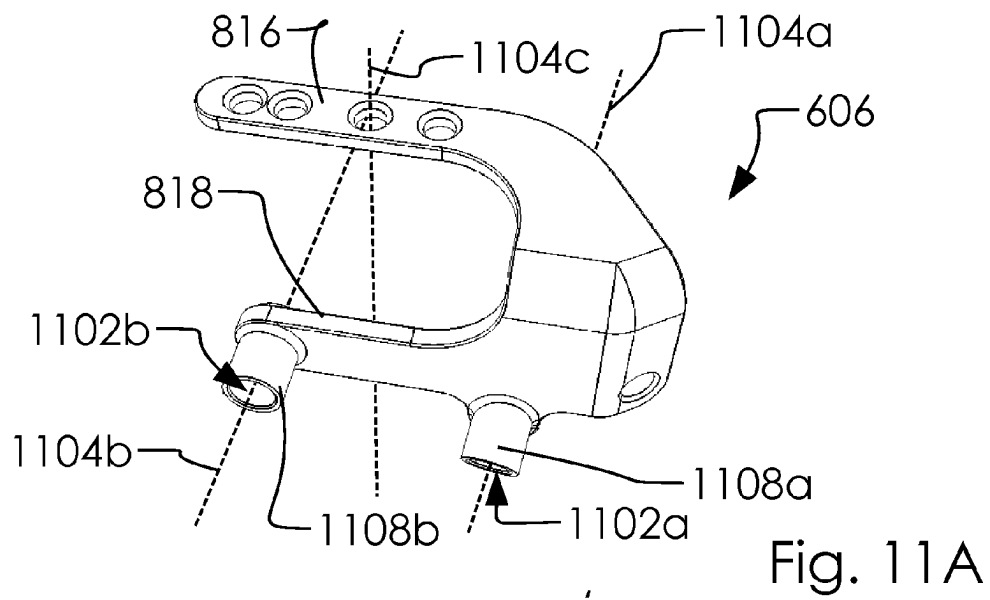


Fig. 10B



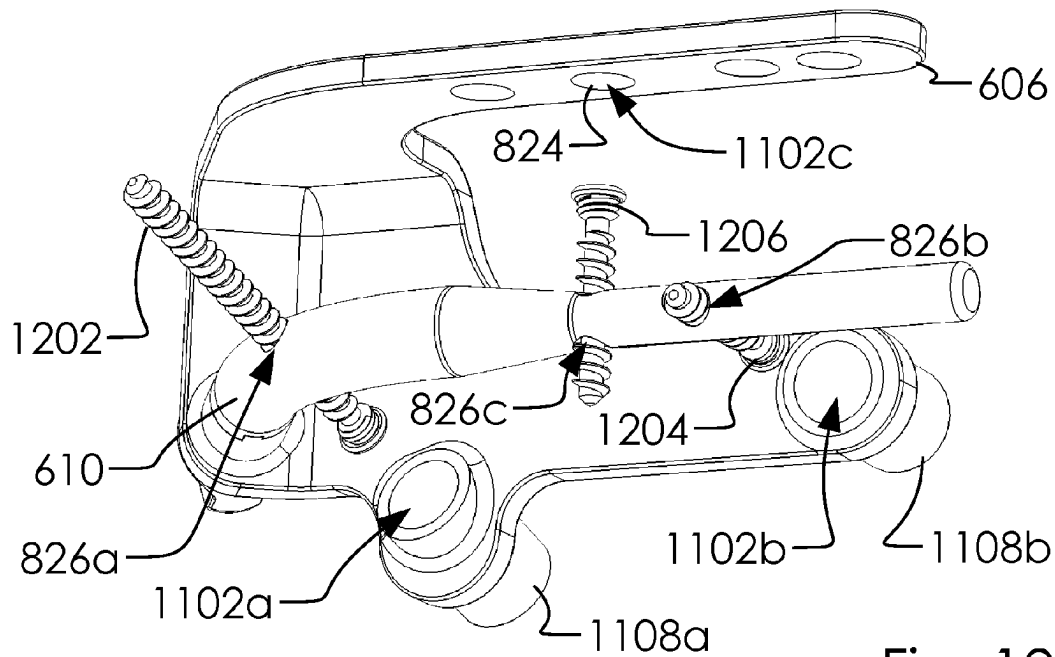


Fig. 12A

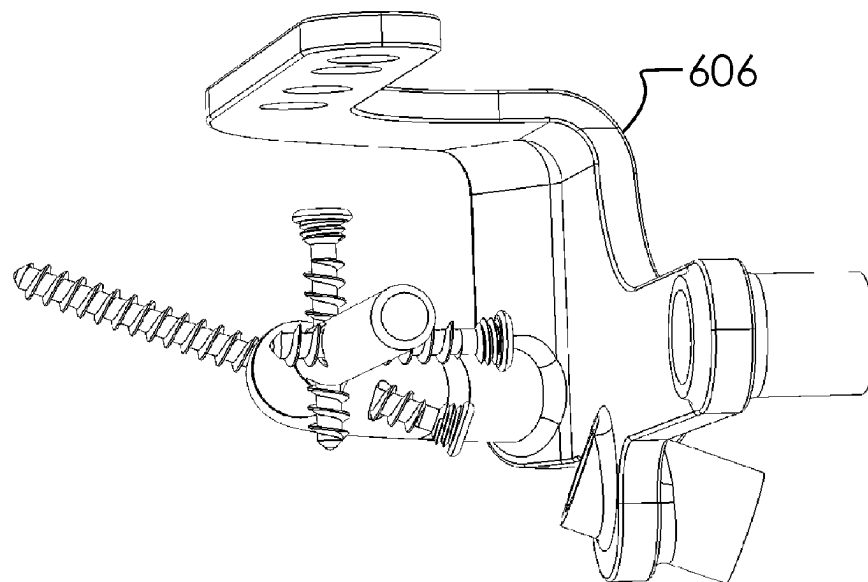


Fig. 12B

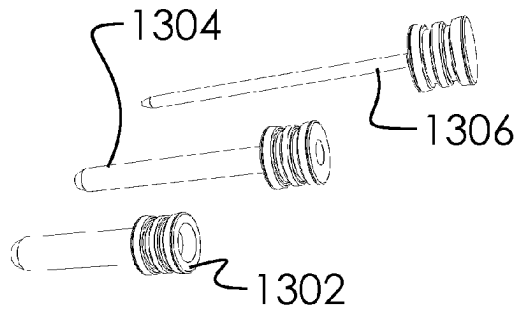


Fig. 13A

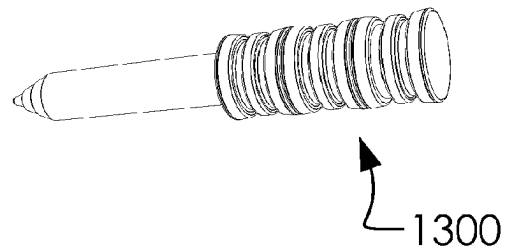


Fig. 13B

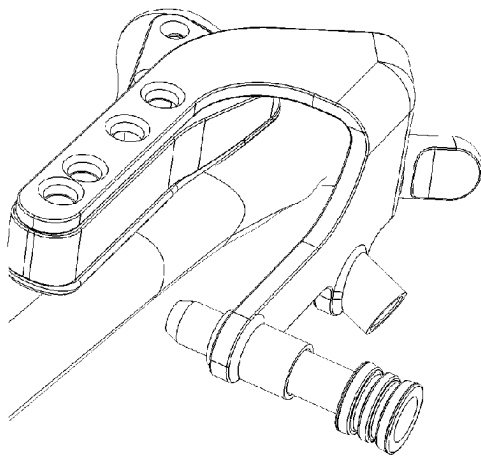


Fig. 13C

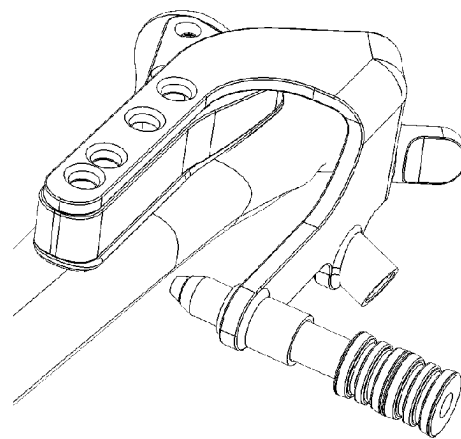


Fig. 13D

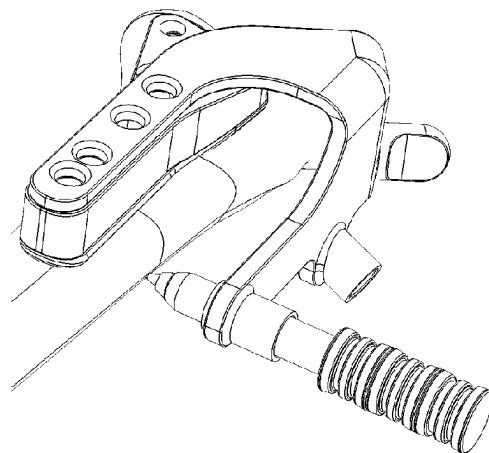


Fig. 13E

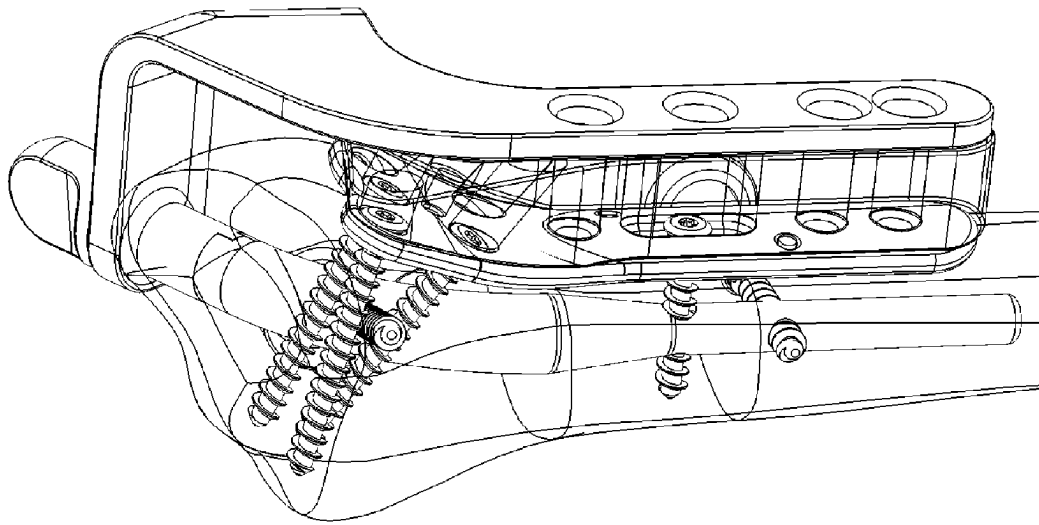


Fig. 14A

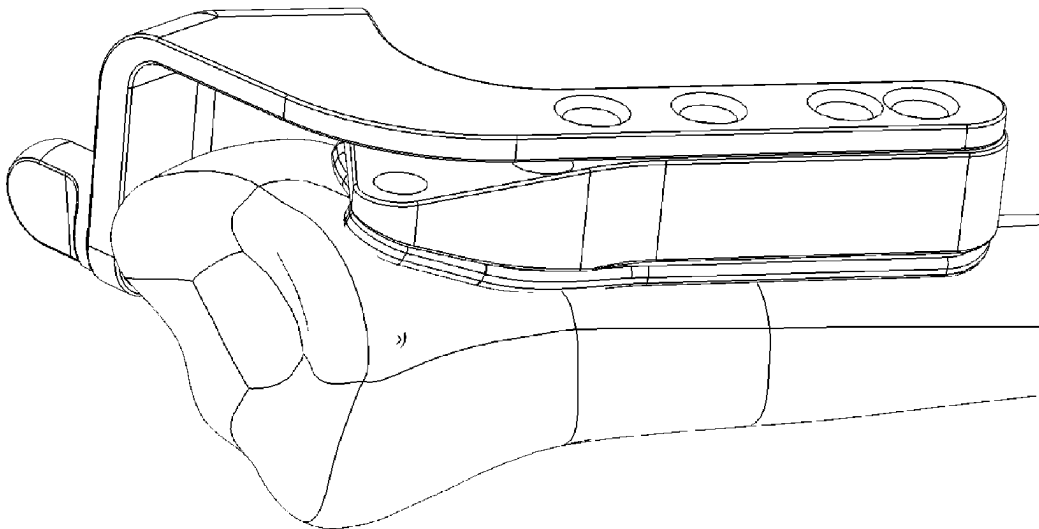


Fig. 14B

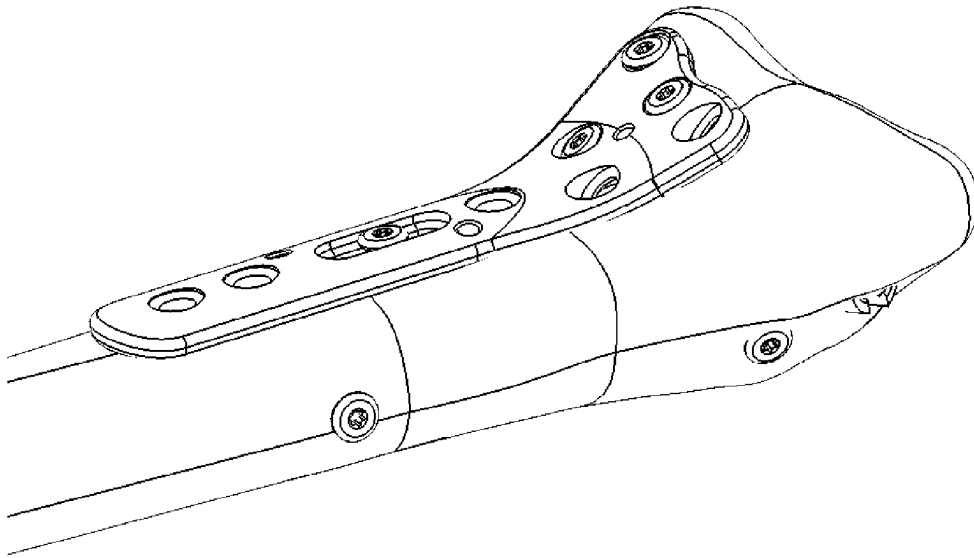


Fig. 15

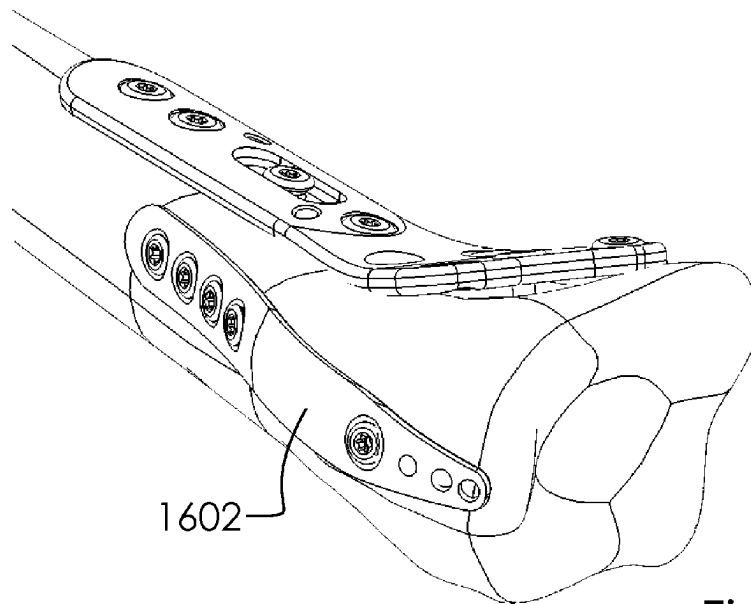


Fig. 16A

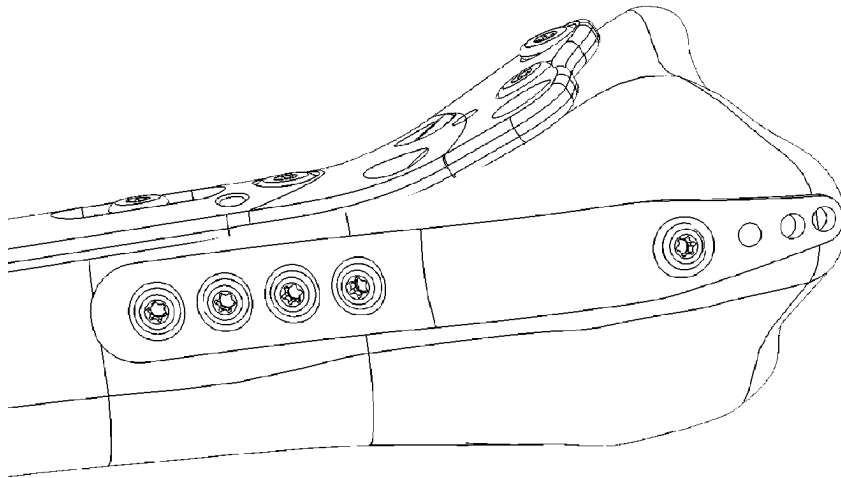


Fig. 16B

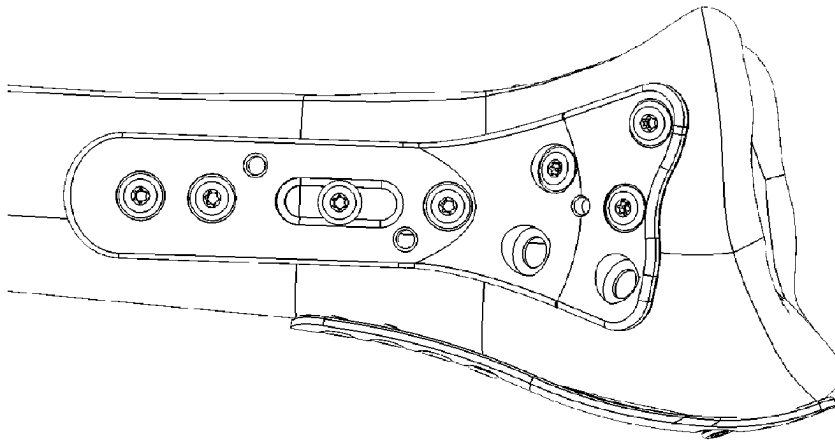


Fig. 16C

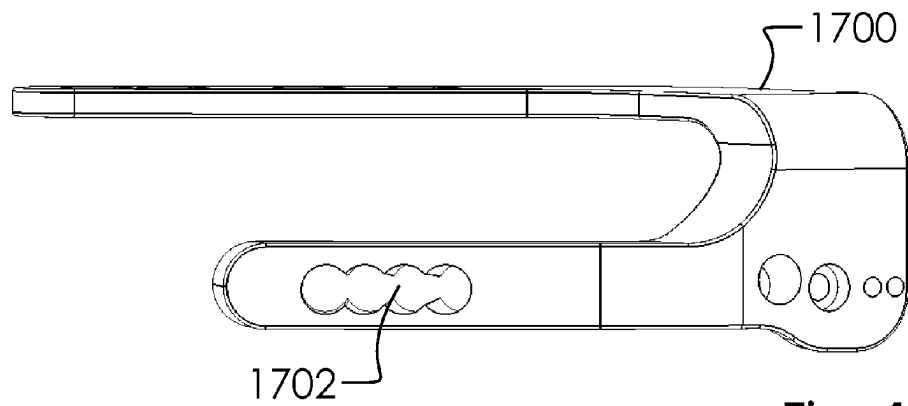


Fig. 17A

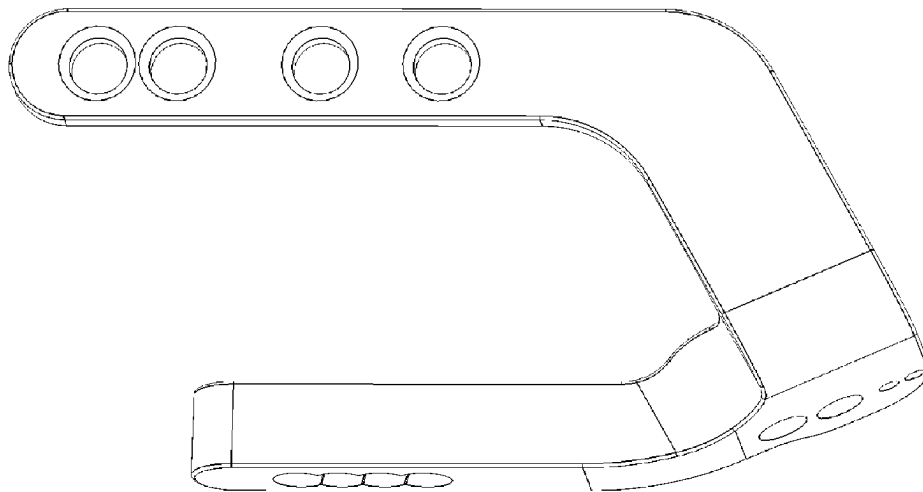


Fig. 17B

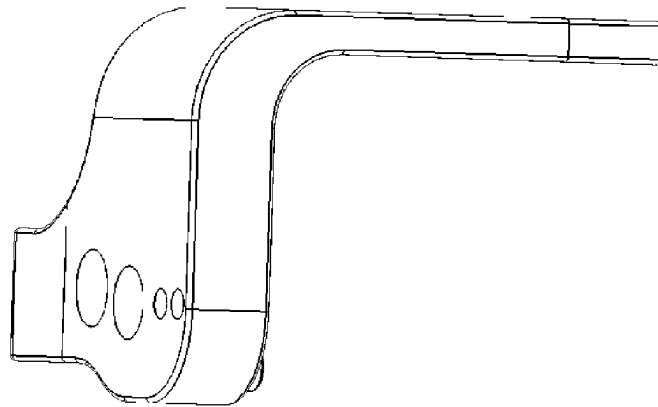


Fig. 17C

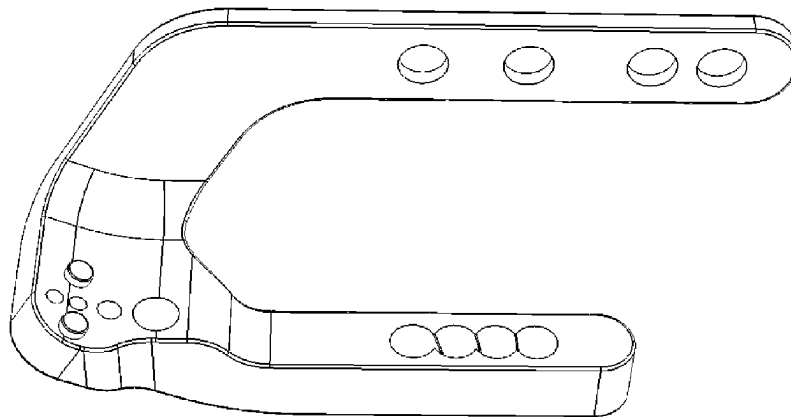


Fig. 17D

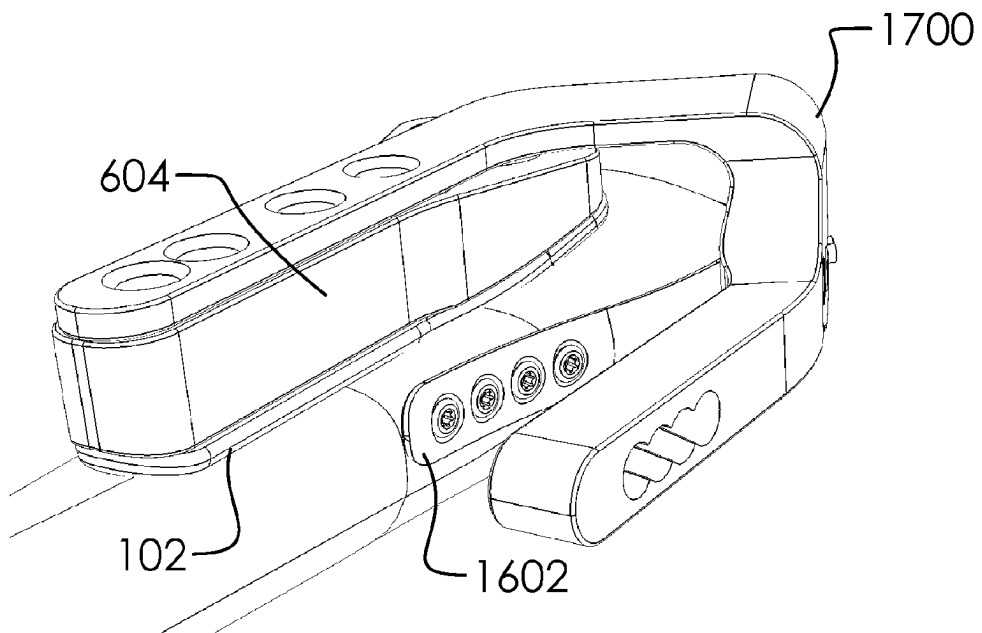


Fig. 18A

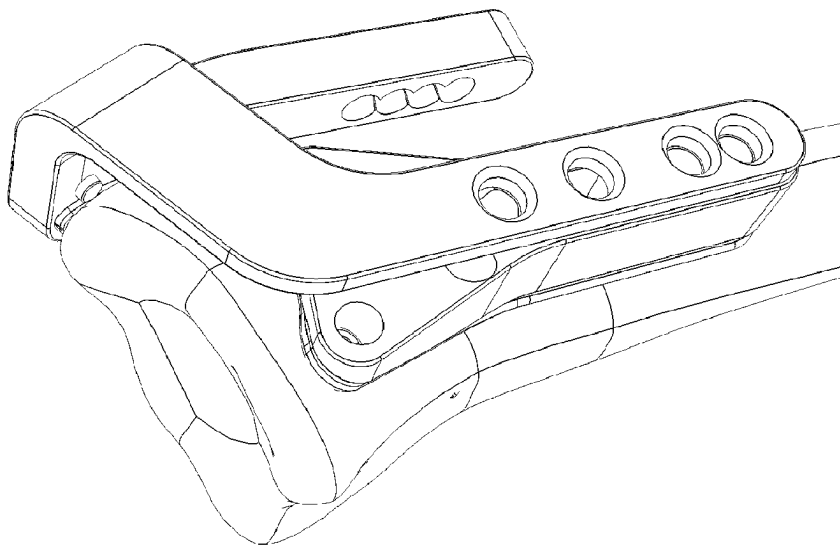


Fig. 18B

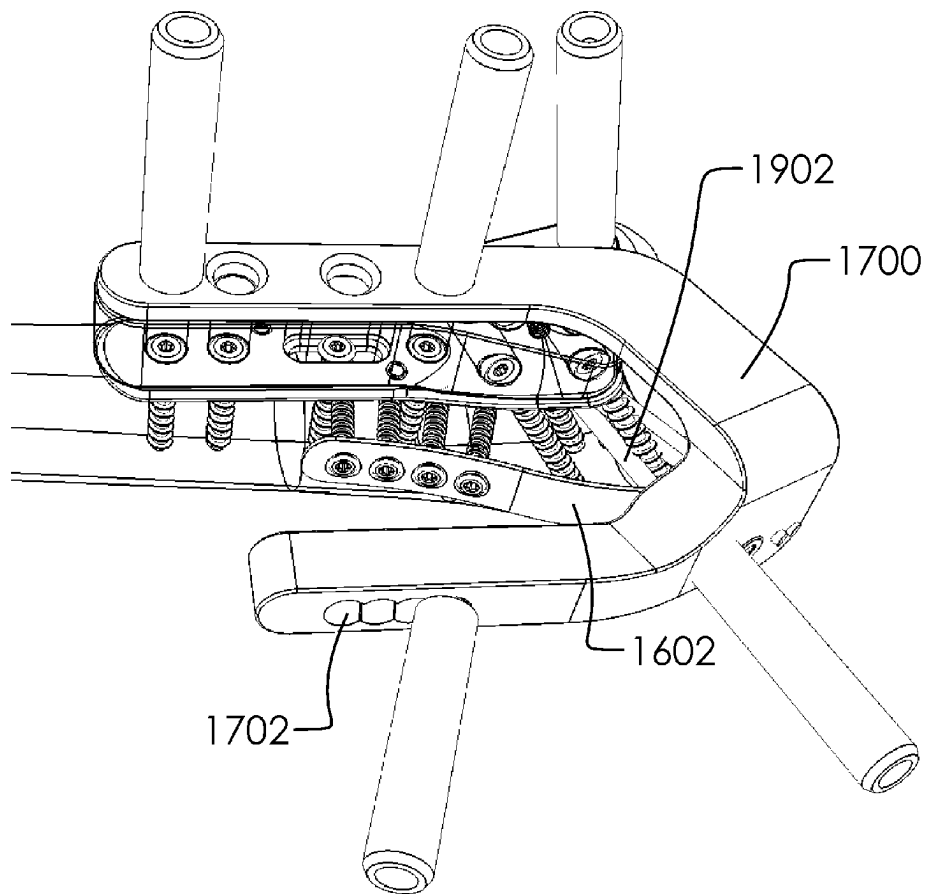


Fig. 19A

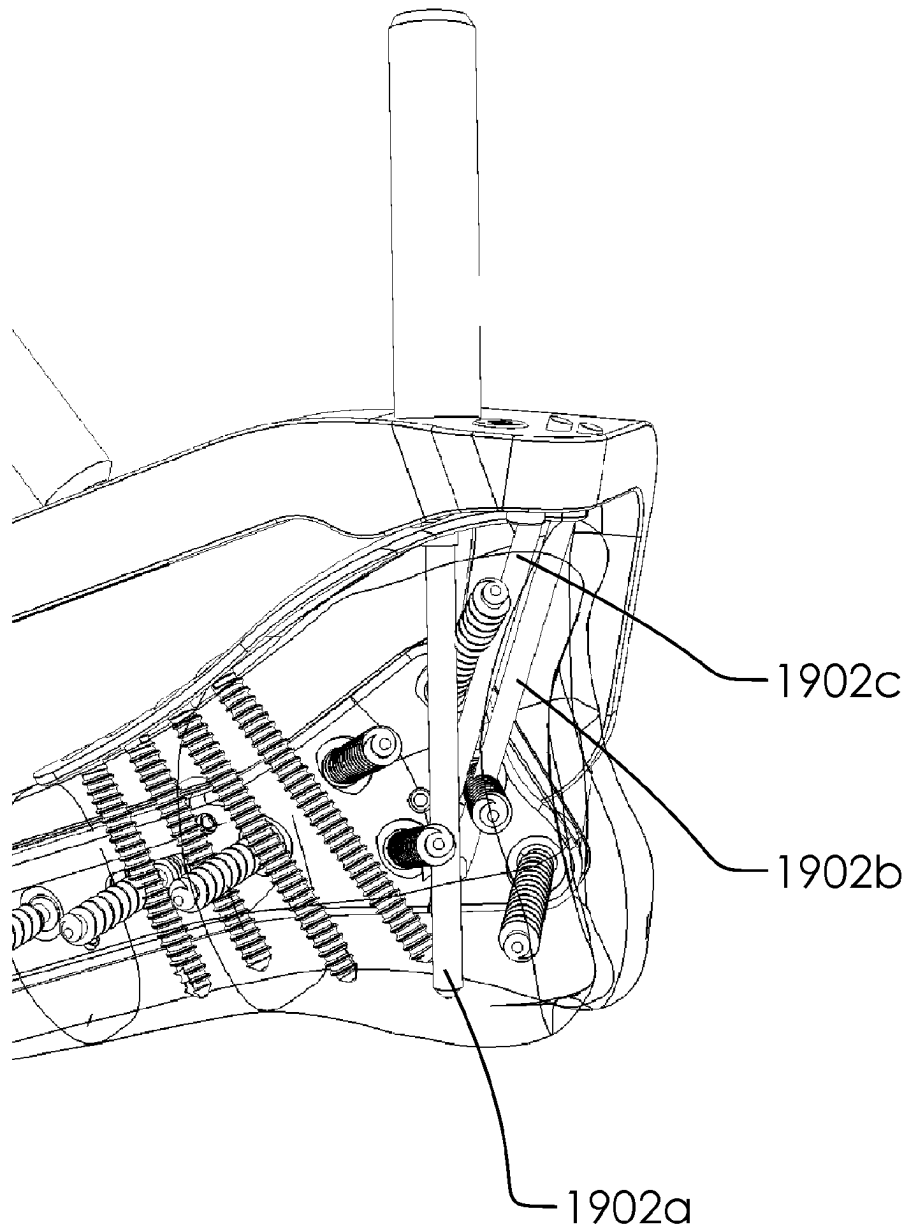


Fig. 19B

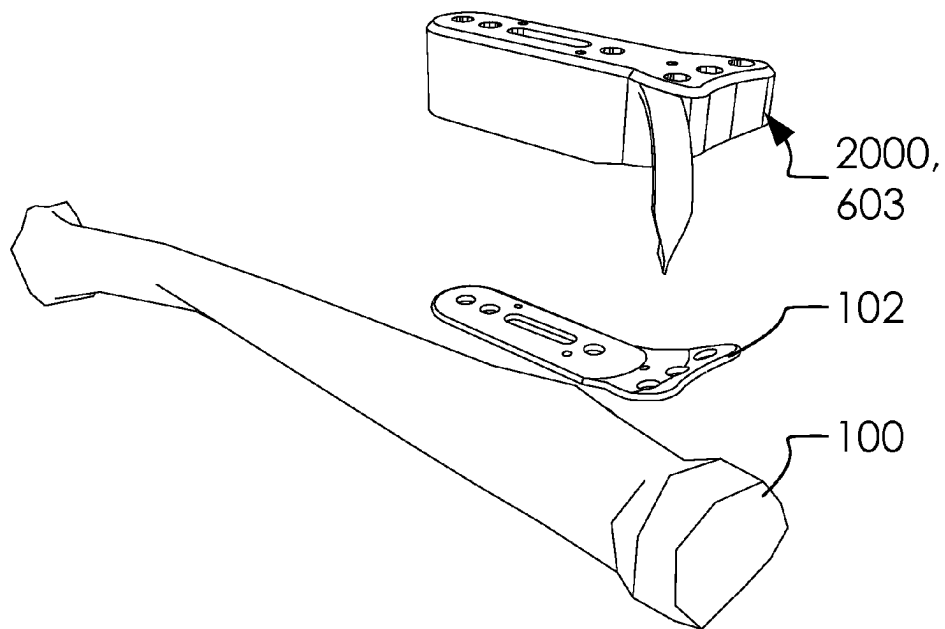


Fig. 20A

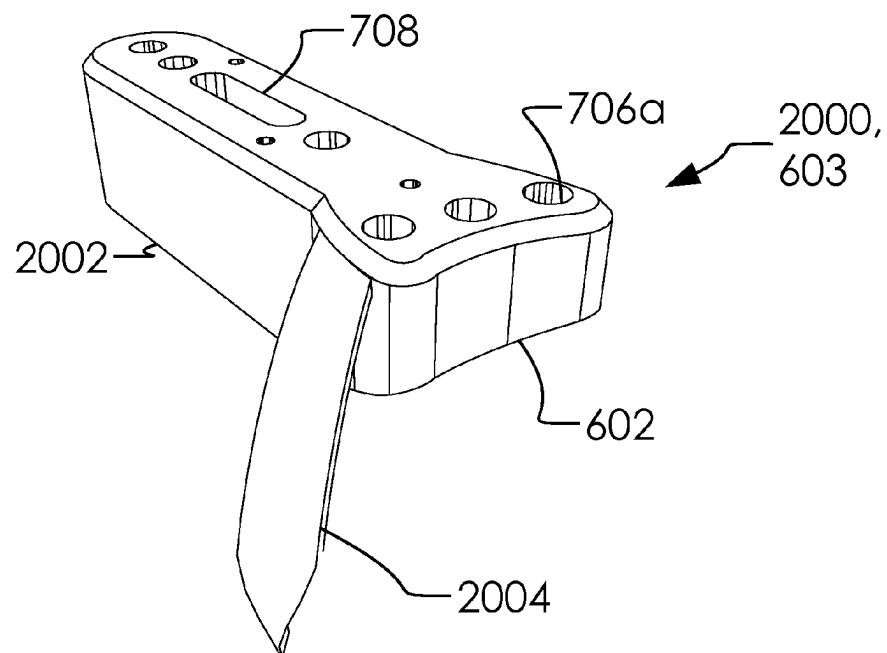


Fig. 20B

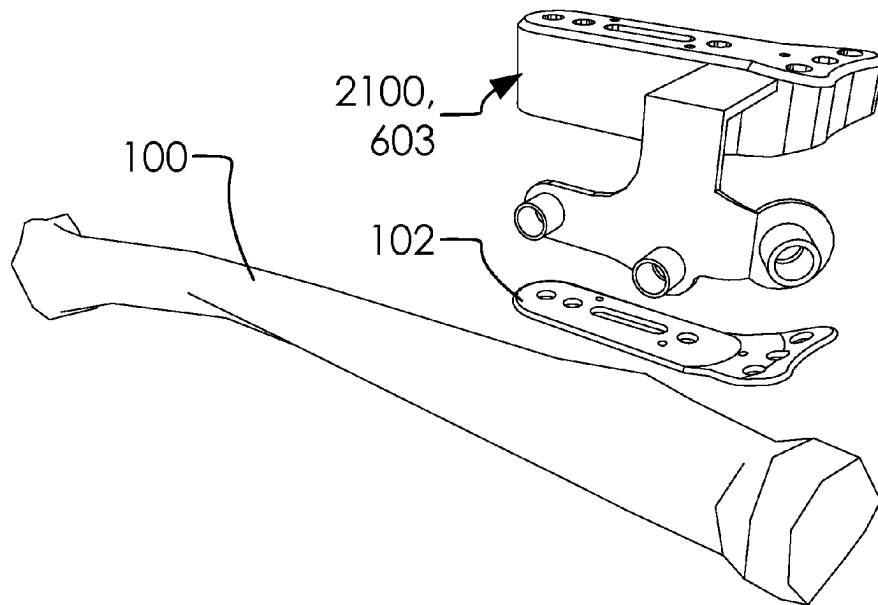


Fig. 21A

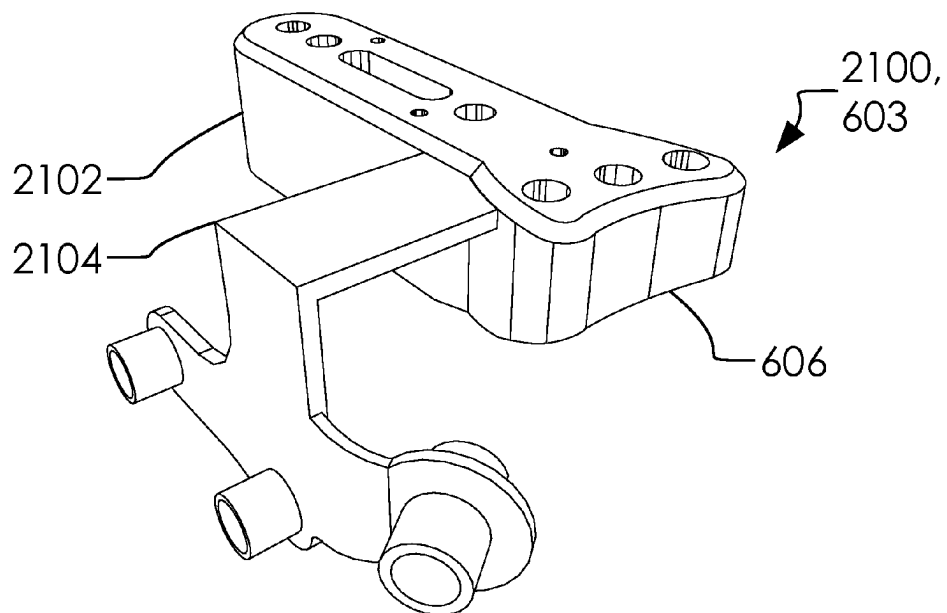


Fig. 21B

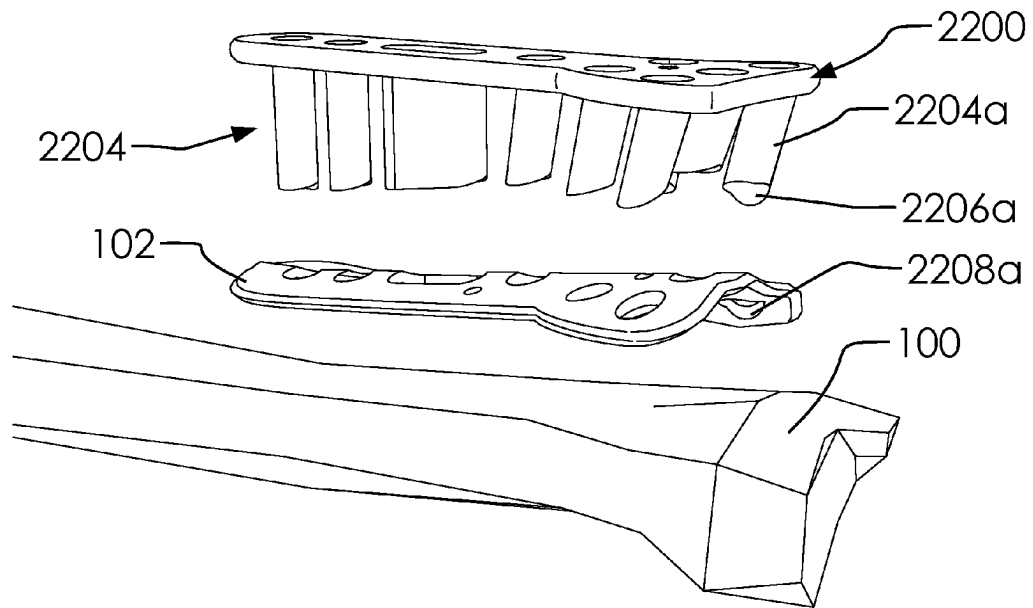


Fig. 22A

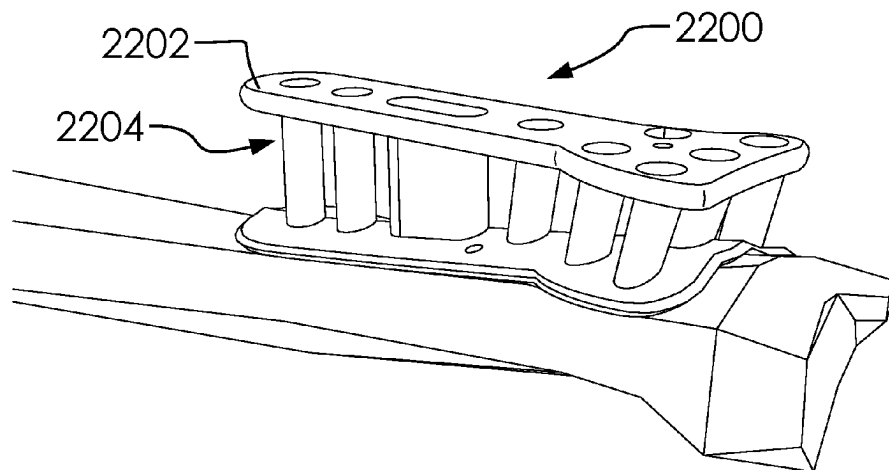


Fig. 22B

1

COMBINED INTRAMEDULLARY AND EXTRAMEDULLARY SURGICAL AIMING SYSTEM AND METHOD

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is the nonprovisional filing made on the basis of U.S. Provisional Patent Application Nos. 61/890,240 (filed on Oct. 12, 2013), and 61/934,692 (filed Jan. 31, 2014).

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT (IF APPLICABLE)

Not applicable.

REFERENCE TO SEQUENCE LISTING, A TABLE, OR A COMPUTER PROGRAM LISTING COMPACT DISC APPENDIX (IF APPLICABLE)

Not applicable.

BACKGROUND OF THE INVENTION

This disclosure relates generally to a surgical aiming system and method. Surgical systems for aiming plates and screws are well-known and include products by companies such as Synthes®, Zimmer®, Stryker®, and Biomet®. A few examples of surgical systems includes: U.S. Pat. No. 4,465,065A, US20110224736A1, U.S. Pat. No. 8,523,862B2, U.S. Pat. No. 8,523,919B2, U.S. Pat. No. 6,926,720B2, US20090228047A1, U.S. Pat. No. 8,556,945B2, U.S. Pat. No. 8,545,540B2, U.S. Pat. No. 6,342,057B1, U.S. Pat. No. 4,465,065, U.S. Pat. No. 5,366,457, U.S. Pat. No. 5,458,654, U.S. Pat. No. 5,658,283, U.S. Pat. No. 5,853,415, U.S. Pat. No. 5,928,234, U.S. Pat. No. 6,514,253, U.S. Pat. No. 6,527,775, U.S. Pat. No. 6,579,293, U.S. Pat. No. 6,692,496, U.S. Pat. No. 6,706,046, U.S. Pat. No. 6,746,453, US20030055428, US20030216742, U.S. Pat. No. 7,488,323, U.S. Pat. No. 7,588,577, U.S. Pat. No. 7,621,920, U.S. Pat. No. 7,648,508, U.S. Pat. No. 7,686,808, U.S. Pat. No. 7,727,236, U.S. Pat. No. 7,771,441, U.S. Pat. No. 7,833,230, U.S. Pat. No. 7,837,689, U.S. Pat. No. 8,034,056, U.S. Pat. No. 8,114,093, U.S. Pat. No. 8,142,432, U.S. Pat. No. 8,162,950, U.S. Pat. No. 8,282,638, U.S. Pat. No. 8,439,932, US20110106086, WO2007086854A1, WO2007109437A2, WO2008098016A2, and WO2009121144A1. However, none of the prior inventions and/or patents, taken either singularly or in combination, is seen to describe the instant disclosure as claimed.

Accordingly, an improved surgical aiming system and method would be advantageous.

BRIEF SUMMARY OF THE INVENTION

A surgical aiming system is disclosed comprising a one or more fixation plates, an aiming assembly, a one or more nails and a plurality of screws. Said one or more fixation plates comprising a first fixation plate. Said aiming assembly comprising a channeling assembly and a plurality of channels. Said one or more fixation plates comprising a plurality of plate apertures capable of receiving a portion of said plurality of screws. Said plurality of channels in said aiming assembly are capable of aligning a portion of said plurality of screws with said plurality of plate apertures in said first fixation plate. Said first fixation plate having a first end, a second end, a top

2

surface, and a bottom surface. Said plurality of plate apertures comprising a first plate aperture and a second first plate aperture. Said channeling assembly having a thickness, a top surface, and a bottom surface. Said bottom surface of said first fixation plate substantially couples with a surface of a first bone of a skeletal system. Said bottom surface said aiming assembly substantially couples with said top surface of said first fixation plate. Said plurality of channels receive and align said plurality of screws as said plurality of screws are inserted through said plurality of plate apertures and secured to said first bone. Said first fixation plate being extramedullary attached to a portion of said surface of said first bone; and said plurality of channels of said aiming assembly being aligned to identify a one or more intramedullary locations including an entry point for said one or more nails, and an alignment and entry point for each among said plurality of plate apertures.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

FIGS. 1A and 1B illustrate an elevated front view of a skeletal system and a perspective anterior view of a first bone with a first fixation plate.

FIGS. 2A, 2B and 2C illustrate a perspective overview, an elevated bottom view and an elevated side view of said first fixation plate.

FIGS. 3A and 3B illustrate an elevated cross-section view of said central plate aperture and said fourth plate aperture, respectively.

FIGS. 4A, 4B and 4C illustrate a perspective overview of a drill guide with a screw, with said drill guide, and said screw inserted into a wireframe view of said first bone.

FIGS. 5A and 5B illustrate a perspective overview of said first fixation plate attached to said first bone with a plurality of screws.

FIG. 5A illustrates said first bone as a solid view and 5B illustrates said first bone in a wireframe view.

FIGS. 5C and 5D illustrate a cross-section elevated front view of said first fixation plate and said first bone.

FIGS. 6A and 6B illustrate an exploded perspective first side overview and second side overview of said surgical aiming system with said first bone.

FIGS. 7A, 7B and 7C illustrate two exploded views and an attached perspective overview of said intramedullary entry locator, said channeling assembly, said first fixation plate and said first bone.

FIGS. 8A and 8B illustrate an exploded perspective front view and overview of said triangular screw guide, said thumb screw and said first nail.

FIG. 9 illustrates a wireframe perspective overview said first nail inserted into said first bone.

FIGS. 10A and 10B illustrate a perspective lower view and overview of said triangular screw guide, said thumb screw and said first nail attached to one another with said first bone and channeling assembly in a wireframe view.

FIGS. 11A and 11B illustrate a perspective overview and a perspective lower view of said triangular screw guide.

FIGS. 12A and 12B illustrate a perspective side view and a perspective front view of said first nail attached to said triangular screw guide with three of said plurality of screws.

FIGS. 13A, 13B, 13C, 13D and 13E illustrate a series of perspective overviews of a stacked drilling system.

FIGS. 14A and 14B illustrate a wireframe view and a solid view of a perspective overview of said first bone comprising said first nail inserted and attached to said first fixation plate with said channeling assembly, said triangular screw guide, and said thumb screw.

FIG. 15 illustrates a perspective overview of said first bone 100 with said first fixation plate attached, said first nail inserted, and a portion of said plurality of screws installed.

FIGS. 16A, 16B and 16C illustrate a perspective overview of said surgical aiming system attached to said first bone with said first fixation plate and a supplementary plate.

FIGS. 17A, 17B, 17C and 17D illustrate an elevated side view, an elevated top view, an elevated front view and a perspective lower view of a triangular screw guide.

FIGS. 18A and 18B illustrate a series of perspective overviews of said triangular screw guide aligned with said first fixation plate and said supplementary plate.

FIGS. 19A and 19B illustrate a perspective wireframe overview and detailed view of said triangular screw guide, supplementary plate, a one or more nails, and said first fixation plate attached to said first bone.

FIGS. 20A and 20B illustrate a perspective overview of a first aiming assembly, said first fixation plate and said first bone.

FIGS. 21A and 21B illustrate a perspective overview of a second aiming assembly, said first bone and said first fixation plate.

FIGS. 22A and 22B illustrate a perspective overview of a first channeling assembly, said first fixation plate and said first bone.

DETAILED DESCRIPTION OF THE INVENTION

Described herein is a combined intramedullary and extramedullary surgical aiming system and method. The following description is presented to enable any person skilled in the art to make and use the invention as claimed and is provided in the context of the particular examples discussed below, variations of which will be readily apparent to those skilled in the art. In the interest of clarity, not all features of an actual implementation are described in this specification. It will be appreciated that in the development of any such actual implementation (as in any development project), design decisions must be made to achieve the designers' specific goals (e.g., compliance with system- and business-related constraints), and that these goals will vary from one implementation to another. It will also be appreciated that such development effort might be complex and time-consuming, but would nevertheless be a routine undertaking for those of ordinary skill in the field of the appropriate art having the benefit of this disclosure. Accordingly, the claims appended hereto are not intended to be limited by the disclosed embodiments, but are to be accorded their widest scope consistent with the principles and features disclosed herein.

FIGS. 1A and 1B illustrate an elevated front view of a skeletal system 101 and a perspective anterior view of a first bone 100 with a first fixation plate 102. In one embodiment, said first fixation plate 102 can comprise a portion of a surgical aiming system 111 as illustrated more fully below. In one embodiment, said surgical aiming system 111 can comprise one or more components and methods of using said one or more components. In one embodiment, said surgical aiming system 111 can be used to treat fractures of long bones (such as first bone 100) of said skeletal system 101. In one embodiment, said first bone 100 can comprise a radius bone of said skeletal system 101. Although said skeletal system 101 comprises a human skeletal system, said surgical aiming system 111 can be used on other skeletal systems, such as non-human mammals. For illustrative purposes, said first bone 100 is used in this disclosure, but this use should not be construed as limiting to one among many bones within said skeletal system 101 which may be benefited by the current

disclosure. For example, said surgical aiming system 111 can be used on a distal radius 100a, a proximal ulna 100b, a proximal humerus 100c, a distal humerus 100d, a proximal femur 100e, a distal femur 100f, a proximal tibia 100g, or similar as is known in the art.

First bone 100 can comprise a first end 104 (or the proximal radius), a second end 106 (or the distal radius) and a surface 108. First end 104 can comprise a portion of first bone 100 comprising a radial head 112 and a neck 114. Second end 106 can comprise a portion of first bone 100 comprising a styloid process, a base-carpal articular surface and an ulnar notch, as is known in the art. In one embodiment, said first fixation plate 102 can attach to said surface 108 of said second end 106 of said first bone 100, or in this case the distal radius.

FIGS. 2A, 2B and 2C illustrate a perspective overview, an elevated bottom view and an elevated side view of said first fixation plate 102. In one embodiment, said surgical aiming system 111 can comprise a one or more fixation plates (comprising said first fixation plate 102). Said first fixation plate 102 can comprise a first end 202 and a second end 204. In one embodiment, said first fixation plate 102 can comprise an elongated planar object comprising a substantially smooth surface and rounded edges, adapted to couple with said surface 108 of said first bone 100. In one embodiment, said first end 202 can be broader than said second end 204.

In one embodiment, said first fixation plate 102 can comprise a plurality of plate apertures. In one embodiment, said plurality of plate apertures can each receive a portion of a surgical screw or other binding tool (as discussed infra). In one embodiment, said plurality of plate apertures can comprise a first plate aperture 206a, a second plate aperture 206b, a third plate aperture 206c, a fourth plate aperture 206d, a fifth plate aperture 206e, a sixth plate aperture 206f, a seventh plate aperture 206g, an eighth plate aperture 206h, a central plate aperture 208, a first wire aperture 210a, a second wire 210b, and a third wire aperture 210c.

First fixation plate 102 can comprise a top surface 212, a bottom surface 214, a first side 216 and a second side 218. In one embodiment, said first end 202 can comprise a width 219a and said second end 204 can comprise a width 219b. In one embodiment, said width 219a can be wider than said width 219b. In one embodiment, said first fixation plate 102 can comprise a substantially planar shape with portions of said bottom surface 214 shaped to couple (or mate) with said surface 108 of said first bone 100. Thus, in one embodiment said first fixation plate 102 can comprise a bend 220 between said first end 202 and said second end 204. In one embodiment, as seen from an elevated view of said second side 218, said second end 204 can comprise a substantially straight portion of said first fixation plate 102, followed by said bend 220, and said second side 218 at said first end 202 can be bent up by a bend angle 222, as illustrated.

In one embodiment, some of said plurality of plate apertures (such as first plate aperture 206a, second plate aperture 206b, third plate aperture 206c and fourth plate aperture 206d) can comprise a substantially circular shape. In one embodiment, however, central plate aperture 208 can comprise a substantially elliptical shape comprising a length 224 being longer than a width 226.

Cross-section cut lines are illustrated in FIG. 2C for FIGS. 3A and 3B, as discussed below.

FIGS. 3A and 3B illustrate an elevated cross-section view of said central plate aperture 208 and said fourth plate aperture 206d, respectively. In one embodiment, said top surface 212 can be substantially convex. In one embodiment, said bottom surface 214 can be substantially concave. In one embodiment, bottom surface 214, being substantially con-

cave, can press against and couple with said surface **108** of said second end **106** of said first bone **100** (being substantially convex). Thus, in one embodiment said first fixation plate **102** can couple with said surface **108** of said first bone **100**.

In one embodiment, each among said plurality of plate apertures can comprise an inner lip; e.g., said central plate aperture **208** can comprise a first inner lip **301a** and said fourth plate aperture **206d** can comprise a second inner lip **301b**. In one embodiment, said fourth plate aperture **206d** and said central plate aperture **208** can each comprise a first diameter **302**. In one embodiment, said first inner lip **301a**—being substantially elliptical—can comprise a second diameter **304**. However, said central plate aperture **208** and said fourth plate aperture **206d** may have different diameters in another embodiment. In one embodiment, said second diameter **304** is wide enough to accommodate a shaft and threading of a screw but narrow enough to catch a head of said screw, as discussed infra, and as is known in the art.

FIGS. 4A, 4B and 4C illustrate a perspective overview of a drill guide **402** with a screw **404**, with said drill guide **402**, and said screw **404** inserted into a wireframe view of said first bone **100**. Said screw **404** can comprise one of a range of well-known surgical screws, pegs, and/or locking or nonlocking implements; wherein, said screw **404** is capable of penetrating and holding a bone (such as first bone **100**). In one embodiment, said screw **404** can comprise a head **406** and a threaded portion **408**, as is known in the art. In one embodiment, said head **406** can comprise a fitting portion **410**. In one embodiment, a portion of said drill guide **402** can attach to said fitting portion **410** and drive said screw **404** in a rotary and linear direction, as is well-known in the art. In one embodiment, said drill guide **402** can be used to guide a drill bit in establishing a pathway prior to affixing a one or more screws. In one embodiment, said screw **404** can comprise a tip **412**. In one embodiment, said tip **412** can be sharpened and capable of penetrating first bone **100**. In one embodiment, as is known in the art, screwing said screw **404** into said first bone **100** can comprise: aligning said tip **412** on said first bone **100**, rotating said screw **404**, and pressing said screw **404** into said first bone **100** to a desired depth.

Head **406** can comprise an external diameter **414**. Threaded portion **408** can comprise an external diameter **416**. In one embodiment, said external diameter **414** is greater than second diameter **304** of said plurality of plate apertures. In one embodiment, said external diameter **416** is smaller than said second diameter **304** of said plurality of plate apertures. Thus, said plurality of plate apertures are capable of allowing a portion of said screw **404** to penetrate said first fixation plate **102** while holding a portion of said first fixation plate **102** against said surface **108** with said head **406** of said screw **404**.

FIGS. 5A and 5B illustrate a perspective overview of said first fixation plate **102** attached to said first bone **100** with a plurality of screws. FIG. 5A illustrates said first bone **100** as a solid view and 5B illustrates said first bone **100** in a wireframe view. In one embodiment, said plurality of screws can comprise a plurality of said screw **404**. In one embodiment, attaching said first fixation plate **102** to said first bone **100** can comprise: aligning said first fixation plate **102** with said second end **106** of said first bone **100**, and screwing said plurality of screws into said plurality of plate apertures of said first fixation plate **102**. In one embodiment, said bottom surface **214** of said first fixation plate **102** can be substantially flat against said surface **108** of said first bone **100** prior to attaching said first fixation plate **102** to said first bone **100**.

Note here that said plurality of screws are inserted into said first bone **100** at a, seemingly, random set of angles relative to one another. However, the positioning, angles and depth of

said plurality of screws are the result of careful thought and preparation by surgeons. Consequently, as follows, said surgical aiming system **111** can be used to insert said plurality of screws at predetermined locations and angles relative to other components of said surgical aiming system **111**.

In one embodiment, said plurality of screws can comprise a first screw **404a**, a second screw **404b**, a third screw **404c**, a fourth screw **404d**, a fifth screw **404e**, a sixth screw **404f**, a seventh screw **404g**, an eighth screw **404h**, and said ninth screw **404k**.

FIGS. 5C and 5D illustrate a cross-section elevated front view of said first fixation plate **102** and said first bone **100**. In one embodiment, screwing said plurality of screws into said plurality of plate apertures can comprise: screwing said ninth screw **404k** through said central plate aperture **208** (see FIG. 5C); sliding said first fixation plate **102** toward said second end **106** along said length **224** of said central plate aperture **208** to a final position; tightening said ninth screw **404k**; holding said first fixation plate **102** against said first bone **100** with said ninth screw **404k**; and screwing a one or more of said plurality of screws into said plurality of plate apertures (such as said eighth screw **404h** through said eighth plate aperture **206h**, as illustrated in FIG. 5D). Note that said plurality of screws are illustrated in FIGS. 5C and 5D without threading, but this is done for clarity of positioning and should not be construed of a selection of a preferred implement for attaching and holding said first fixation plate **102** to said first bone **100**. In a preferred embodiment said plurality of plate apertures have threading, as is known in the art.

FIGS. 6A and 6B illustrate an exploded perspective first side overview and second side overview of said surgical aiming system **111** with said first bone **100**. In one embodiment, said surgical aiming system **111** can comprise of an aiming assembly **603** (comprising of an intramedullary entry locator **602**, a channeling assembly **604**, a triangular screw guide **606**, and a thumb screw **608**), said first fixation plate **102**, and a first nail **610**. In one embodiment, said aiming assembly **603** can comprise of four independent parts or fewer parts, as will be discussed infra).

In one embodiment, said first nail **610** can comprise an intramedullary rod (“IM rod”), an intramedullary nail (“IM nail”), an inter-locking nail, or a Küntscher nail. In one embodiment, said first nail **610** can comprise a metal rod forced into the medullary cavity of a bone (such as first bone **100**). Intramedullary nails, like said first nail **610**, have long been used to treat fractures of long bones of the body, as is well-known in the art.

In one embodiment, each among a one or more components of said surgical aiming system **111** can comprise a plurality of channels which, when held in alignment, are capable of precisely positioning said plurality of screws and said first nail **610** when inserted into said first bone **100**. Thus, in one embodiment, said one or more components of said surgical aiming system **111** can be used to align and hold said first nail **610**, as is discussed and illustrated infra.

In one embodiment, said aiming assembly **603** can comprise parts which break apart and are useful for different purposes while a surgeon is attaching said surgical aiming system **111** to said first bone **100**. For example, said intramedullary entry locator **602** and said triangular screw guide **606** may not be used simultaneously, but in sequence, as discussed infra.

Focusing on FIG. 6B, in one embodiment, said intramedullary entry locator **602** can comprise a top surface **620** and a bottom surface **622**. Likewise, in one embodiment, said channeling assembly **604** can comprise a top surface **624** and a bottom surface **626**. In one embodiment, said bottom surface

7

622 of said intramedullary entry locator 602 mates with said top surface 624 of said channeling assembly 604; said bottom surface 626 of said channeling assembly 604 mates with said top surface 212 of said first fixation plate 102; and said bottom surface 214 of said first fixation plate 102 mates with said surface 108 of said first bone 100. In one embodiment, the term “mates” means that two components substantially abut one another having a geometry formed to securely stack against one another.

FIGS. 7A, 7B and 7C illustrate two exploded views and an attached perspective overview of said intramedullary entry locator 602, said channeling assembly 604, said first fixation plate 102 and said first bone 100.

In one embodiment, said aiming assembly 603 (here, said channeling assembly 604) can comprise a first channel 706a, a second channel 706b, a third channel 706c, a fourth channel 706d, a fifth channel 706e, a sixth channel 706f, a seventh channel 706g, an eighth channel 706h, a central channel 708, an first wire aperture 710a. Likewise, in one embodiment, said intramedullary entry locator 602 can comprise a first channel 702 and a second channel 704. In one embodiment, channeling assembly 604 can comprise a thickness 711.

In one embodiment, a method of using said surgical aiming system 111 can comprise: placing said first fixation plate 102 on a portion of said first bone 100; stacking said channeling assembly 604 on said first fixation plate 102, and said intramedullary entry locator 602 on top of said channeling assembly 604; aligning a portion of said plurality of channels in said intramedullary entry locator 602 with said channeling assembly 604 and said first fixation plate 102; guiding said plurality of screws through said plurality of channels; and attaching said plurality of screws to said first bone 100 at predetermined positions and angles. In one embodiment, said method of using said surgical aiming system 111 can further comprise: attaching said triangular screw guide 606 to said channeling assembly 604; inserting said first nail 610 into said first bone 100; and attaching said first nail 610 on a portion of said triangular screw guide 606.

In one embodiment, as illustrated in FIG. 7B, aligning and securing said intramedullary entry locator 602, said channeling assembly 604 and said first fixation plate 102 can comprise: aligning said first aperture 702 with said fourth channel 706d and said fourth plate aperture 206d; aligning said second aperture 704 with said fifth channel 706e and said fifth plate aperture 206e; inserting said fourth screw 404d through said first channel 702, said fourth channel 706d and said fourth plate aperture 206d; inserting said fifth screw 404e through said second channel 704, said fifth channel 706e and said fifth plate aperture 206e; and securing said fourth screw 404d and said fifth screw 404e to said first bone 100.

Prior to attaching said intramedullary entry locator 602 and said channeling assembly 604 to said first fixation plate 102, a portion of said first fixation plate 102 can be attached to said first bone 100.

In one embodiment, aligning said surgical aiming system 111 can further comprise: attaching said intramedullary entry locator 602 to said channeling assembly 604; and marking an entry point 718 with a pointing device 716 of said intramedullary entry locator 602; wherein, said entry point 718 can comprise an aligned location for inserting said first nail 610. In one embodiment, as illustrated in FIG. 7C, said intramedullary entry locator 602 can be held in alignment with said channeling assembly 604 by inserting one or more of said drill guide 402 through threaded portions of said first aperture 702 and/or said second aperture 704.

Said intramedullary entry locator 602 can comprise an upper portion 712 and a lower portion 714. In one embodi-

8

ment, said upper portion 712 can comprise a substantially planar and horizontal member and said lower portion 714 can comprise a substantially vertical member of said intramedullary entry locator 602. In one embodiment, viewing said intramedullary entry locator 602 from an elevated side view, said upper portion 712 can be substantially horizontal, then gradually bend downward until lower portion 714 is substantially vertical. In one embodiment, lower portion 714 can comprise said pointing device 716. In one embodiment, said pointing device 716 can comprise marker for said entry point 718 for said first nail 610, as discussed infra.

In one embodiment, said one or more plates can hold a portion of said first bone from a plurality of surface locations around one or more nails within said first bone.

FIGS. 8A and 8B illustrate an exploded perspective front view and overview of said triangular screw guide 606, said thumb screw 608 and said first nail 610. In one embodiment, said thumb screw 608 can comprise a threaded portion 802 and a gripping portion 804. In one embodiment, said triangular screw guide 606 can comprise a thumb screw socket 806. In one embodiment, said first nail 610 can comprise a first end 808 and a second end 810. In one embodiment, said first end 808 can comprise a first coupler 812 and said thumb screw socket 806 can comprise a second coupler 814.

In one embodiment, attaching said first nail 610 to said triangular screw guide 606 can comprise: aligning said threaded portion 802 with said thumb screw socket 806, attaching said first coupler 812 to said second coupler 814, inserting said threaded portion 802 through said thumb screw socket 806 and into said first coupler 812, screwing said threaded portion 802 into said first coupler 812, and tightening said threaded portion 802 of said thumb screw 608 until said triangular screw guide 606 is firmly held between said thumb screw 608 and said first nail 610.

In one embodiment, said triangular screw guide 606 can comprise a top portion 816 and a side portion 818. In one embodiment, said side portion 818 can comprise a plurality of top apertures. In one embodiment, said plurality of top apertures can comprise a first aperture 820, a second aperture 822 and a third aperture 824.

In one embodiment, said first nail 610 can comprise a plurality of threaded female apertures each capable of receiving a portion of said threaded portions of said one of said plurality of screws. In one embodiment, said plurality of threaded female apertures can comprise a first female aperture 826a, a second female aperture 826b and a third female aperture 826c.

FIG. 9 illustrates a wireframe perspective overview said first nail 610 inserted into said first bone 100. In one embodiment, inserting said first nail 610 into said first bone 100 can comprise: drilling a portal at said entry point 718, inserting a portion of said first nail 610 into a medullary cavity of said first bone 100.

In one embodiment, said plurality of channels of said aiming assembly 603 (here, said channeling assembly 604) are capable of directing said plurality of screws through said first fixation plate 102 and into said first bone 100 at a set of predetermined entry angles. For example, in one embodiment, said second channel 706b can direct said second screw 404b into said first bone 100 at a second entry angle 902b.

FIGS. 10A and 10B illustrate a perspective lower view and overview of said triangular screw guide 606, said thumb screw 608 and said first nail 610 attached to one another with said first bone 100 and channeling assembly 604 in a wireframe view. In one embodiment, said plurality of said drill guide 402 can comprise a first drill guide 1002 and a second drill guide 1004. In one embodiment, aligning said triangular

screw guide **606** with said channeling assembly **604** can comprise: aligning said first aperture **820** of said triangular screw guide **606** with said fourth channel **706d**, aligning said second aperture **822** with said fifth channel **706e**, inserting and attaching said first drill guide **1002** through said first aperture **820** and into fourth channel **706d**, and said second drill guide **1004** through said second aperture **822** and into said fifth channel **706e**.

In one embodiment, attaching said triangular screw guide **606** to said channeling assembly **604** and said first nail **610** can comprise: aligning said triangular screw guide **606** with said channeling assembly **604**, attaching said triangular screw guide **606** to said channeling assembly **604** with said first drill guide **1002** and said second drill guide **1004**, insert said thumb screw **608** through said thumb screw socket **806**, attaching said thumb screw **608** to said first nail **610**, and holding said triangular screw guide **606** between said thumb screw **608** and said first nail **610**.

FIGS. **11A** and **11B** illustrate a perspective overview and a perspective lower view of said triangular screw guide **606**. In one embodiment, said triangular screw guide **606** can comprise a plurality of channels capable of aligning a portion of said plurality of screws and/or drilling tools with said plurality of threaded female apertures of said first nail **610**.

In one embodiment, said plurality of channels of said triangular screw guide **606** can comprise a first channel **1102a** (having a first axis **1104a**), a second channel **1102b** (having a second axis **1104b**) and said third aperture **824** (having a third axis **1104c**).

Said side portion **818** of said triangular screw guide **606** can comprise one or more side apertures. In one embodiment, said one or more side apertures can comprise a first aperture **1108a** (comprising said first channel **1102a**) and a second aperture **1108b** (comprising said second channel **1102b**).

FIGS. **12A** and **12B** illustrate a perspective side view and a perspective front view of said first nail **610** attached to said triangular screw guide **606** with three of said plurality of screws. In one embodiment, said plurality of screws can comprise an eleventh screw **1202**, a twelfth screw **1204** and a thirteenth screw **1206**. In one embodiment, said first axis **1104a** aligns with said first female aperture **826a**, said second axis **1104b** aligns with said second female aperture **826b**, and said third central axis **1104c** aligns with said third female aperture **826c**. In one embodiment, attaching said thirteenth screw **1206** can comprise the same screw as said ninth screw **404k**.

In one embodiment, a method of using said surgical aiming system **111** can comprise: inserting said first nail **610** into said first bone **100**; attaching said triangular screw guide **606** to said first nail **610**; aligning and inserting a portion of said plurality of screws with/through said plurality of channels of said triangular screw guide **606**; locating said plurality of threaded female apertures with said portion of said plurality of screws, and securing said first fixation plate **102** and said first nail **610** to one another in a relatively fixed position. The benefit of this feature is substantial, as said first nail **610** is inside of said first bone **100**, and said first bone **100** is within an arm of a patient; thus, using said plurality of channels to find said plurality of threaded female apertures on said first nail **610** can comprise a useful tool to surgeons.

FIGS. **13A**, **13B**, **13C**, **13D** and **13E** illustrate a series of perspective overviews of a stacked drilling system **1300**. In one embodiment, said stacked drilling system **1300** can comprise a tissue sleeve **1302**, a drill sleeve **1304**, and a trocar **1306**. In one embodiment, said surgical aiming system **111** can comprise a one or more of said stacked drilling system **1300**. In one embodiment, each of said stacked drilling sys-

tem **1300** can slide through said first aperture **1108a** and said second aperture **1108b**. In one embodiment, attaching plurality of screws through said first aperture **1108a** and/or said second aperture **1108b** can comprise preparing a plurality of apertures in said first bone **100** for said plurality of screws. In one embodiment, preparing a plurality of apertures in said first bone **100** for said plurality of screws can comprise: inserting said tissue sleeve **1302** into said first aperture **1108a** or said second aperture **1108b**; pressing and/or drilling said tissue sleeve **1302** through a tissue of said patient's arm; inserting a portion of said drill sleeve **1304** through said tissue sleeve **1302**; pressing and/or drilling said drill sleeve **1304** into said arm; inserting a portion of said trocar **1306** through said drill sleeve **1304**; pressing and/or drilling said trocar **1306** down to said first bone **100**; removing said trocar **1306**; drilling through said drill sleeve **1304**; removing said drill sleeve **1304** from said tissue sleeve **1302**; and screwing said eleventh screw **1202** and/or thirteenth screw **1206** through said tissue sleeve **1302** and into said plurality of threaded female apertures of said first nail **610**.

FIGS. **14A** and **14B** illustrate a wireframe view and a solid view of a perspective overview of said first bone **100** comprising said first nail **610** inserted and attached to said first fixation plate **102** with said channeling assembly **604**, said triangular screw guide **606**, and said thumb screw **608**.

FIG. **15** illustrates a perspective overview of said first bone **100** with said first fixation plate **102** attached, said first nail **610** inserted, and a portion of said plurality of screws installed. In one embodiment, said surgical aiming system **111** can comprise: installing said first fixation plate **102**, said first nail **610** and said plurality of screws to holding said surgical aiming system **111** to said first bone **100**.

FIGS. **16A**, **16B** and **16C** illustrate a perspective overview said surgical aiming system **111** attached to said first bone **100** with said first fixation plate **102** and a supplementary plate **1602**. In one embodiment, said surgical aiming system **111** can comprise a one or more plates attached to said first bone **100**. In one embodiment, said one or more plates attached to said first bone **100** can comprise said first fixation plate **102** and a supplementary plate **1602**. In one embodiment, said supplementary plate **1602** can support a styloid portion of said first bone **100** while said first fixation plate **102** can support a top portion of said first bone **100**. In one embodiment, said supplementary plate **1602** and said first fixation plate **102** can attach around said first bone **100** as illustrated (substantially at a perpendicular angle relative to said first nail **610**) or at differing angles relative to said first nail **610**. In one embodiment, said supplementary plate **1602** can be useful for reconstructing said first bone **100**, where additional support is required in an operation. In one embodiment, said supplementary plate **1602** can comprise one or more apertures capable of receiving one or more of said plurality of screws, as illustrated.

FIGS. **17A**, **17B**, **17C** and **17D** illustrate an elevated side view, an elevated top view, an elevated front view and a perspective lower view of a triangular screw guide **1700**. In one embodiment, said triangular screw guide **1700** can be substantially identical to said triangular screw guide **606**, but-for a rearrangement of said channels, as illustrated. In one embodiment, a multi-channel aperture **1702** can provide for the direction of a one or more screws into said supplementary plate **1602**, as illustrated infra.

FIGS. **18A** and **18B** illustrate a series of perspective overviews of said triangular screw guide **1700** aligned with said first fixation plate **102** and said supplementary plate **1602**. In one embodiment, said second embodiment of said surgical aiming system **111** can comprise said first fixation plate **102**,

11

said supplementary plate **1602**, said channeling assembly **604**, said triangular screw guide **1700**, and said plurality of screws. In one embodiment, attaching said second embodiment of said surgical aiming system **111** can comprise: attaching said first fixation plate **102** to said first bone **100**; aligning said supplementary plate **1602** with said styloid portion of said first bone **100**; aligning said channeling assembly **604** and said triangular screw guide **1700** with said first fixation plate **102**; attaching said supplementary plate **1602** to said first fixation plate **102**.

FIGS. **19A** and **19B** illustrate a perspective wireframe overview and detailed view of said triangular screw guide **1700**, supplementary plate **1602**, a one or more nails, and said first fixation plate **102** attached to said first bone **100**. In one embodiment, said triangular screw guide **1700** can be used to insert said one or more nails (comprising a first nail **1902a**, a second nail **1902b** and a third nail **1902c**) into said first bone **100**.

FIGS. **20A** and **20B** illustrate a perspective overview of a first aiming assembly **2000**, said first fixation plate **102** and a first bone **100**. In one embodiment, said first aiming assembly **2000** can comprise an integrated component comprising parts previously introduced as said channeling assembly **604** and said intramedullary entry locator **602**. In one embodiment, said first aiming assembly **2000** can comprise said aiming assembly **603** in one fully integrated part.

Accordingly, said surgical aiming system **111** can comprise: a one or more fixation plates (such as said first fixation plate **102**) capable of attaching extramedullary to said first bone **100**, said aiming assembly **603** (such as said first aiming assembly **2000**) capable of attaching intramedullary to said first bone **100**, and a plurality of screws to attach them to one another; wherein, said surgical aiming system **111** is capable of holding said extramedullary and intramedullary components in a relatively fixed position to one another during assembly of said surgical aiming system **111**.

In one embodiment, said surgical aiming system (such as said first aiming assembly **2000**) can comprise a one-piece component.

In one embodiment, said first aiming assembly **2000** can comprise a spacing portion **2002**, a pointing device **2004**, and a plurality of channels (such as said first channel **706a** and said central channel **708**). In one embodiment, said first aiming assembly **2000** can be used in conjunction with a one or more fixation plates (such as said first fixation plate **102**).

FIGS. **21A** and **21B** illustrate a perspective overview of a second aiming assembly **2100**, said first bone **100** and said first fixation plate **102**. In one embodiment, said second aiming assembly **2100** can be similar to said first aiming assembly **2000**, in that it is an integral component used in lieu of a plurality of components as illustrated with said channeling assembly **604** and said triangular screw guide **606**. In one embodiment, said second aiming assembly **2100** can comprise one of said aiming assembly **603**, as discussed for said first aiming assembly **2000**, supra. In one embodiment, said second aiming assembly **2100** can comprise a spacing portion **2102** and a triangular screw guide portion **2104**.

In one embodiment, holding said extramedullary and intramedullary components said surgical aiming system **111** in a relatively fixed position to one another can comprise: attaching said one or more fixation plates (such as said first fixation plate **102**) extramedullary to said first bone **100**; attaching said aiming assembly **603** (such as said second aiming assembly **2100**) intramedullary to said first bone **100** via a plurality of screws.

FIGS. **22A** and **22B** illustrate a perspective overview of a channeling assembly **2200**, said first bone **100** and said first

12

fixation plate **102**. In one embodiment, said channeling assembly **2200** can be similar to said channeling assembly **604** in that excess material between a one or more channels is absent. In one embodiment, said channeling assembly **2200** can be used in lieu of said channeling assembly **604** while saving on materials cost and weight.

In one embodiment, said channeling assembly **2200** can comprise a frame **2202** and a plurality of channels **2204** (such as a first channel **2204a**). In one embodiment, said plurality of channels are capable of mating with said first fixation plate **102**. For example, in one embodiment, said first channel **2204a** (having a lower portion **2206a**) can align with a first aperture **2208a** in said first fixation plate **102**. In one embodiment, said channeling assembly **2200** can be used with a one or more fixation plates or a one or more aiming assemblies.

Likewise, in one embodiment, said pointing device **2004** and/or said triangular screw guide portion **2104** can be attached to said channeling assembly **2200**. Thus, said channeling assembly **2200** is included as an exemplary embodiment for said channeling assembly **604** and illustrates that a solid block need not be employed to provide the benefits of said channeling assembly **604** and the overall benefits of said surgical aiming system **111**.

Various changes in the details of the illustrated operational methods are possible without departing from the scope of the following claims. Some embodiments may combine the activities described herein as being separate steps. Similarly, one or more of the described steps may be omitted, depending upon the specific operational environment the method is being implemented in. It is to be understood that the above description is intended to be illustrative, and not restrictive. For example, the above-described embodiments may be used in combination with each other or in another anatomic location with appropriately configured hardware and guides. Many other embodiments will be apparent to those of skill in the art upon reviewing the above description. The scope of the invention should, therefore, be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled. In the appended claims, the terms “including” and “in which” are used as the plain-English equivalents of the respective terms “comprising” and “wherein.”

The invention claimed is:

1. A surgical aiming system comprising:

a one or more fixation plates, an aiming assembly, a one or more nails and a plurality of screws;

said one or more fixation plates comprising a first fixation plate;

said aiming assembly comprising a channeling assembly and a plurality of channels;

said one or more fixation plates comprising a plurality of plate apertures capable of receiving a portion of said plurality of screws;

said plurality of channels in said aiming assembly are capable of aligning a portion of said plurality of screws with said plurality of plate apertures in said first fixation plate;

said first fixation plate having

a first end,
a second end,
a top surface, and
a bottom surface;

said plurality of plate apertures comprising a first plate aperture and a second first plate aperture;

said channeling assembly having
a thickness,
a top surface, and

13

a bottom surface;
 said bottom surface of said first fixation plate substantially configured to couple with a surface of a first bone of a skeletal system;
 said bottom surface of said aiming assembly substantially couples with said top surface of said first fixation plate; said plurality of channels receive and align said plurality of screws as said plurality of screws are inserted through said plurality of plate apertures and configured to be secured to said first bone;
 said first fixation plate being extramedullary attached to a portion of said surface of said first bone;
 said plurality of channels of said aiming assembly being aligned to identify a one or more intramedullary locations including
 an entry point for said one or more nails, and
 an alignment and entry point for each among said plurality of plate apertures;
 said aiming assembly comprising an assembly of a plurality of components;
 said aiming assembly comprising a channeling assembly and an intramedullary entry locator having a pointing device;
 said one or more nails comprising a first nail;
 said intramedullary entry locator having an upper portion and a lower portion;
 said upper portion comprising a first channel and a second channel of said intramedullary entry locator;
 said lower portion comprising said pointing device;
 said upper portion being capable of releasably attaching to said channeling assembly of said aiming assembly;
 said upper portion being substantially parallel with said channeling assembly of said aiming assembly when attached thereto; and
 said lower portion bending down and away from said upper portion until said pointing device is substantially perpendicular to said upper portion.

2. A surgical aiming system comprising: a one or more fixation plates, an aiming assembly, a one or more nails and a plurality of screws; said one or more fixation plates comprising a first fixation plate; said aiming assembly comprising a channeling assembly and a plurality of channels; said one or more fixation plates comprising a plurality of plate apertures capable of receiving a portion of said plurality of screws; said plurality of channels in said aiming assembly are capable of aligning a portion of said plurality of screws with said plurality of plate apertures in said first fixation plate; said first fixation plate having a first end, a second end, a top surface, and a bottom surface; said plurality of plate apertures comprising a first plate aperture and a second first plate aperture; said channeling assembly having a thickness, a top surface, and a bottom surface; said bottom surface of said first fixation plate substantially configured to couple with a surface of a first bone of a skeletal system; said bottom surface said aiming assembly substantially couples with said top surface of said first fixation plate; said plurality of channels receive and align said plurality of screws as said plurality of screws are inserted through said plurality of plate apertures and configured to be secured to said first bone; said first fixation plate being extramedullary attached to a portion of said surface of said first bone; and said plurality of channels of said aiming assembly being aligned to identify a one or more intramedullary locations including an entry point for said one or more nails, and an alignment and entry point for each among said plurality of plate apertures, wherein said aiming assembly comprising an assembly of a plurality of components; and

14

said aiming assembly comprising a channeling assembly and an intramedullary entry locator having a pointing device, wherein said one or more nails comprising a first nail; said intramedullary entry locator having an upper portion and a lower portion; said upper portion comprising a first channel and a second channel of said intramedullary entry locator; said lower portion comprising said pointing device; and said upper portion being capable of releasably attaching to said channeling assembly of said aiming assembly, wherein said first nail comprising a plurality of threaded female apertures; said aiming assembly comprising a triangular screw guide;
 said triangular screw guide comprising a plurality of channels; said triangular screw guide is capable of releasably attaching to said first nail; with said triangular screw guide attached to said first nail, said plurality of channels in said triangular screw guide are aligned with said plurality of threaded female apertures of said first nail; and aligning a portion of said plurality of screws with said plurality of threaded female apertures comprises attaching said portion of said plurality of screws into said first bone through said plurality of channels of said triangular screw guide.

3. The surgical aiming system of claim 2 wherein:
 said aiming assembly comprising a one-piece component.

4. The surgical aiming system of claim 2 wherein:
 said upper portion being substantially parallel with said channeling assembly of said aiming assembly when attached thereto; and
 said lower portion bending down and away from said upper portion until said pointing device is substantially perpendicular to said upper portion.

5. The surgical aiming system of claim 2 wherein:
 said pointing device identifying said entry point for said first nail or drill when said upper portion is attached to said channeling assembly; and
 said entry point aligned so that said first nail can enter said first bone without hitting said plurality of screws within said first bone.

6. The surgical aiming system of claim 2 wherein:
 said first bone of said skeletal system belongs to a mammal.

7. The surgical aiming system of claim 2 wherein:
 said first bone of said skeletal system belongs to a human.

8. The surgical aiming system of claim 2 further comprising:
 said one or more plates comprising of said first fixation plate a supplementary plate;
 said one or more plates attach around a portion of said first bone;
 said one or more plates each comprise a portion of said plurality of plate apertures;
 said aiming assembly releasably attaches to said one or more plates;
 said plurality of channels in said aiming assembly align and direct said plurality of screws into and through said plurality of plate apertures in said one or more plates; and
 said one or more plates hold a portion of said first bone from a plurality of surface locations around said one or more nails within said first bone.

9. The surgical aiming system of claim 2 wherein:
 said alignment and entry points of said plurality of screws through said plurality of channels of said aiming assembly are predetermined to
 avoid intersecting with said one or more nails or
 to attach to a portion of said one or more nails.

* * * * *