



US008534933B2

(12) **United States Patent**
Sherwood

(10) **Patent No.:** **US 8,534,933 B2**
(45) **Date of Patent:** **Sep. 17, 2013**

(54) **SYSTEM FOR STORING AND RELEASING A CAMERA FOR QUICK USE**

(76) Inventor: **Brent Wayne Sherwood**, Amarillo, TX (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **13/026,264**

(22) Filed: **Feb. 13, 2011**

(65) **Prior Publication Data**

US 2012/0207464 A1 Aug. 16, 2012

(51) **Int. Cl.**
G03B 17/56 (2006.01)

(52) **U.S. Cl.**
USPC **396/428**; 396/348

(58) **Field of Classification Search**
CPC G03B 17/56
USPC 348/231.7, 281, 302, 375; 248/187.1;
341/347; 361/679.58, 728; 396/348, 486-488,
396/519, 528, 419-428

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,279,443	A *	4/1942	Chanosky	396/329
2,483,711	A	10/1946	Roos	
2,413,272	A *	12/1946	Wheelwright	396/428
3,291,179	A *	12/1966	Lang	206/316.2
3,966,101	A *	6/1976	Taylor, III	224/219
4,341,452	A *	7/1982	Korling	396/428
4,733,259	A *	3/1988	Ng	396/419
5,081,478	A *	1/1992	Hayashida et al.	396/425
5,612,515	A *	3/1997	Eisen	177/126
5,828,917	A *	10/1998	Stephenson	396/424
6,184,804	B1 *	2/2001	Harrison	341/22
6,330,961	B1 *	12/2001	Borja	224/222

6,899,255	B2 *	5/2005	Pringle	224/221
6,955,484	B2 *	10/2005	Woodman	396/423
7,272,423	B2 *	9/2007	Satoh et al.	455/575.3
7,273,321	B2 *	9/2007	Woodman	396/420
7,422,379	B2 *	9/2008	Agevik et al.	396/424
7,458,736	B2 *	12/2008	Woodman	396/420
7,549,807	B2 *	6/2009	Nazarian	396/420
7,726,887	B2 *	6/2010	Su et al.	396/423
7,780,126	B2 *	8/2010	Law et al.	248/168
7,853,299	B2 *	12/2010	Kang et al.	455/575.3
7,958,602	B2 *	6/2011	Nishizawa et al.	16/367
8,002,480	B2 *	8/2011	Polster	396/425
8,016,492	B2 *	9/2011	Pyle	396/423
2003/0044180	A1 *	3/2003	Lindberg	396/420
2003/0094385	A1 *	5/2003	Moldovan	206/38
2004/0200868	A1 *	10/2004	Woodman	224/221

(Continued)

Primary Examiner — Clayton E Laballe


Assistant Examiner — Kevin Butler

(74) *Attorney, Agent, or Firm* — Shannon L. Warren

(57) **ABSTRACT**

A first system for mounting a camera to an arm is disclosed. Specifically, the first system comprises a bracket system, an arm mount, and a hinge system. Said bracket system is capable of supporting a camera. Said hinge system comprises a clasp device having a first portion and a second portion. Said hinge system connects said bracket system and said arm mount, and said first portion and said second portion of said clasp device are capable of selectively releasing and reattaching to one another and thereby release and reattach said bracket system and said arm mount. Further, a second system for mounting a camera to an arm is disclosed. Specifically, the second system comprises a bracket system, an arm mount, and a hinge system having a bending point. Said bracket system is capable of supporting a camera. Said hinge system connects said bracket system and said arm mount. Said hinge system comprises a flexible portion comprising a flexible material. Said bending point is in said flexible portion. And, finally, said bending point serves as a pivot point for said hinge system.

20 Claims, 8 Drawing Sheets

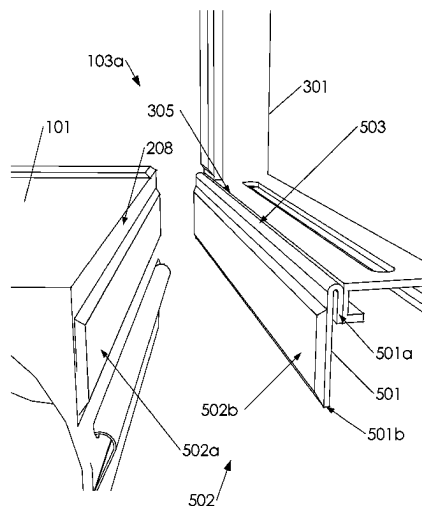

(56)

References Cited

U.S. PATENT DOCUMENTS

2005/0270732	A1 *	12/2005	Titzler et al.	361/681	2008/0240705	A1 *	10/2008	Nazarian	396/420
2006/0008269	A1 *	1/2006	Woodman	396/423	2009/0057356	A1 *	3/2009	Woodman	224/219
2006/0055607	A1 *	3/2006	Satoh et al.	343/702	2009/0103261	A1 *	4/2009	Shih	361/679.58
2006/0097927	A1 *	5/2006	Satoh et al.	343/702	2009/0280861	A1 *	11/2009	Khan	455/556.1
2006/0162122	A1 *	7/2006	Satoh et al.	16/221	2010/0006518	A1 *	1/2010	Brobst	211/26
2006/0264792	A1 *	11/2006	Bonn	602/21	2010/0316369	A1 *	12/2010	Pyle	396/423
2007/0122141	A1 *	5/2007	Agevik et al.	396/419	2011/0069947	A1 *	3/2011	Orf	396/419
2007/0149260	A1 *	6/2007	Satoh et al.	455/575.1	2011/0077061	A1 *	3/2011	Danze et al.	455/575.1
2008/0146295	A1 *	6/2008	Jorgensen et al.	455/575.3	2011/0199728	A1 *	8/2011	Reyes	361/679.31
					2011/0301520	A1 *	12/2011	Summit et al.	602/16

* cited by examiner

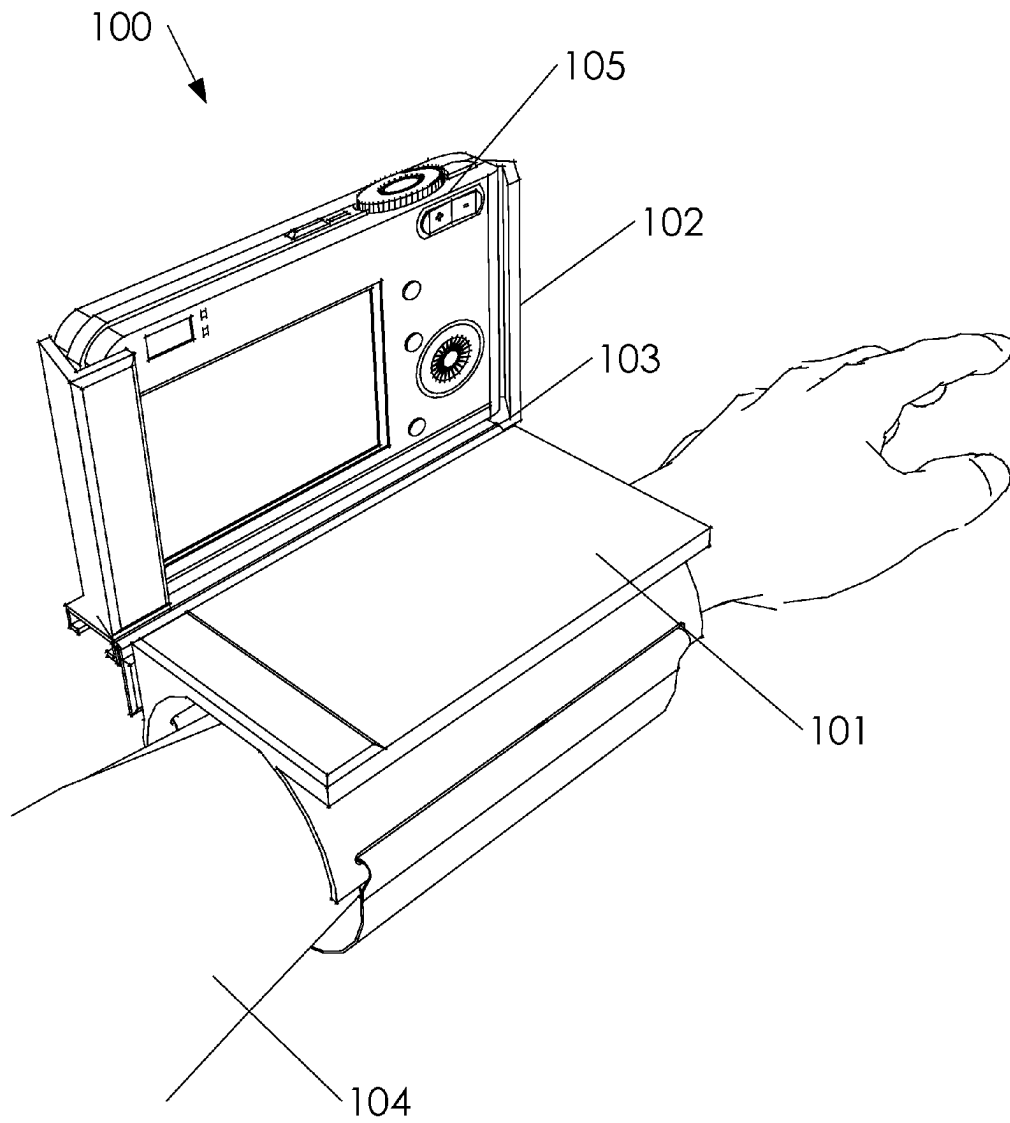


Fig. 1

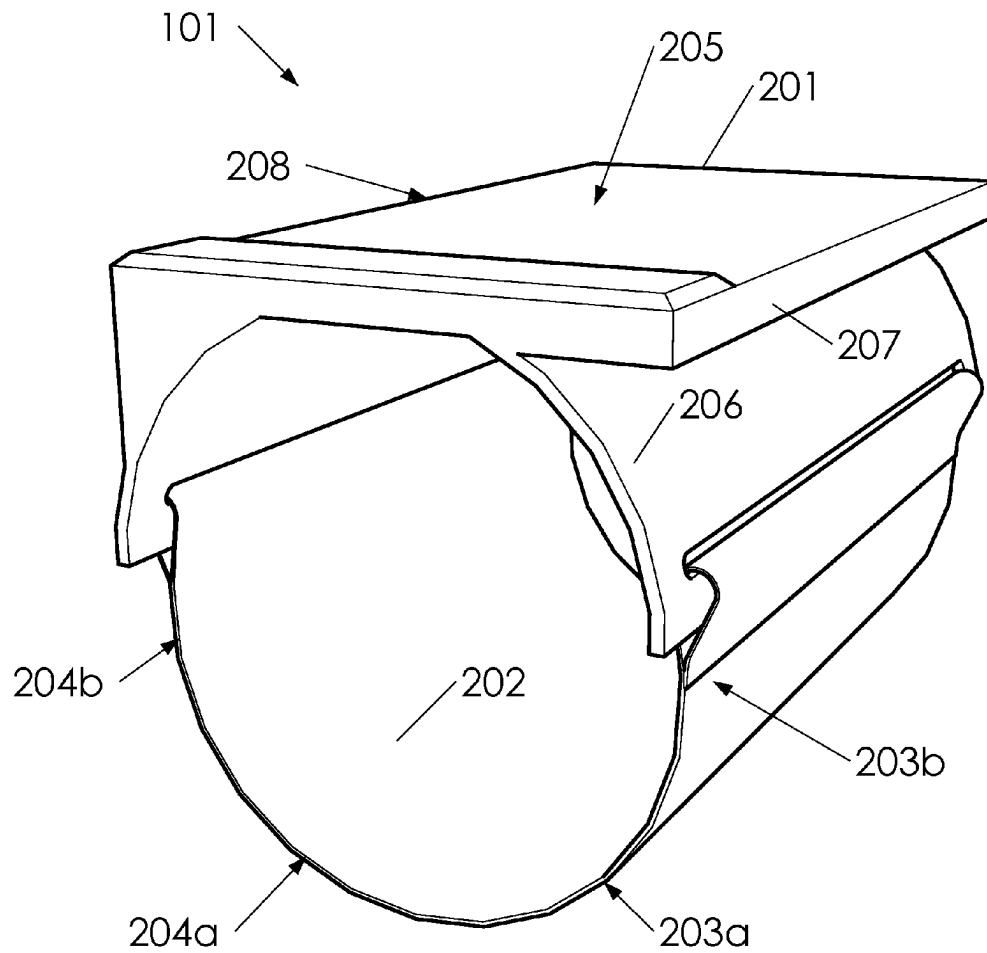


Fig. 2

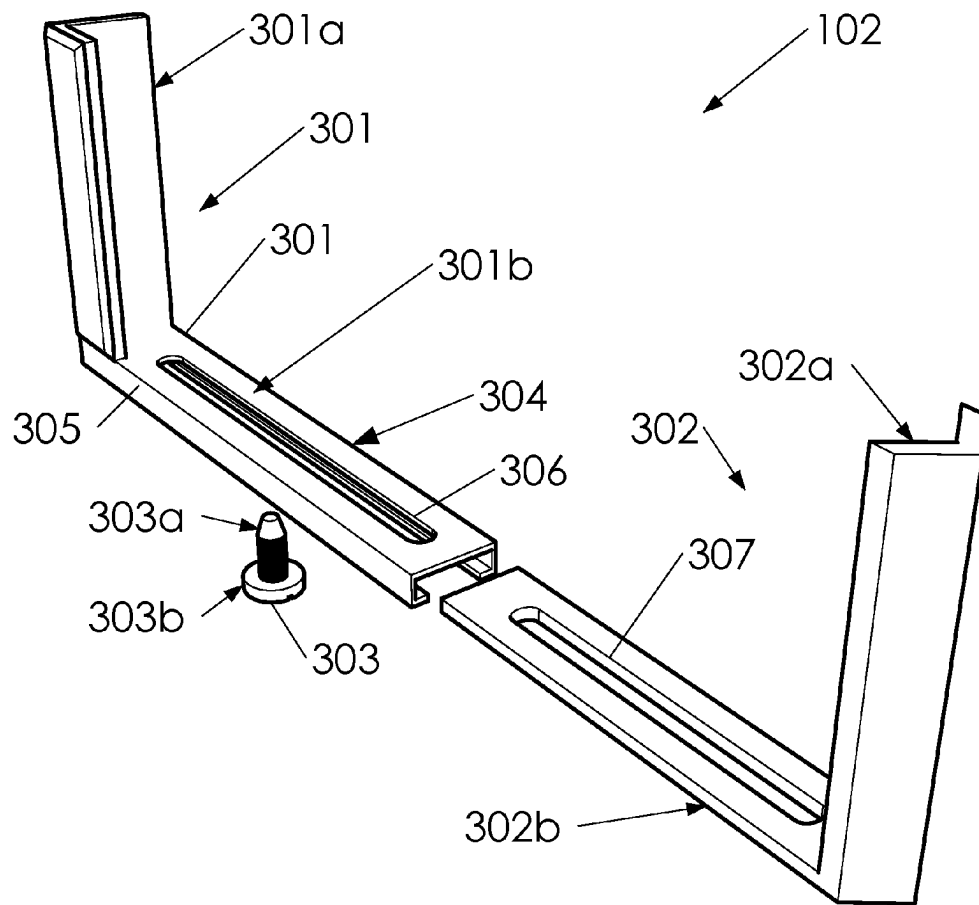


Fig. 3

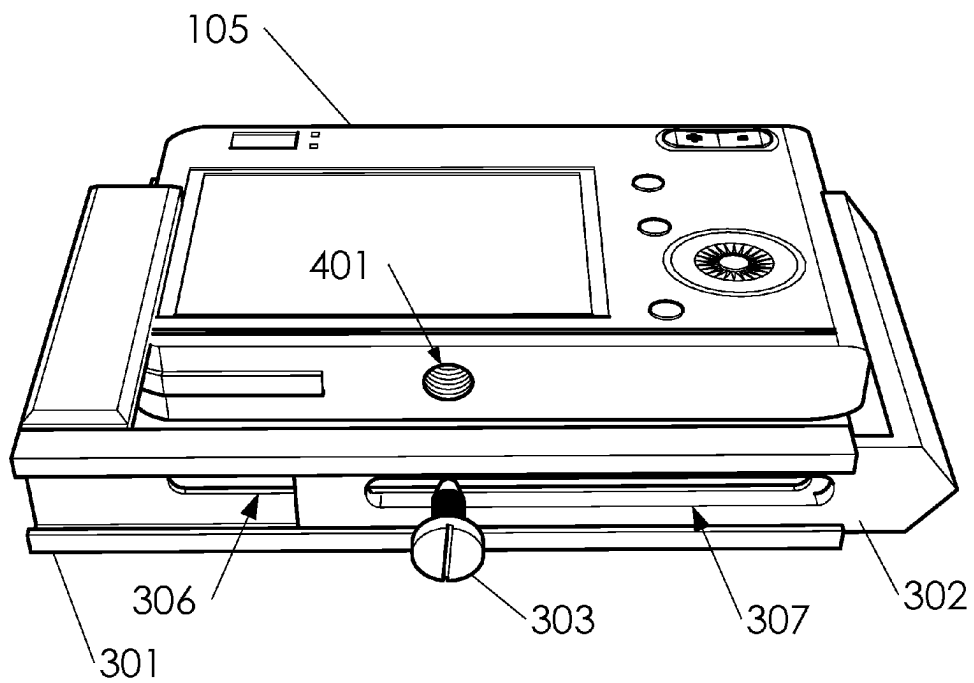


Fig. 4

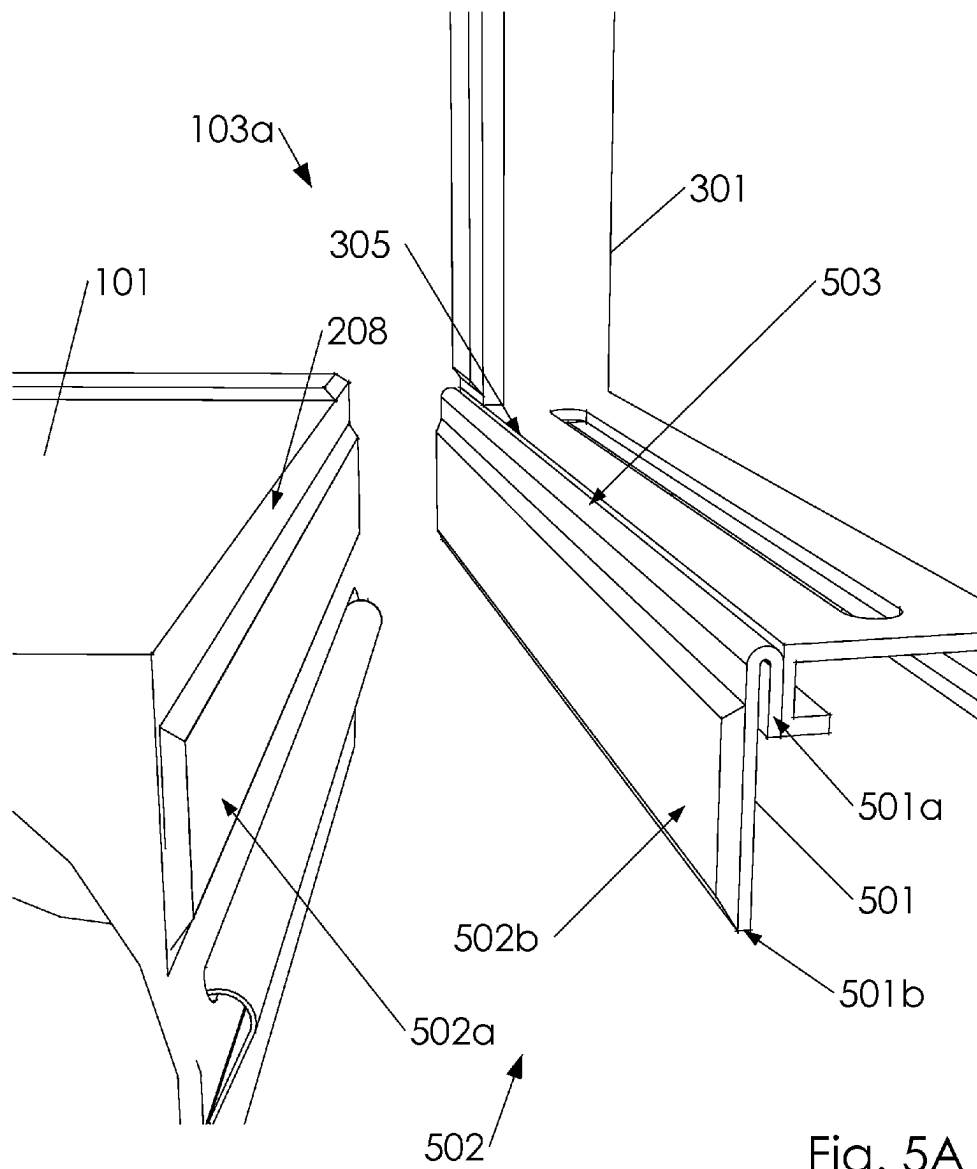


Fig. 5A

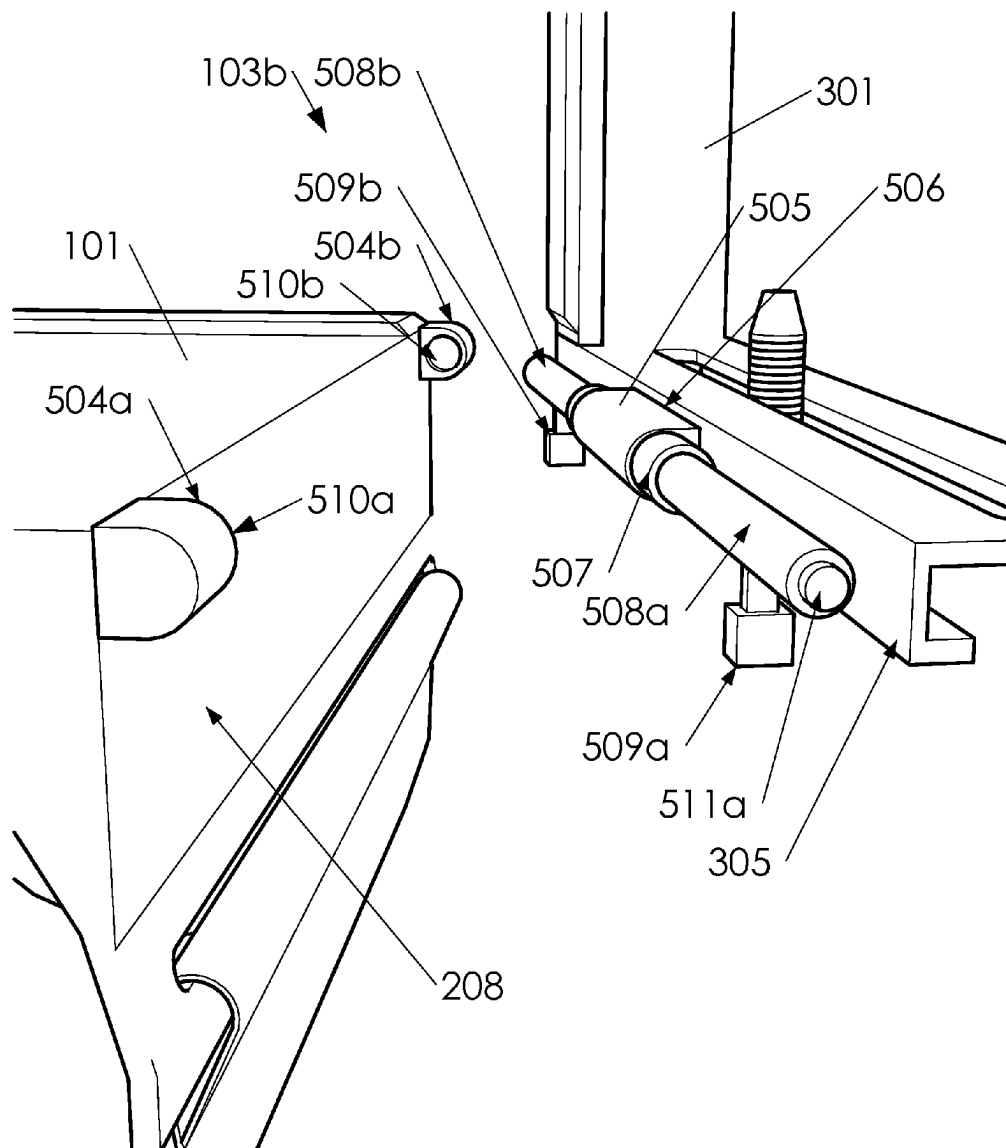


Fig. 5B

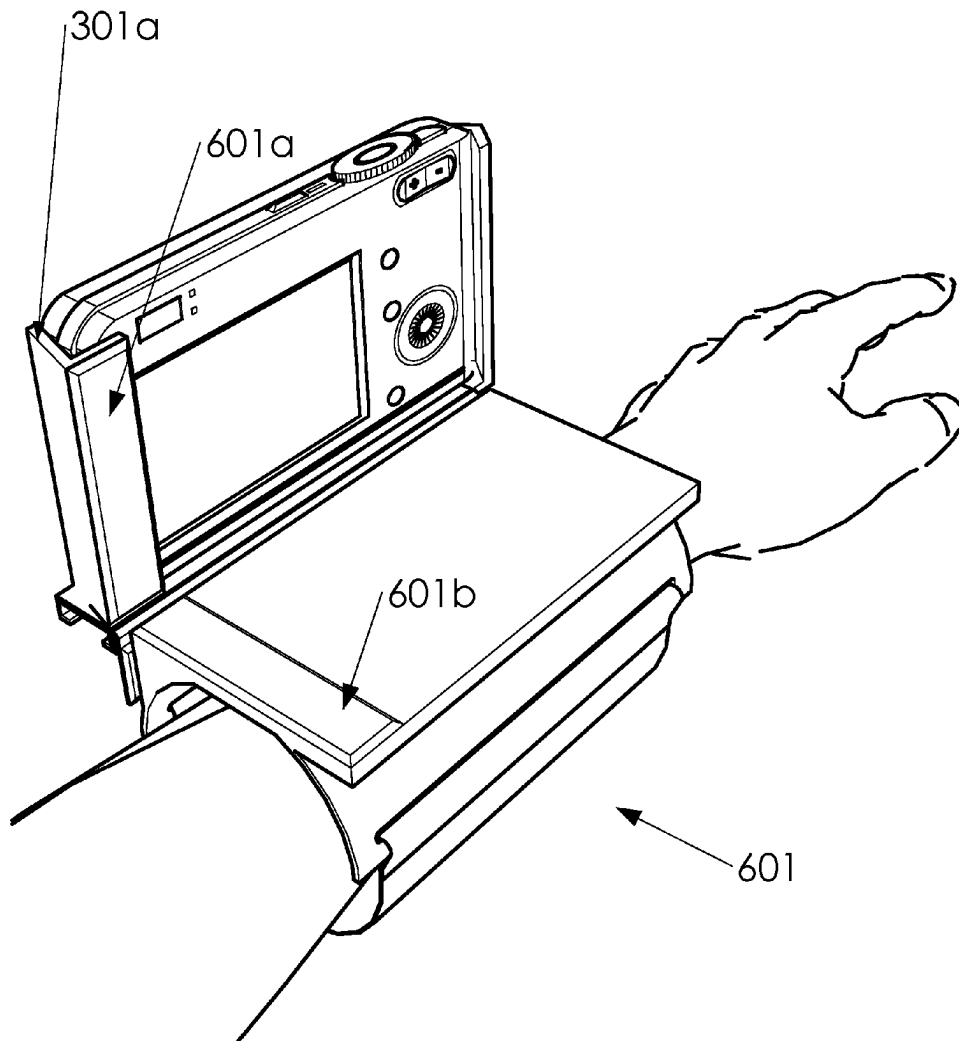


Fig. 6

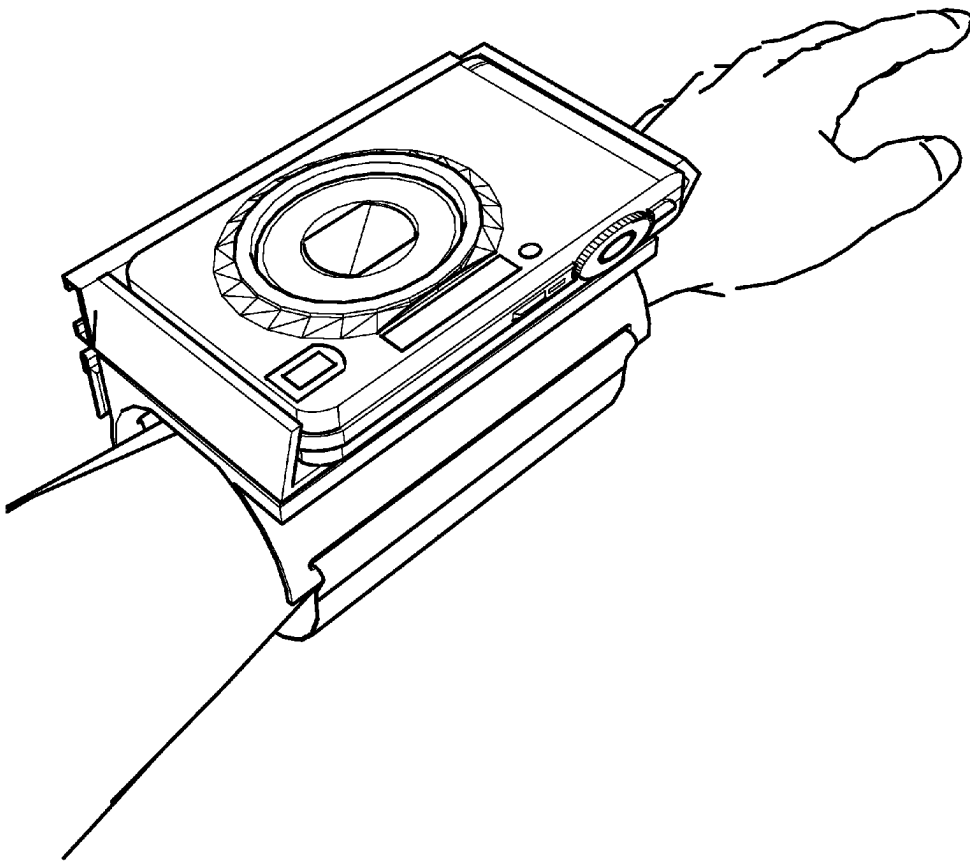


Fig. 7

1

SYSTEM FOR STORING AND RELEASING A CAMERA FOR QUICK USE

BACKGROUND

This disclosure relates to a system for a camera arm mount system.

Today, cameras are smaller, cheaper and produce better quality pictures than ever before. As a consequence more and more people carry cameras to capture moments while on vacation and in their daily lives. In some situations, such as during an important event or at a particular location, a user may wish to take many photos. However, the user may also need the use of his or her hands, forcing the user to store and remove the camera between uses. To alleviate this problem, a few solutions have been offered. One current solution includes attaching a rope loop to the camera, capable of sliding over a wrist. Another solution is to place a neckband on the camera to allow the camera to hang around the user's neck. Still another solution includes mounting a case to a belt buckle.

However, each solution mentioned above has problems associated with it. The rope loop often is too loose, and even when fitted snugly, still allows the camera to hang down, exposing it to damage, or requiring the user to hold the camera. The neckband also allows the camera to hang freely, exposing the camera to greater risk of damage, particularly if the user is in an active environment. A belt loop mounted case protects the camera, but can be bulky and requires extra time to take out the camera.

It would therefore be advantageous to implement a camera arm mount system.

SUMMARY

A system for mounting a camera to an arm is disclosed. Specifically, the first system comprises a bracket system, an arm mount, and a hinge system. Said bracket system is capable of supporting a camera. Said hinge system comprises a clasp device having a first portion and a second portion. Said hinge system connects said bracket system and said arm mount, and said first portion and said second portion of said clasp device are capable of selectively releasing and reattaching to one another and thereby release and reattach said bracket system and said arm mount.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a camera arm mount system.

FIG. 2 illustrates a first view of an arm mount.

FIG. 3 illustrates a bracket system.

FIG. 4 illustrates a camera fastener interacting with a first bracket and a second bracket.

FIG. 5A illustrates a flexible portion system and a portion of camera arm mount system in a detached position.

FIG. 5B illustrates an alternate hinge system and a portion of camera arm mount system in a detached position.

FIG. 6 illustrates camera arm mount system in an in-use position.

FIG. 7 illustrates camera arm mount system in a non-use position.

DETAILED DESCRIPTION

Described herein is a camera arm mount system. The following description is presented to enable any person skilled in the art to make and use the invention as claimed and is pro-

2

vided in the context of the particular examples discussed below, variations of which will be readily apparent to those skilled in the art. In the interest of clarity, not all features of an actual implementation are described in this specification. It will be appreciated that in the development of any such actual implementation (as in any project), numerous design decisions must be made to achieve the designer's specific goals (e.g., compliance with system- and business-related constraints), and that these goals will vary from one implementation to another. It will also be appreciated that such development effort might be complex and time-consuming, but would nevertheless be a routine undertaking for those of ordinary skill in the applicable art. Accordingly, the claims appended hereto are not intended to be limited by the disclosed embodiments, but are to be accorded their widest scope consistent with the principles and features disclosed herein.

FIG. 1 illustrates a camera arm mount system **100**. Camera arm mount system **100** can comprise an arm mount **101**, a bracket system **102**, and a hinge system **103**. Hinge system **103** can comprise several embodiments such as a hinge system **103a** (illustrated in FIG. 5A) and an alternate hinge system **103b** (illustrated in FIG. 5B). Arm mount **101** can attach to an arm **104** of a user. In one embodiment, bracket system **102** can support a camera **105**. In one embodiment, hinge system **103** can connect bracket system **102** to arm mount **101**. In one embodiment, hinge system **103** can be configured to detach and reattach bracket system **102** from arm mount **101**.

FIG. 2 illustrates a first view of arm mount **101**. FIG. 1. Arm mount **101** FIG. 1 can comprise a non-use support **201** for camera **105**, and an armband **202**. In one embodiment, non-use support **201** and armband **202** are formed from substantially the same piece of material. In another embodiment, non-use support **201** and armband **202** can be two or more different pieces of material. In such embodiment, armband **202** can affix arm mount **101** FIG. 1 to arm **104** in a number of ways. In one embodiment, armband **202** can comprise a first side **203** and a second side **204**. First side **203** can comprise a bottom portion **203a** and a top portion **203b**. Second side **204** can comprise a bottom portion **204a** and a top portion **204b**. Non-use support **201** can comprise a top surface **205**, a first side **207**, and a second side **208**. Non-use support **201** can further comprise a subsurface **206**, existing below and attached to top surface **205**.

In one embodiment, bottom portion **203a** can comprise a set of one or more fasteners capable of mating with a set of one or more fasteners on a bottom side **204a**. Examples of fasteners capable of mating include, but are not limited to, watchstraps and buckles, buttons, clasps, and corresponding hook-and-loop portions (such as Velcro®). In one embodiment, the first and second side of armband **202** can be a single article capable of stretching over and around arm **104**, as shown in FIG. 2. In one embodiment, armband **202** can comprise an elastic material. In another embodiment, top portion **203b** and top portion **204b** can connect to non-use support **201**. In such embodiment, top portion **203b** and top portion **204b** can connect to opposite sides of non-use support **201**. In another configuration, top portion **203b** and top portion **204b** can be connected to form a single top portion. In one embodiment, top portion **204b** can pass through an open portion of subsurface **206**, loop back down and attach to armband **202**. In one such embodiment, arm band **202** can be adjustably tightened to arm **104** depending on the position top portion **204b** is attached to armband **202**.

In one embodiment, top surface **205** can be a curved surface, in the general shape of the curvature of arm **104**. In

3

another embodiment, top surface **205** can be substantially flat. In one embodiment, top portion **203b** and top portion **204b** can connect to top surface **205**. In another embodiment, top portion **203b** and top portion **204b** can connect to sub-surface **206**, as shown in FIG. 2.

FIG. 3 illustrates bracket system **102** FIG. 1. Bracket system **102** FIG. 1 can comprise a first bracket **301**, a second bracket **302**, and/or a camera fastener **303**. In one embodiment, bracket system **102** FIG. 1 can comprise a single bracket capable of supporting a camera. In another embodiment, bracket system **102** FIG. 1 can comprise the combination of first bracket **301** and second bracket **302** capable of supporting a camera. Camera fastener **303** can comprise a camera fastener head **303a** and a camera fastener body **303b**. First bracket **301** can comprise a first side **304** and a second side **305**. In one embodiment, bracket system **102** FIG. 1 can support camera **105**. In one embodiment, bracket system **102** FIG. 1 can be configured to accommodate a variety of different cameras. In another embodiment, bracket system can be configured to accommodate a specific camera. In one embodiment, first bracket **301** can be substantially in the shape of an “L”, wherein a side portion **301a** and a bottom portion **301b** form the two portions of the “L”. In one embodiment, side portion **301a** can comprise two connected substantially planar walls, one wall substantially parallel with the back of camera **105**, and a second wall substantially parallel with a side of camera **105**. In another embodiment, side portion **301a** can be curved or substantially in the shape of a “V”. In yet another embodiment, side portion **301a** can be planar and substantially parallel with a side of camera **105**.

In one embodiment, bottom portion **301b** can be flat. In another embodiment, edges can be bent downward so as to form an upside down “U” shape. Still further, in another embodiment, bottom portion **301b** edges can each be bent downward and inward, as shown in FIG. 3, to form a track for second bracket **302**. Bottom portion **301b** can comprise an aperture **306**. In one embodiment, aperture **306** can extend along bottom portion **301b**, aperture **306** having a length much longer than its width, as shown in FIG. 3.

Second bracket **302** can also be substantially in the shape of an “L”, wherein a side portion **302a** and a bottom portion **302b** form the two portions of the “L”. In one embodiment, side portion **302a** can be planar and substantially parallel with a second side of camera **105**. In another embodiment, side portion **302a** can be curved or substantially in the shape of a “V”. Bottom portion **302b** can comprise an aperture **307**. In one embodiment, aperture **307** can extend along the bottom portion **302b**, aperture **307** having a length much longer than its width, as shown in FIG. 3. Second bracket **302** can align with first bracket such that at least a portion of aperture **306** and aperture **307** overlap. In one embodiment, aperture **306** and aperture **307** can each be a plurality of individual orifices, each large enough for only a portion of camera fastener **303** to pass through. In another embodiment, aperture **306** and aperture **307** can each vary in width intermittently to form interval positions at which only camera fastener head **303a** can pass. In one embodiment, bottom portion **302b** can slide inside a track formed by bended edges of bottom portion **301b**.

FIG. 4 illustrates camera fastener **303** interacting with first bracket **301** and second bracket **302**. Camera **105** can comprise a camera fastener receiver **401**, as is common in most cameras. In one embodiment, camera fastener body **303b** and camera fastener receiver **401** can be threaded. In one embodiment, camera **105** can be attached to bracket system **102** FIG. 1 by inserting camera fastener body through aperture **306** and aperture **307**, and securing camera fastener **303** into camera receiver **401**. In one embodiment, camera fastener **303** can be

4

secured either by screwing or some other secure fashion known in the art. In one embodiment, first bracket **301** and second bracket **302** can be pressed against each other when camera fastener **303** is secured into camera receiver **401**. Further, in one embodiment, the pressure created from securing the camera fastener **303** in camera fastener receiver **401** compresses first bracket **301** against second bracket **302** such that second bracket **302** can no longer move freely relative to first bracket **301**. In one embodiment, a washer can be placed between the camera fastener head **303a** and bracket system **102** FIG. 1. Further, in one embodiment, at least a portion of each surface of first bracket **301** and second bracket **302** can have a high coefficient of friction where first bracket **301** and second bracket **302** touch, thereby creating grip. A high coefficient of friction can be achieved using a rough surface as opposed to a smooth surface, or a material such as rubber. In another embodiment, a washer can be placed between the camera fastener head **303a**, first bracket **301**, and/or second bracket **302**. In such embodiment, such washer can be made of an elastic or deformable material, such as rubber.

In another embodiment, camera **105** can be held in bracket system **102** FIG. 1 by a combination of camera fastener **303**, side portion **301a**, and side portion **302a**. In one embodiment, side portion **301a** and side portion **302a** restrain rotary movement of camera **105** about the central axis of camera fastener **303**. In another embodiment, where bracket system **102** FIG. 1 comprises a single side portion, camera **105** can be held in bracket system **102** FIG. 1 by said single side portion and camera fastener **303**.

FIG. 5A illustrates hinge system **103a** and a portion of camera arm mount system **100** FIG. 1 in a detached position. Camera arm mount system **100** FIG. 1 can comprise an attached position where bracket system **102** FIG. 1 is attached to arm mount **101** FIG. 1, and said detached position where they are detached from one another. Hinge system **103a** can comprise a flexible portion **501** and a plurality of clasp devices **502**. Clasp devices **502** can comprise a first portion **502a** and a second portion **502b**. Flexible portion **501** can comprise a first portion **501a**, a second portion **501b**, and a bending point **503**. In one embodiment, first portion **501a** can attach to second side **305** and second portion **501b** can attach to second portion **502b**, as shown in FIG. 5A. In one embodiment, flexible portion **501** can be made of a flexible material such as leather, cloth, or rubber. In such embodiment, bending point **503** will naturally occur between first portion **501a** and second portion **501b**. In one embodiment, bending point **503** serves as a pivot point for hinge system **103a**.

In one embodiment, clasp devices **502** can be used to attach and detach bracket system **102** FIG. 1 from arm mount **101** FIG. 1. For example, in one embodiment, first portion **502a** and second portion **502b** can comprise opposite components of hook-and-loop fasteners, such as Velcro®. In such an embodiment, users of camera arm mount system **100** FIG. 1 could easily remove camera **105** (along with bracket system **102** FIG. 1) from arm mount **101** FIG. 1 by pulling first portion **502a** apart from second portion **502b**. Further, in such an embodiment, “pulling apart” can comprise applying adequate force to release first portion **502a** from second portion **502b**, causing the hooks and loops to release from one another without removing first portion **502a** and second portion **502b** from their respective underlying surfaces. Likewise, users could easily reassemble camera arm mount system **100** FIG. 1 by reattaching first portion **502a** to second portion **502b**. In one embodiment, clasp devices **502** can comprise a reusable adhesive material capable of attaching and detaching one or more times. In yet another embodiment,

5

clasping devices **502** can comprise a set of magnets capable of attaching and detaching from one another.

FIG. 5B illustrates alternate hinge system **103b** and a portion of camera arm mount system **100** FIG. 1 in a detached position. Alternate hinge system **103b** can comprise a first clasping device **504** and a second clasping device **505**. In one embodiment, alternate hinge system **103b** can attach arm mount **101** FIG. 1 to bracket system **102** FIG. 1. For example, in one embodiment, first clasping device **504** can be attached to second side **208** and second clasping device **505** can be attached to second side **305**. Further, in another embodiment, first clasping device **504** can be attached to second side **305** and second clasping device **505** can be attached to second side **208**.

First clasping device **504** can comprise a first end portion **504a** and a second end portion **504b**. Second clasping device **505** can comprise a middle portion **506**, a sleeve **507**, one or more connecting portions, and one or more release paddles. First end portion **504a** can comprise a first socket **510a** and second end portion **504b** can comprise a second socket **510b**. Connecting portions can comprise a first connector **508a** and a second connector **508b**. Release paddles can comprise a first release paddle **509a** and a second release paddle **509b**. In one embodiment, first end portion **504a** and second end portion **504b** can be arranged such that a first socket **510a** and a second socket **510b** face one another on a single axis.

In one embodiment, middle portion **506** can be attached to either second side **305** or second side **208**. In one embodiment, sleeve **507** attaches to middle portion **506**. In one embodiment, middle portion **506** wraps around and holds sleeve **507**. In one embodiment, first connector **508a** and second connector **508b** attach at opposite ends of sleeve **507**. In another embodiment, connecting portions be spring loaded into sleeve **507** such that connecting portions push outward and away from sleeve **507**. In one such embodiment, connecting portions can be spring loaded by placing a spring inside of sleeve **507**, inserting connecting portions into opposing ends of sleeve **506**, compressing said spring, and providing a stop to keep connecting portions from sliding out of and apart from middle portion **507**. In one embodiment, a first release paddle **509a** can be attached to first connector **508a**. In another embodiment, a second release paddle **509b** can be attached to second connector **508b**. In one embodiment, one or more release paddles can be pressed toward sleeve **507**, against said spring load inside of sleeve **507**, to reduce the length of second clasping device **505**.

In one embodiment, connecting portions can each comprise a head **511** at their ends opposite the end inserted into sleeve **507**. In one embodiment, the external circumference of heads **511** can be identical to or smaller than the internal circumference of sockets **510**. In one embodiment, bracket system **102** FIG. 1 can be attached to arm mount **101** FIG. 1 by pressing one or more release paddles toward sleeve **507**, inserting a first head **511a** into first socket **510a**, aligning second head **511b** with second socket **510b**, releasing one or more release paddles, and allowing second head **511b** to insert into second socket **510b**. Likewise, in one embodiment, bracket system **102** FIG. 1 can be removed from arm mount **101** FIG. 1 by pressing one or more release paddles toward sleeve **507**, removing heads **511** from sockets **510**, and allowing release paddles to return to their original position.

FIG. 6 illustrates camera arm mount system **100** FIG. 1 in an in-use position. In one embodiment, camera arm mount system **100** FIG. 1 can be configured in said in-use position wherein bracket system **102** FIG. 1 is substantially perpendicular to top surface **205** of arm mount **101** FIG. 1. In such an embodiment, camera arm mount system **100** FIG. 1 is said

6

to be in-use since camera **105** can be operated while in this position. The camera arm mount system **100** FIG. 1 can comprise a non-use position clasping device **601**. Non-use position clasping device **601** can comprise a first portion **601a** and a second portion **601b**. In one embodiment, the non-use position clasping device **601** can be a one or more magnets. For example, side portion **301a** can be made of a ferromagnetic material. In such embodiment, second portion **601b** can comprise one or more magnets attached to arm mount **101** FIG. 1. In another embodiment, at least a portion of arm mount **101** FIG. 1 can be made of a ferromagnetic material. In such embodiment, first portion **601a** can comprise of one or more magnets attached to side portion **301a**. In another embodiment, non-use position clasping device **601** can comprise a plurality of magnets, one set attached to side portion **301a** and the other set attached to arm mount **101** FIG. 1. In another embodiment, clasp device **601** can be a pair of hook-and-loop fasteners, such as Velcro®, wherein first portion **601a** is attached to side portion **301a** and second portion **601b** is attached to arm mount **101** FIG. 1, as shown in FIG. 6. In another embodiment, arm mount **101** FIG. 1 can comprise a latch that “catches” or receives side portion **301a**. A person having ordinary skill in the art will recognize that there are many suitable variations of non-use position clasping device **601**.

FIG. 7 illustrates camera arm mount system **100** FIG. 1 in a non-use position. In one embodiment, camera arm mount system **100** FIG. 1 can be configured in a non-use position wherein bracket system **102** FIG. 1 is substantially parallel to top surface **205** of arm mount **101**. FIG. 1 In such an embodiment, camera arm mount system **100** FIG. 1 is said to be not in use, or in said non-use position, since camera **105** is substantially stored and not in use while in this position. Placing camera **105** in a non-use position can help prevent damage to camera when it is not being used.

Various changes in the details of the illustrated operational methods are possible without departing from the scope of the following claims. Some embodiments may combine the activities described herein as being separate steps. Similarly, one or more of the described steps may be omitted, depending upon the specific operational environment the method is being implemented in. It is to be understood that the above description is intended to be illustrative, and not restrictive. For example, the above-described embodiments may be used in combination with each other. Many other embodiments will be apparent to those of skill in the art upon reviewing the above description. The scope of the invention should, therefore, be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled. In the appended claims, the terms “including” and “in which” are used as the plain-English equivalents of the respective terms “comprising” and “wherein.”

The invention claimed is:

1. A camera arm mount system comprising:
 - a bracket system capable of supporting a camera;
 - an arm mount; and
 - a hinge system comprising a clasping device having a first portion and a second portion; wherein
 - said hinge system connects said bracket system and said arm mount;
 - said first portion and said second portion of said clasping device are capable of selectively releasing and reattaching to one another and thereby release and reattach said bracket system and said arm mount; and
 - said first portion and said second portion of said clasping device comprise magnets.

7

2. The camera arm mount system of claim 1 wherein said hinge system comprises a flexible portion comprising a flexible material.

3. The camera arm mount system of claim 2 wherein said flexible material comprises leather.

4. The camera arm mount system of claim 2 wherein said flexible material comprises a textile.

5. The camera arm mount system of claim 2 further comprising

a bending point in said flexible material between a first portion and a second portion of said flexible portion; wherein said bending point serves as a pivot point for said hinge system.

6. The camera arm mount system of claim 1 wherein: said first portion of said clasp device comprises a first end portion and a second end portion, and said second portion of said clasp device inserts between said first end portion and said second end portion.

7. The camera arm mount system of claim 6 wherein said second portion of said clasp device comprises

a sleeve,
a first connector, and
a second connector; wherein
said first connector and said second connector insert into opposite ends of said sleeve.

8. The camera arm mount system of claim 7 further comprising:

a spring force pushing said first connector and second connector outward away from the midpoint of said sleeve;

a stop prohibiting said first connector and said second connector from sliding out of and away from said sleeve;
a first socket in said first end portion and a second socket in said second end portion, wherein said first socket and said second socket face one another and are aligned on a common axis;

a first head and a second head attached at opposite ends of said second portion of said clasp device; and

a first release paddle attached to said first connector and a second release paddle attached to said second connector, each capable of providing a grip to press the respective connectors inward toward said sleeve.

9. The camera arm mount system of claim 8 wherein said first portion and said second portion of said clasp device attach to one another by

inserting said first head into said first socket,
compressing said first connector into said sleeve,
inserting said second head into said second socket, and
releasing said first connector to allow said second portion of said clasp device to nest inside of said first portion of said clasp device.

10. The camera arm mount system of claim 8 wherein said first portion and said second portion of said clasp device release from one another by

compressing said first connector into said sleeve,
pulling said first head out of and away from said first socket,
removing said second head from said second socket, and
releasing compression from said first connector.

11. The camera arm mount system of claim 1 further comprising

an in-use position wherein said bracket system is substantially perpendicular to a top surface of said arm mount;
a non-use position wherein said bracket system is substantially parallel to said top surface of said arm mount; and

8

a non-use position clasp device, having a first portion attached to said bracket system and a second portion attached to said arm mount.

12. The camera arm mount system of claim 11 wherein said first portion and said second portion of said non-use position clasp device can attach to one another when said camera arm mount system is in said non-use position.

13. The camera arm mount system of claim 12 wherein said non-use position clasp device comprises two opposing strips of hook-and-loop fasteners.

14. The camera arm mount system of claim 12 wherein said non-use position clasp device comprises one or more magnets.

15. A camera arm mount system comprising:

a bracket system capable of supporting a camera;
an arm mount;

a hinge system comprising a clasp device having a first portion and a second portion;
said hinge system connects said bracket system and said arm mount;

said first portion and said second portion of said clasp device are capable of selectively releasing and reattaching to one another and thereby release and reattach said bracket system and said arm mount; and
said first portion and said second portion of said clasp device comprise opposing strips of hook-and-loop fasteners.

16. The camera arm mount system of claim 15 wherein said hinge system comprises a flexible portion comprising a flexible material.

17. The camera arm mount system of claim 15 further comprising

a bending point in said flexible material between a first portion and a second portion of said flexible portion;
wherein said bending point serves as a pivot point for said hinge system.

18. A camera arm mount system comprising:

a bracket system capable of supporting a camera;
an arm mount;

a hinge system comprising a clasp device having a first portion and a second portion;
said hinge system connects said bracket system and said arm mount;

said first portion and said second portion of said clasp device are capable of selectively releasing and reattaching to one another and thereby release and reattach said bracket system and said arm mount;

a spring force pushing said first connector and second connector outward away from the midpoint of said sleeve;

a stop prohibiting said first connector and said second connector from sliding out of and away from said sleeve;
a first socket in said first end portion and a second socket in said second end portion, wherein said first socket and said second socket face one another and are aligned on a common axis;

a first head and a second head attached at opposite ends of said second portion of said clasp device; and

a first release paddle attached to said first connector and a second release paddle attached to said second connector, each capable of providing a grip to press the respective connectors inward toward said sleeve.

19. The camera arm mount system of claim 18 wherein said first portion and said second portion of said clasp device attach to one another by

inserting said first head into said first socket,
compressing said first connector into said sleeve,

inserting said second head into said second socket, and
releasing said first connector to allow said second portion
of said clasping device to nest inside of said first portion
of said clasping device.

20. The camera arm mount system of claim 18 wherein said 5
first portion and said second portion of said clasping device
release from one another by
compressing said first connector into said sleeve,
pulling said first head out of and away from said first
socket, 10
removing said second head from said second socket, and
releasing compression from said first connector.

* * * * *